

---

Documentation for package "reportlab.graphics"  
Generated by: graphdocpy.py version 0.8  
Date generated: 2012-07-30 12:25  
Format: PDF

---

reportlab.graphics	11
scatter_lines_markers . . . . .	11
Classes . . . . .	11
ScatterLinesMarkers(_DrawingEditorMixin,	
Drawing) . . . . .	11
line_chart . . . . .	12
Classes . . . . .	12
LineChart(_DrawingEditorMixin, Drawing) . . . .	12
scatter . . . . .	13
Classes . . . . .	13
Scatter(_DrawingEditorMixin, Drawing) . . . . .	13
bubble . . . . .	14
Classes . . . . .	15
Bubble(_DrawingEditorMixin, Drawing) . . . . .	15
linechart_with_markers . . . . .	16
Classes . . . . .	16
LineChartWithMarkers(_DrawingEditorMixin,	
Drawing) . . . . .	16
exploded_pie . . . . .	17
Classes . . . . .	17
ExplodedPie(_DrawingEditorMixin, Drawing) . .	17
scatter_lines . . . . .	19
Classes . . . . .	19
ScatterLines(_DrawingEditorMixin, Drawing) . .	19
simple_pie . . . . .	20
Classes . . . . .	20
SimplePie(_DrawingEditorMixin, Drawing) . . . .	20
clustered_column . . . . .	21
Classes . . . . .	21
ClusteredColumn(_DrawingEditorMixin, Drawing)	21
radar . . . . .	22
Classes . . . . .	23
RadarChart(_DrawingEditorMixin, Drawing) . . .	23
clustered_bar . . . . .	24
Classes . . . . .	24
ClusteredBar(_DrawingEditorMixin, Drawing) . .	24
stacked_bar . . . . .	25
Classes . . . . .	25
StackedBar(_DrawingEditorMixin, Drawing) . . .	25
filled_radar . . . . .	27
Classes . . . . .	27

---

	FilledRadarChart(_DrawingEditorMixin, Drawing)	27
stacked_column . . . . .		28
Classes . . . . .		28
	StackedColumn(_DrawingEditorMixin, Drawing)	28
signsandsymbols . . . . .		29
Classes . . . . .		30
	ArrowOne(_Symbol)	30
	Public Attributes	30
	ArrowTwo(ArrowOne)	30
	Public Attributes	30
	Crossbox(_Symbol)	30
	Public Attributes	31
	DangerSign(_Symbol)	31
	Public Attributes	31
	ETriangle(_Symbol)	31
	Public Attributes	31
	FloppyDisk(_Symbol)	32
	Public Attributes	32
	NoEntry(_Symbol)	32
	Public Attributes	32
	NoSmoking(NotAllowed)	32
	Public Attributes	33
	NotAllowed(_Symbol)	33
	Public Attributes	33
	Octagon(_Symbol)	33
	Public Attributes	33
	RTriangle(_Symbol)	34
	Public Attributes	34
	SmileyFace(_Symbol)	34
	Public Attributes	34
	StopSign(_Symbol)	34
	Public Attributes	35
	Tickbox(_Symbol)	35
	Public Attributes	35
	YesNo(_Symbol)	35
	Public Attributes	35
	_Symbol(Widget)	36
	Public Attributes	36
grids . . . . .		36
Classes . . . . .		36

---

DoubleGrid(Widget)	36
Public Attributes	36
Grid(Widget)	38
Public Attributes	38
ShadedPolygon(Widget, LineShape)	40
Public Attributes	40
ShadedRect(Widget)	41
Public Attributes	41
eventcal	42
Classes	42
EventCalendar(Widget)	42
Public Attributes	42
table	43
Classes	43
TableWidget(Widget)	43
Public Attributes	43
markers	45
Classes	45
Marker(Widget)	45
Public Attributes	45
flags	46
Classes	46
Flag(_Symbol)	46
Public Attributes	46
Star(_Symbol)	47
Public Attributes	47
barcharts	47
Classes	47
BarChart(PlotArea)	47
Public Attributes	47
BarChart3D(BarChart)	48
Public Attributes	48
HorizontalBarChart(BarChart)	49
Public Attributes	49
HorizontalBarChart3D(BarChart3D, HorizontalBarChart)	52
Public Attributes	52
SampleH5c4(Drawing)	55
VerticalBarChart(BarChart)	55
Public Attributes	55
VerticalBarChart3D(BarChart3D, VerticalBarChart) <sup>59</sup>	

---

	Public Attributes . . . . .	59
Functions . . . . .		62
	sampleH0a( ... ) . . . . .	62
	sampleH0b( ... ) . . . . .	63
	sampleH0c( ... ) . . . . .	64
	sampleH1( ... ) . . . . .	65
	sampleH2a( ... ) . . . . .	66
	sampleH2b( ... ) . . . . .	67
	sampleH2c( ... ) . . . . .	68
	sampleH3( ... ) . . . . .	70
	sampleH4a( ... ) . . . . .	72
	sampleH4b( ... ) . . . . .	73
	sampleH4c( ... ) . . . . .	74
	sampleH4d( ... ) . . . . .	75
	sampleH5a( ... ) . . . . .	76
	sampleH5b( ... ) . . . . .	77
	sampleH5c1( ... ) . . . . .	78
	sampleH5c2( ... ) . . . . .	79
	sampleH5c3( ... ) . . . . .	80
	sampleH5c4( ... ) . . . . .	81
	sampleStacked1( ... ) . . . . .	82
	sampleSymbol1( ... ) . . . . .	84
	sampleV0a( ... ) . . . . .	86
	sampleV0b( ... ) . . . . .	87
	sampleV0c( ... ) . . . . .	88
	sampleV1( ... ) . . . . .	89
	sampleV2a( ... ) . . . . .	90
	sampleV2b( ... ) . . . . .	91
	sampleV2c( ... ) . . . . .	92
	sampleV3( ... ) . . . . .	94
	sampleV4a( ... ) . . . . .	96
	sampleV4b( ... ) . . . . .	97
	sampleV4c( ... ) . . . . .	98
	sampleV4d( ... ) . . . . .	99
	sampleV5a( ... ) . . . . .	100
	sampleV5b( ... ) . . . . .	101
	sampleV5c1( ... ) . . . . .	102
	sampleV5c2( ... ) . . . . .	103
	sampleV5c3( ... ) . . . . .	104
	sampleV5c4( ... ) . . . . .	105

---

linecharts . . . . .	106
Classes . . . . .	106
AbstractLineChart(PlotArea) . . . . .	106
Public Attributes . . . . .	106
HorizontalLineChart(LineChart) . . . . .	107
Public Attributes . . . . .	107
HorizontalLineChart3D(HorizontalLineChart) . . . . .	111
Public Attributes . . . . .	111
LineChart(AbstractLineChart) . . . . .	114
Public Attributes . . . . .	114
SampleHorizontalLineChart(HorizontalLineChart) . . . . .	115
Public Attributes . . . . .	115
VerticalLineChart(LineChart) . . . . .	118
Public Attributes . . . . .	118
Functions . . . . .	119
sample1( ... ) . . . . .	119
sample1a( ... ) . . . . .	120
sample2( ... ) . . . . .	121
sample3( ... ) . . . . .	122
slidebox . . . . .	123
Classes . . . . .	123
SlideBox(Widget) . . . . .	123
Public Attributes . . . . .	123
spider . . . . .	125
Classes . . . . .	125
SpiderChart(PlotArea) . . . . .	125
Public Attributes . . . . .	125
SpokeLabel(WedgeLabel) . . . . .	127
Public Attributes . . . . .	127
StrandLabel(SpokeLabel) . . . . .	129
Public Attributes . . . . .	129
Functions . . . . .	131
sample1( ... ) . . . . .	131
sample2( ... ) . . . . .	133
piecharts . . . . .	135
Classes . . . . .	135
AbstractPieChart(PlotArea) . . . . .	135
Public Attributes . . . . .	135
LegendedPie(Pie) . . . . .	136
Public Attributes . . . . .	136

---

	Pie(AbstractPieChart)	139
	Public Attributes	139
	Pie3d(Pie)	141
	Public Attributes	141
	WedgeLabel(Label)	143
	Public Attributes	143
Functions		145
	sample0a( ... )	145
	sample0b( ... )	146
	sample1( ... )	147
	sample2( ... )	148
	sample3( ... )	149
	sample4( ... )	150
dotbox		151
	Classes	151
	DotBox(Widget)	151
	Public Attributes	151
doughnut		153
	Classes	153
	Doughnut(AbstractPieChart)	153
	Public Attributes	153
	Functions	155
	sample1( ... )	155
	sample2( ... )	157
	sample3( ... )	158
lineplots		159
	Classes	159
	AreaLinePlot(LinePlot)	159
	Public Attributes	159
	GridLinePlot(LinePlot)	163
	Public Attributes	163
	LinePlot(AbstractLineChart)	168
	Public Attributes	168
	LinePlot3D(LinePlot)	172
	Public Attributes	172
	ScatterPlot(LinePlot)	176
	Public Attributes	176
	ShadedPolyFiller(Filler, ShadedPolygon)	180
	Public Attributes	180
	SplitLinePlot(AreaLinePlot)	181

---

	Public Attributes . . . . .	181
Functions . . . . .		188
	sample1a( ... ) . . . . .	188
	sample1b( ... ) . . . . .	189
	sample1c( ... ) . . . . .	190
	sample2( ... ) . . . . .	191
axes . . . . .		193
Classes . . . . .		193
	AdjYValueAxis(YValueAxis) . . . . .	193
	Public Attributes . . . . .	193
	CALabel(Label) . . . . .	197
	Public Attributes . . . . .	197
	CategoryAxis(_AxisG) . . . . .	199
	Public Attributes . . . . .	199
	NormalDateXValueAxis(XValueAxis) . . . . .	200
	Public Attributes . . . . .	200
	ValueAxis(_AxisG) . . . . .	204
	Public Attributes . . . . .	204
	XCategoryAxis(_XTicks, CategoryAxis) . . . . .	205
	Public Attributes . . . . .	205
	XValueAxis(_XTicks, ValueAxis) . . . . .	206
	Public Attributes . . . . .	206
	YCategoryAxis(_YTicks, CategoryAxis) . . . . .	210
	Public Attributes . . . . .	210
	YValueAxis(_YTicks, ValueAxis) . . . . .	211
	Public Attributes . . . . .	211
	_AxisG(Widget) . . . . .	214
	Public Attributes . . . . .	214
Functions . . . . .		215
	sample0a( ... ) . . . . .	215
	sample0b( ... ) . . . . .	216
	sample1( ... ) . . . . .	217
	sample4a( ... ) . . . . .	218
	sample4b( ... ) . . . . .	219
	sample4c( ... ) . . . . .	220
	sample4c1( ... ) . . . . .	221
	sample4d( ... ) . . . . .	222
	sample5a( ... ) . . . . .	223
	sample5b( ... ) . . . . .	224
	sample5c( ... ) . . . . .	225



	sample5d( ... ) . . . . .	226
	sample6a( ... ) . . . . .	227
	sample6b( ... ) . . . . .	228
	sample6c( ... ) . . . . .	229
	sample6d( ... ) . . . . .	230
	sample7a( ... ) . . . . .	231
	sample7b( ... ) . . . . .	232
	sample7c( ... ) . . . . .	233
	sample7d( ... ) . . . . .	234
areas . . . . .		235
Classes . . . . .		235
PlotArea(Widget) . . . . .		235
Public Attributes . . . . .		235
markers . . . . .		236
Classes . . . . .		236
Marker(Widget) . . . . .		236
Public Attributes . . . . .		236
legends . . . . .		237
Classes . . . . .		237
Legend(Widget) . . . . .		237
Public Attributes . . . . .		237
LineLegend(Legend) . . . . .		240
Public Attributes . . . . .		240
LineSwatch(Widget) . . . . .		242
Public Attributes . . . . .		242
Functions . . . . .		243
sample1c( ... ) . . . . .		243
sample2c( ... ) . . . . .		244
sample3( ... ) . . . . .		245
sample3a( ... ) . . . . .		246
textlabels . . . . .		247
Classes . . . . .		247
BarChartLabel(Label) . . . . .		247
Public Attributes . . . . .		247
Label(Widget) . . . . .		249
Public Attributes . . . . .		249
NA_Label(BarChartLabel) . . . . .		251
Public Attributes . . . . .		251
qr . . . . .		253
Classes . . . . .		253

---

	QrCodeWidget(PlotArea) . . . . .	253
	Public Attributes . . . . .	253
eanbc . . . . .		255
	Classes . . . . .	255
	Ean13BarcodeWidget(PlotArea) . . . . .	255
	Public Attributes . . . . .	255
	Ean8BarcodeWidget(Ean13BarcodeWidget) . . . . .	256
	Public Attributes . . . . .	256

---

## reportlab.graphics

### scatter\_lines\_markers

#Autogenerated by ReportLab guiedit do not edit


## Classes

### ScatterLinesMarkers(\_DrawingEditorMixin, Drawing)

#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,ScatterPlot(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.lines[0].strokeColor = color01
    self.chart.lines[1].strokeColor = color02
    self.chart.lines[2].strokeColor = color03
    self.chart.lines[3].strokeColor = color04
    self.chart.lines[4].strokeColor = color05
    self.chart.lines[5].strokeColor = color06
    self.chart.lines[6].strokeColor = color07
    self.chart.lines[7].strokeColor = color08
    self.chart.lines[8].strokeColor = color09
    self.chart.lines[9].strokeColor = color10
    self.chart.fillColor = backgroundGrey
    self.chart.lineLabels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontSize = 7
    self.chart.xValueAxis.forceZero = 0
    self.chart.data = [((100,100), (200,200), (250,210), (300,300), (400,500)), ((100,100), (200,200), (250,210), (300,300), (400,500))]
    self.chart.xValueAxis.avoidBoundFrac = 1
    self.chart.xValueAxis.gridEnd = 115
    self.chart.xValueAxis.tickDown = 3
    self.chart.xValueAxis.visibleGrid = 1
    self.chart.yValueAxis.tickLeft = 3
    self.chart.yValueAxis.labels.fontName = 'Helvetica'
    self.chart.yValueAxis.labels.fontSize = 7
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 153
    self.Legend.y = 85
    self.Legend.dxTextSpace = 5
    self.Legend.dy = 5
    self.Legend.dx = 5
    self.Legend.deltay = 5
    self.Legend.alignment = 'right'
    self.chart.lineLabelFormat = None
    self.chart.xLabel = 'X Axis'
    self.chart.y = 30
    self.chart.yLabel = 'Y Axis'
    self.chart.yValueAxis.gridEnd = 115
    self.chart.yValueAxis.visibleGrid = 1
    self.chart.yValueAxis.labelTextFormat = '%d'
    self.chart.yValueAxis.forceZero = 1
    self.chart.xValueAxis.forceZero = 1
    self.chart.joinedLines = 1
```

```
self._add(self,0,name='preview',validate=None,desc=None)
```

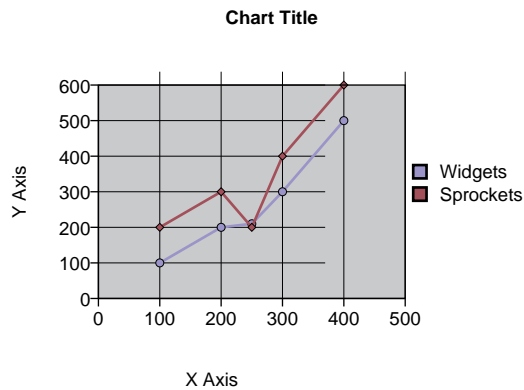

## line\_chart

#Autogenerated by ReportLab guiedit do not edit

## Classes

### LineChart(\_DrawingEditorMixin, Drawing)


#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,LinePlot(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.lines[0].strokeColor = color01
    self.chart.lines[1].strokeColor = color02
    self.chart.lines[2].strokeColor = color03
    self.chart.lines[3].strokeColor = color04
    self.chart.lines[4].strokeColor = color05
    self.chart.lines[5].strokeColor = color06
    self.chart.lines[6].strokeColor = color07
    self.chart.lines[7].strokeColor = color08
    self.chart.lines[8].strokeColor = color09
    self.chart.lines[9].strokeColor = color10
    self.chart.fillColor = backgroundGrey
    self.chart.lineLabels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontSize = 7
    self.chart.xValueAxis.forceZero = 0
    self.chart.data = [(0, 50), (100,100), (200,200), (250,210), (300,300), (400,500)]
    self.chart.xValueAxis.avoidBoundFrac = 1
    self.chart.xValueAxis.gridEnd = 115
    self.chart.xValueAxis.tickDown = 3
    self.chart.xValueAxis.visibleGrid = 1
    self.chart.yValueAxis.tickLeft = 3
    self.chart.yValueAxis.labels.fontName = 'Helvetica'
    self.chart.yValueAxis.labels.fontSize = 7
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
```

```

self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName      = 'Helvetica'
self.Legend.fontSize      = 7
self.Legend.x              = 153
self.Legend.y              = 85
self.Legend.dxTextSpace   = 5
self.Legend.dy             = 5
self.Legend.dx             = 5
self.Legend.deltay        = 5
self.Legend.alignment      = 'right'
self._add(self,Label(),name='XLabel',validate=None,desc="The label on the horizontal axis")
self.XLabel.fontName      = 'Helvetica'
self.XLabel.fontSize      = 7
self.XLabel.x              = 85
self.XLabel.y              = 10
self.XLabel.textAnchor     = 'middle'
self.XLabel.maxWidth      = 100
self.XLabel.height        = 20
self.XLabel._text         = "X Axis"
self._add(self,Label(),name='YLabel',validate=None,desc="The label on the vertical axis")
self.YLabel.fontName      = 'Helvetica'
self.YLabel.fontSize      = 7
self.YLabel.x              = 12
self.YLabel.y              = 80
self.YLabel.angle          = 90
self.YLabel.textAnchor    = 'middle'
self.YLabel.maxWidth      = 100
self.YLabel.height        = 20
self.YLabel._text         = "Y Axis"
self.chart.yValueAxis.forceZero = 1
self.chart.xValueAxis.forceZero = 1
self._add(self,0,name='preview',validate=None,desc=None)

```

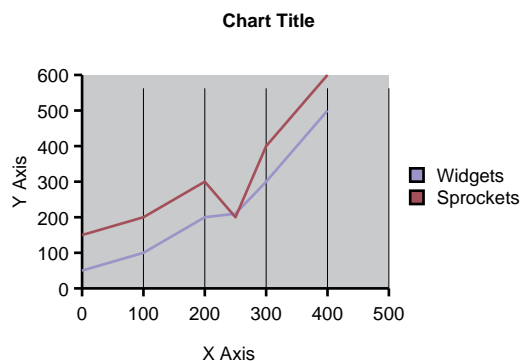

## scatter

#Autogenerated by ReportLab guiedit do not edit

## Classes

### Scatter(\_DrawingEditorMixin, Drawing)

#### Example

```

def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,ScatterPlot(),name='chart',validate=None,desc="The main chart")
    self.chart.width      = 115
    self.chart.height     = 80
    self.chart.x           = 30
    self.chart.y           = 40


```

```

self.chart.lines[0].strokeColor = color01
self.chart.lines[1].strokeColor = color02
self.chart.lines[2].strokeColor = color03
self.chart.lines[3].strokeColor = color04
self.chart.lines[4].strokeColor = color05
self.chart.lines[5].strokeColor = color06
self.chart.lines[6].strokeColor = color07
self.chart.lines[7].strokeColor = color08
self.chart.lines[8].strokeColor = color09
self.chart.lines[9].strokeColor = color10
self.chart.fillColor = backgroundGrey
self.chart.lineLabels.fontName = 'Helvetica'
self.chart.xValueAxis.labels.fontName = 'Helvetica'
self.chart.xValueAxis.labels.fontSize = 7
self.chart.xValueAxis.forceZero = 0
self.chart.data = [(100,100), (200,200), (250,210), (300,300), (400,500)], ((100,200), (200,300), (300,400), (400,500)), ((100,100), (200,200), (300,300), (400,400)), ((100,200), (200,300), (300,400), (400,500)), ((100,100), (200,200), (300,300), (400,400)), ((100,200), (200,300), (300,400), (400,500)), ((100,100), (200,200), (300,300), (400,400)), ((100,200), (200,300), (300,400), (400,500)), ((100,100), (200,200), (300,300), (400,400)), ((100,200), (200,300), (300,400), (400,500)))
self.chart.xValueAxis.avoidBoundFrac = 1
self.chart.xValueAxis.gridEnd = 115
self.chart.xValueAxis.tickDown = 3
self.chart.xValueAxis.visibleGrid = 1
self.chart.yValueAxis.tickLeft = 3
self.chart.yValueAxis.labels.fontName = 'Helvetica'
self.chart.yValueAxis.labels.fontSize = 7
self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
self.Title.fontName = 'Helvetica-Bold'
self.Title.fontSize = 7
self.Title.x = 100
self.Title.y = 135
self.Title._text = 'Chart Title'
self.Title.maxWidth = 180
self.Title.height = 20
self.Title.textAnchor = 'middle'
self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName = 'Helvetica'
self.Legend.fontSize = 7
self.Legend.x = 153
self.Legend.y = 85
self.Legend.dxTextSpace = 5
self.Legend.dy = 5
self.Legend.dx = 5
self.Legend.deltay = 5
self.Legend.alignment = 'right'
self.chart.lineLabelFormat = None
self.chart.xLabel = 'X Axis'
self.chart.y = 30
self.chart.yLabel = 'Y Axis'
self.chart.yValueAxis.labelTextFormat = '%d'
self.chart.yValueAxis.forceZero = 1
self.chart.xValueAxis.forceZero = 1

self._add(self,0,name='preview',validate=None,desc=None)

```

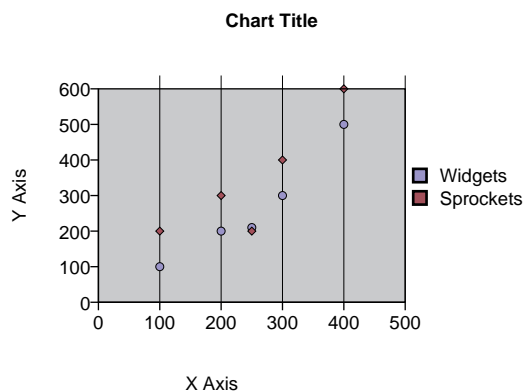

## bubble

#Autogenerated by ReportLab guiedit do not edit


## Classes

### Bubble(\_DrawingEditorMixin, Drawing)

#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,ScatterPlot(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.lines[0].strokeColor = color01
    self.chart.lines[1].strokeColor = color02
    self.chart.lines[2].strokeColor = color03
    self.chart.lines[3].strokeColor = color04
    self.chart.lines[4].strokeColor = color05
    self.chart.lines[5].strokeColor = color06
    self.chart.lines[6].strokeColor = color07
    self.chart.lines[7].strokeColor = color08
    self.chart.lines[8].strokeColor = color09
    self.chart.lines[9].strokeColor = color10
    self.chart.lines.symbol.kind = 'Circle'
    self.chart.lines.symbol.size = 15
    self.chart.fillColor = backgroundGrey
    self.chart.lineLabels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontSize = 7
    self.chart.xValueAxis.forceZero = 0
    self.chart.data = [((100,100), (200,200), (250,210), (300,300), (350,450))]
    self.chart.xValueAxis.avoidBoundFrac = 1
    self.chart.xValueAxis.gridEnd = 115
    self.chart.xValueAxis.tickDown = 3
    self.chart.xValueAxis.visibleGrid = 1
    self.chart.yValueAxis.tickLeft = 3
    self.chart.yValueAxis.labels.fontName = 'Helvetica'
    self.chart.yValueAxis.labels.fontSize = 7
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'Widgets')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 153
    self.Legend.y = 85
    self.Legend.dxTextSpace = 5
    self.Legend.dy = 5
    self.Legend.dx = 5
    self.Legend.deltay = 5
    self.Legend.alignment = 'right'
    self.chart.lineLabelFormat = None
    self.chart.xLabel = 'X Axis'
    self.chart.y = 30
    self.chart.yLabel = 'Y Axis'
    self.chart.yValueAxis.labelTextFormat = '%d'
    self.chart.yValueAxis.forceZero = 1
    self.chart.xValueAxis.forceZero = 1

    self._add(self,0,name='preview',validate=None,desc=None)
```

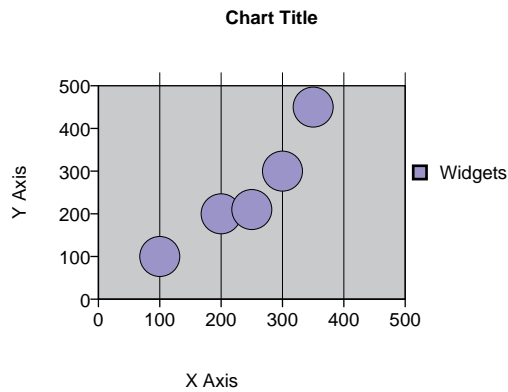

## linechart\_with\_markers

#Autogenerated by ReportLab guiedit do not edit

## Classes

### LineChartWithMarkers(\_DrawingEditorMixin, Drawing)

#### Example


```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,LinePlot(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.lines[0].strokeColor = color01
    self.chart.lines[1].strokeColor = color02
    self.chart.lines[2].strokeColor = color03
    self.chart.lines[3].strokeColor = color04
    self.chart.lines[4].strokeColor = color05
    self.chart.lines[5].strokeColor = color06
    self.chart.lines[6].strokeColor = color07
    self.chart.lines[7].strokeColor = color08
    self.chart.lines[8].strokeColor = color09
    self.chart.lines[9].strokeColor = color10
    self.chart.lines[0].symbol = makeMarker('FilledSquare')
    self.chart.lines[1].symbol = makeMarker('FilledDiamond')
    self.chart.lines[2].symbol = makeMarker('FilledStarFive')
    self.chart.lines[3].symbol = makeMarker('FilledTriangle')
    self.chart.lines[4].symbol = makeMarker('FilledCircle')
    self.chart.lines[5].symbol = makeMarker('FilledPentagon')
    self.chart.lines[6].symbol = makeMarker('FilledStarSix')
    self.chart.lines[7].symbol = makeMarker('FilledHeptagon')
    self.chart.lines[8].symbol = makeMarker('FilledOctagon')
    self.chart.lines[9].symbol = makeMarker('FilledCross')
    self.chart.fillColor = backgroundGrey
    self.chart.lineLabels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontSize = 7
    self.chart.xValueAxis.forceZero = 0
    self.chart.data = [(0, 50), (100,100), (200,200), (250,210), (300,300), (400,500)]
    self.chart.xValueAxis.avoidBoundFrac = 1
    self.chart.xValueAxis.gridEnd = 115
    self.chart.xValueAxis.tickDown = 3
    self.chart.xValueAxis.visibleGrid = 1
    self.chart.yValueAxis.tickLeft = 3
    self.chart.yValueAxis.labels.fontName = 'Helvetica'
    self.chart.yValueAxis.labels.fontSize = 7
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
```



```

self.Title.fontName      = 'Helvetica-Bold'
self.Title.fontSize      = 7
self.Title.x             = 100
self.Title.y             = 135
self.Title._text         = 'Chart Title'
self.Title.maxWidth      = 180
self.Title.height        = 20
self.Title.textAnchor    = 'middle'
self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName     = 'Helvetica'
self.Legend.fontSize     = 7
self.Legend.x            = 153
self.Legend.y            = 85
self.Legend.dxTextSpace  = 5
self.Legend.dy           = 5
self.Legend.dx           = 5
self.Legend.deltay       = 5
self.Legend.alignment    = 'right'
self._add(self,Label(),name='XLabel',validate=None,desc="The label on the horizontal axis")
self.XLabel.fontName     = 'Helvetica'
self.XLabel.fontSize     = 7
self.XLabel.x            = 85
self.XLabel.y            = 10
self.XLabel.textAnchor   = 'middle'
self.XLabel.maxWidth     = 100
self.XLabel.height       = 20
self.XLabel._text        = "X Axis"
self._add(self,Label(),name='YLabel',validate=None,desc="The label on the vertical axis")
self.YLabel.fontName     = 'Helvetica'
self.YLabel.fontSize     = 7
self.YLabel.x            = 12
self.YLabel.y            = 80
self.YLabel.angle        = 90
self.YLabel.textAnchor   = 'middle'
self.YLabel.maxWidth     = 100
self.YLabel.height       = 20
self.YLabel._text        = "Y Axis"
self.chart.yValueAxis.forceZero = 1
self.chart.xValueAxis.forceZero = 1
self._add(self,0,name='preview',validate=None,desc=None)

```

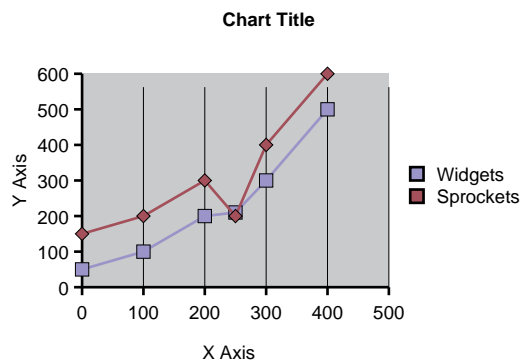

## exploded\_pie

#Autogenerated by ReportLab guiedit do not edit

## Classes


### ExplodedPie(\_DrawingEditorMixin, Drawing)

*Example*

```

def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,Pie(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 100
    self.chart.height = 100
    self.chart.x = 25
    self.chart.y = 25
    self.chart.slices[0].fillColor = color01
    self.chart.slices[1].fillColor = color02
    self.chart.slices[2].fillColor = color03
    self.chart.slices[3].fillColor = color04
    self.chart.slices[4].fillColor = color05
    self.chart.slices[5].fillColor = color06
    self.chart.slices[6].fillColor = color07
    self.chart.slices[7].fillColor = color08
    self.chart.slices[8].fillColor = color09
    self.chart.slices[9].fillColor = color10
    self.chart.data = (100, 150, 180)
    self.chart.startAngle = -90
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'North'), (color02, 'South'), (color03, 'Central')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 160
    self.Legend.y = 85
    self.Legend.dxTextSpace = 5
    self.Legend.dy = 5
    self.Legend.dx = 5
    self.Legend.deltay = 5
    self.Legend.alignment = 'right'
    self.Legend.columnMaximum = 10
    self.chart.slices.strokeWidth = 1
    self.chart.slices.fontName = 'Helvetica'
    self.background = ShadedRect()
    self.background.fillColorStart = backgroundGrey
    self.background.fillColorEnd = backgroundGrey
    self.background.numShades = 1
    self.background.strokeWidth = 0.5
    self.background.x = 20
    self.background.y = 20
    self.chart.slices.popout = 5
    self.background.height = 110
    self.background.width = 110
    self._add(self,0,name='preview',validate=None,desc=None)

```

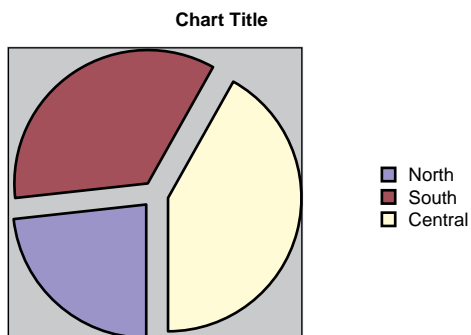

## scatter\_lines

#Autogenerated by ReportLab guiedit do not edit

## Classes

### ScatterLines(\_DrawingEditorMixin, Drawing)


#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,ScatterPlot(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.lines[0].strokeColor = color01
    self.chart.lines[1].strokeColor = color02
    self.chart.lines[2].strokeColor = color03
    self.chart.lines[3].strokeColor = color04
    self.chart.lines[4].strokeColor = color05
    self.chart.lines[5].strokeColor = color06
    self.chart.lines[6].strokeColor = color07
    self.chart.lines[7].strokeColor = color08
    self.chart.lines[8].strokeColor = color09
    self.chart.lines[9].strokeColor = color10
    self.chart.lines[0].symbol = None
    self.chart.lines[1].symbol = None
    self.chart.lines[2].symbol = None
    self.chart.lines[3].symbol = None
    self.chart.lines[4].symbol = None
    self.chart.lines[5].symbol = None
    self.chart.lines[6].symbol = None
    self.chart.lines[7].symbol = None
    self.chart.lines[8].symbol = None
    self.chart.lines[9].symbol = None
    self.chart.fillColor = backgroundGrey
    self.chart.lineLabels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontName = 'Helvetica'
    self.chart.xValueAxis.labels.fontSize = 7
    self.chart.xValueAxis.forceZero = 0
    self.chart.data = [((100,100), (200,200), (250,210), (300,300), (400,500)), ((100,500), (200,400), (250,390), (300,300), (400,500))]
    self.chart.xValueAxis.avoidBoundFrac = 1
    self.chart.xValueAxis.gridEnd = 115
    self.chart.xValueAxis.tickDown = 3
    self.chart.xValueAxis.visibleGrid = 1
    self.chart.yValueAxis.tickLeft = 3
    self.chart.yValueAxis.labels.fontName = 'Helvetica'
    self.chart.yValueAxis.labels.fontSize = 7
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 153
    self.Legend.y = 85
    self.Legend.dxTextSpace = 5
    self.Legend.dy = 5
    self.Legend.dx = 5
    self.Legend.deltay = 5
    self.Legend.alignment = 'right'
    self.chart.lineLabelFormat = None
    self.chart.xLabel = 'X Axis'
    self.chart.y = 30
```

```

self.chart.yLabel = 'Y Axis'
self.chart.yValueAxis.gridEnd = 115
self.chart.yValueAxis.visibleGrid = 1
self.chart.yValueAxis.labelTextFormat = '%d'
self.chart.yValueAxis.forceZero = 1
self.chart.xValueAxis.forceZero = 1
self.chart.joinedLines = 1
self._add(self,0,name='preview',validate=None,desc=None)

```

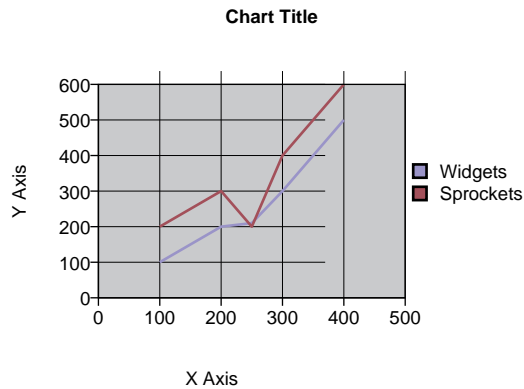

## simple\_pie

#Autogenerated by ReportLab guiedit do not edit

## Classes

### SimplePie(\_DrawingEditorMixin, Drawing)


#### Example

```

def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,Pie(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 100
    self.chart.height = 100
    self.chart.x = 25
    self.chart.y = 25
    self.chart.slices[0].fillColor = color01
    self.chart.slices[1].fillColor = color02
    self.chart.slices[2].fillColor = color03
    self.chart.slices[3].fillColor = color04
    self.chart.slices[4].fillColor = color05
    self.chart.slices[5].fillColor = color06
    self.chart.slices[6].fillColor = color07
    self.chart.slices[7].fillColor = color08
    self.chart.slices[8].fillColor = color09
    self.chart.slices[9].fillColor = color10
    self.chart.data = (100, 150, 180)
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'North'), (color02, 'South'),(color03, 'Central')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 160

```

```
self.Legend.y          = 85
self.Legend.dxTextSpace = 5
self.Legend.dy         = 5
self.Legend.dx         = 5
self.Legend.deltay     = 5
self.Legend.alignment   = 'right'
self.chart.slices.strokeWidth = 1
self.chart.slices.fontName = 'Helvetica'
self.background        = ShadedRect()
self.background.fillColorStart = backgroundGrey
self.background.fillColorEnd   = backgroundGrey
self.background.numShades     = 1
self.background.strokeWidth   = 0.5
self.background.x            = 25
self.background.y            = 25
self.Legend.columnMaximum = 10
self._add(self,0,name='preview',validate=None,desc=None)
```

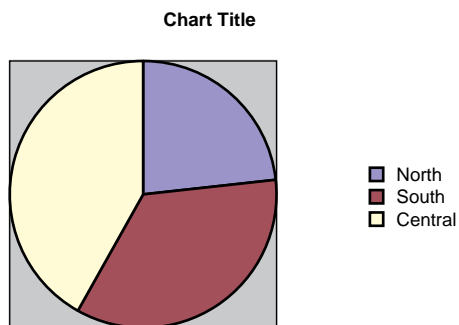

## clustered\_column

#Autogenerated by ReportLab guiedit do not edit

## Classes

### ClusteredColumn(\_DrawingEditorMixin, Drawing)


#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,VerticalBarChart(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.bars[0].fillColor = color01
    self.chart.bars[1].fillColor = color02
    self.chart.bars[2].fillColor = color03
    self.chart.bars[3].fillColor = color04
    self.chart.bars[4].fillColor = color05
    self.chart.bars[5].fillColor = color06
    self.chart.bars[6].fillColor = color07
    self.chart.bars[7].fillColor = color08
    self.chart.bars[8].fillColor = color09
    self.chart.bars[9].fillColor = color10
    self.chart.fillColor = backgroundGrey
    self.chart.barLabels.fontName = 'Helvetica'
    self.chart.valueAxis.labels.fontName = 'Helvetica'
    self.chart.valueAxis.labels.fontSize = 7
    self.chart.valueAxis.forceZero = 1
    self.chart.data = [(100, 150, 180), (125, 180, 200)]
```

```

self.chart.groupSpacing      = 15
self.chart.valueAxis.avoidBoundFrac      = 1
self.chart.valueAxis.gridEnd      = 115
self.chart.valueAxis.tickLeft      = 3
self.chart.valueAxis.visibleGrid      = 1
self.chart.categoryAxis.categoryNames      = ['North', 'South', 'Central']
self.chart.categoryAxis.tickDown      = 3
self.chart.categoryAxis.labels.fontName      = 'Helvetica'
self.chart.categoryAxis.labels.fontSize      = 7
self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
self.Title.fontName      = 'Helvetica-Bold'
self.Title.fontSize      = 7
self.Title.x      = 100
self.Title.y      = 135
self.Title._text      = 'Chart Title'
self.Title.maxWidth      = 180
self.Title.height      = 20
self.Title.textAnchor      = 'middle'
self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
self.Legend.colorNamePairs      = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName      = 'Helvetica'
self.Legend.fontSize      = 7
self.Legend.x      = 153
self.Legend.y      = 85
self.Legend.dxTextSpace      = 5
self.Legend.dy      = 5
self.Legend.dx      = 5
self.Legend.deltay      = 5
self.Legend.alignment      = 'right'
self._add(self,Label(),name='XLabel',validate=None,desc="The label on the horizontal axis")
self.XLabel.fontName      = 'Helvetica'
self.XLabel.fontSize      = 7
self.XLabel.x      = 85
self.XLabel.y      = 10
self.XLabel.textAnchor      = 'middle'
self.XLabel.maxWidth      = 100
self.XLabel.height      = 20
self.XLabel._text      = "X Axis"
self._add(self,Label(),name='YLabel',validate=None,desc="The label on the vertical axis")
self.YLabel.fontName      = 'Helvetica'
self.YLabel.fontSize      = 7
self.YLabel.x      = 12
self.YLabel.y      = 80
self.YLabel.angle      = 90
self.YLabel.textAnchor      = 'middle'
self.YLabel.maxWidth      = 100
self.YLabel.height      = 20
self.YLabel._text      = "Y Axis"
self._add(self,0,name='preview',validate=None,desc=None)

```

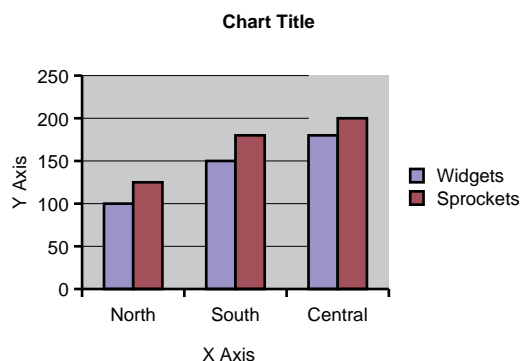

## radar


#Autogenerated by ReportLab guiedit do not edit

## Classes

### RadarChart(\_DrawingEditorMixin, Drawing)

#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,SpiderChart(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 90
    self.chart.height = 90
    self.chart.x = 45
    self.chart.y = 25
    self.chart.strands[0].strokeColor= color01
    self.chart.strands[1].strokeColor= color02
    self.chart.strands[2].strokeColor= color03
    self.chart.strands[3].strokeColor= color04
    self.chart.strands[4].strokeColor= color05
    self.chart.strands[5].strokeColor= color06
    self.chart.strands[6].strokeColor= color07
    self.chart.strands[7].strokeColor= color08
    self.chart.strands[8].strokeColor= color09
    self.chart.strands[9].strokeColor= color10
    self.chart.strands[0].fillColor = None
    self.chart.strands[1].fillColor = None
    self.chart.strands[2].fillColor = None
    self.chart.strands[3].fillColor = None
    self.chart.strands[4].fillColor = None
    self.chart.strands[5].fillColor = None
    self.chart.strands[6].fillColor = None
    self.chart.strands[7].fillColor = None
    self.chart.strands[8].fillColor = None
    self.chart.strands[9].fillColor = None
    self.chart.strands.strokeWidth = 1
    self.chart.strandLabels.fontName = 'Helvetica'
    self.chart.strandLabels.fontSize = 6
    self.chart.fillColor = backgroundGrey
    self.chart.data = [(125, 180, 200), (100, 150, 180)]
    self.chart.labels = ['North', 'South', 'Central']
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 153
    self.Legend.y = 85
    self.Legend.dxTextSpace = 5
    self.Legend.dy = 5
    self.Legend.dx = 5
    self.Legend.deltay = 5
    self.Legend.alignment = 'right'
    self.chart.strands.strokeWidth = 1
    self._add(self,0,name='preview',validate=None,desc=None)
```

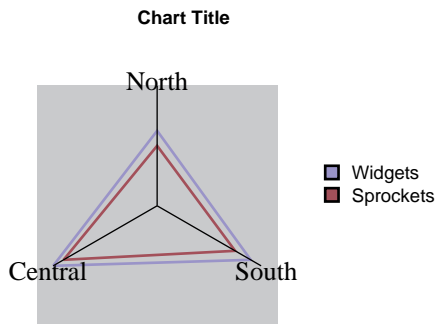

## clustered\_bar

#Autogenerated by ReportLab guiedit do not edit

## Classes

### ClusteredBar(\_DrawingEditorMixin, Drawing)

#### Example


```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,HorizontalBarChart(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.bars[0].fillColor = color01
    self.chart.bars[1].fillColor = color02
    self.chart.bars[2].fillColor = color03
    self.chart.bars[3].fillColor = color04
    self.chart.bars[4].fillColor = color05
    self.chart.bars[5].fillColor = color06
    self.chart.bars[6].fillColor = color07
    self.chart.bars[7].fillColor = color08
    self.chart.bars[8].fillColor = color09
    self.chart.bars[9].fillColor = color10
    self.chart.fillColor = backgroundGrey
    self.chart.barLabels.fontName = 'Helvetica'
    self.chart.valueAxis.labels.fontName = 'Helvetica'
    self.chart.valueAxis.labels.fontSize = 6
    self.chart.valueAxis.forceZero = 1
    self.chart.data = [(100, 150, 180), (125, 180, 200)]
    self.chart.groupSpacing = 15
    self.chart.valueAxis.avoidBoundFrac = 1
    self.chart.valueAxis.gridEnd = 80
    self.chart.valueAxis.tickDown = 3
    self.chart.valueAxis.visibleGrid = 1
    self.chart.categoryAxis.categoryNames = ['North', 'South', 'Central']
    self.chart.categoryAxis.tickLeft = 3
    self.chart.categoryAxis.labels.fontName = 'Helvetica'
    self.chart.categoryAxis.labels.fontSize = 6
    self.chart.categoryAxis.labels.dx = -3
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
```



```

self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName       = 'Helvetica'
self.Legend.fontSize       = 7
self.Legend.x               = 153
self.Legend.y               = 85
self.Legend.dxTextSpace    = 5
self.Legend.dy              = 5
self.Legend.dx              = 5
self.Legend.deltay         = 5
self.Legend.alignment      = 'right'
self._add(self,Label(),name='XLabel',validate=None,desc="The label on the horizontal axis")
self.XLabel.fontName       = 'Helvetica'
self.XLabel.fontSize       = 7
self.XLabel.x               = 85
self.XLabel.y               = 10
self.XLabel.textAnchor     = 'middle'
self.XLabel.maxWidth       = 100
self.XLabel.height         = 20
self.XLabel._text          = "X Axis"
self._add(self,Label(),name='YLabel',validate=None,desc="The label on the vertical axis")
self.YLabel.fontName       = 'Helvetica'
self.YLabel.fontSize       = 7
self.YLabel.x               = 12
self.YLabel.y               = 80
self.YLabel.angle           = 90
self.YLabel.textAnchor     = 'middle'
self.YLabel.maxWidth       = 100
self.YLabel.height         = 20
self.YLabel._text          = "Y Axis"
self._add(self,0,name='preview',validate=None,desc=None)

```

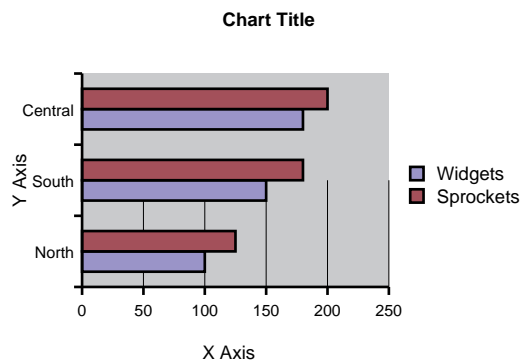

## stacked\_bar

#Autogenerated by ReportLab guiedit do not edit

## Classes

### StackedBar(\_DrawingEditorMixin, Drawing)


#### Example

```

def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,HorizontalBarChart(),name='chart',validate=None,desc="The main chart")
    self.chart.width       = 115
    self.chart.height      = 80
    self.chart.x            = 30
    self.chart.y            = 40
    self.chart.bars[0].fillColor = color01
    self.chart.bars[1].fillColor = color02
    self.chart.bars[2].fillColor = color03

```

```
self.chart.bars[3].fillColor = color04
self.chart.bars[4].fillColor = color05
self.chart.bars[5].fillColor = color06
self.chart.bars[6].fillColor = color07
self.chart.bars[7].fillColor = color08
self.chart.bars[8].fillColor = color09
self.chart.bars[9].fillColor = color10
self.chart.fillColor = backgroundGrey
self.chart.barLabels.fontName = 'Helvetica'
self.chart.valueAxis.labels.fontName = 'Helvetica'
self.chart.valueAxis.labels.fontSize = 6
self.chart.valueAxis.forceZero = 1
self.chart.data = [(100, 150, 180), (125, 180, 200)]
self.chart.groupSpacing = 15
self.chart.valueAxis.avoidBoundFrac = 1
self.chart.valueAxis.gridEnd = 80
self.chart.valueAxis.tickDown = 3
self.chart.valueAxis.visibleGrid = 1
self.chart.categoryAxis.categoryNames = ['North', 'South', 'Central']
self.chart.categoryAxis.tickLeft = 3
self.chart.categoryAxis.labels.fontName = 'Helvetica'
self.chart.categoryAxis.labels.fontSize = 6
self.chart.categoryAxis.labels.dx = -3
self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
self.Title.fontName = 'Helvetica-Bold'
self.Title.fontSize = 7
self.Title.x = 100
self.Title.y = 135
self.Title._text = 'Chart Title'
self.Title.maxWidth = 180
self.Title.height = 20
self.Title.textAnchor = 'middle'
self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName = 'Helvetica'
self.Legend.fontSize = 7
self.Legend.x = 153
self.Legend.y = 85
self.Legend.dxTextSpace = 5
self.Legend.dy = 5
self.Legend.dx = 5
self.Legend.deltay = 5
self.Legend.alignment = 'right'
self._add(self,Label(),name='XLabel',validate=None,desc="The label on the horizontal axis")
self.XLabel.fontName = 'Helvetica'
self.XLabel.fontSize = 7
self.XLabel.x = 85
self.XLabel.y = 10
self.XLabel.textAnchor = 'middle'
self.XLabel.maxWidth = 100
self.XLabel.height = 20
self.XLabel._text = "X Axis"
self._add(self,Label(),name='YLabel',validate=None,desc="The label on the vertical axis")
self.YLabel.fontName = 'Helvetica'
self.YLabel.fontSize = 7
self.YLabel.x = 12
self.YLabel.y = 80
self.YLabel.angle = 90
self.YLabel.textAnchor = 'middle'
self.YLabel.maxWidth = 100
self.YLabel.height = 20
self.YLabel._text = "Y Axis"
self.chart.categoryAxis.style='stacked'
self._add(self,0,name='preview',validate=None,desc=None)
```

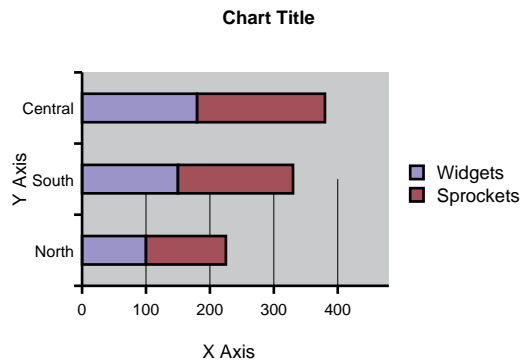

## filled\_radar


#Autogenerated by ReportLab guiedit do not edit

## Classes

### FilledRadarChart(\_DrawingEditorMixin, Drawing)

#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,SpiderChart(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 90
    self.chart.height = 90
    self.chart.x = 45
    self.chart.y = 25
    self.chart.strands[0].fillColor = color01
    self.chart.strands[1].fillColor = color02
    self.chart.strands[2].fillColor = color03
    self.chart.strands[3].fillColor = color04
    self.chart.strands[4].fillColor = color05
    self.chart.strands[5].fillColor = color06
    self.chart.strands[6].fillColor = color07
    self.chart.strands[7].fillColor = color08
    self.chart.strands[8].fillColor = color09
    self.chart.strands[9].fillColor = color10
    self.chart.strandLabels.fontName = 'Helvetica'
    self.chart.strandLabels.fontSize = 6
    self.chart.fillColor = backgroundGrey
    self.chart.data = [(125, 180, 200), (100, 150, 180)]
    self.chart.labels = ['North', 'South', 'Central']
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
    self.Title.textAnchor = 'middle'
    self._add(self,Legend(),name='Legend',validate=None,desc="The legend or key for the chart")
    self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
    self.Legend.fontName = 'Helvetica'
    self.Legend.fontSize = 7
    self.Legend.x = 153
    self.Legend.y = 85
    self.Legend.dxTextSpace = 5
    self.Legend.dy = 5
    self.Legend.dx = 5
    self.Legend.deltay = 5
    self.Legend.alignment = 'right'
    self._add(self,0,name='preview',validate=None,desc=None)
```

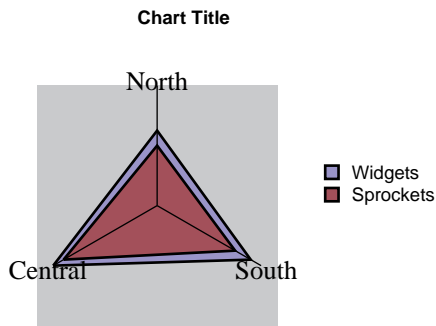

## stacked\_column

#Autogenerated by ReportLab guiedit do not edit

## Classes

### StackedColumn(\_DrawingEditorMixin, Drawing)


#### Example

```
def __init__(self,width=200,height=150,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    self._add(self,VerticalBarChart(),name='chart',validate=None,desc="The main chart")
    self.chart.width = 115
    self.chart.height = 80
    self.chart.x = 30
    self.chart.y = 40
    self.chart.bars[0].fillColor = color01
    self.chart.bars[1].fillColor = color02
    self.chart.bars[2].fillColor = color03
    self.chart.bars[3].fillColor = color04
    self.chart.bars[4].fillColor = color05
    self.chart.bars[5].fillColor = color06
    self.chart.bars[6].fillColor = color07
    self.chart.bars[7].fillColor = color08
    self.chart.bars[8].fillColor = color09
    self.chart.bars[9].fillColor = color10
    self.chart.fillColor = backgroundGrey
    self.chart.barLabels.fontName = 'Helvetica'
    self.chart.valueAxis.labels.fontName = 'Helvetica'
    self.chart.valueAxis.labels.fontSize = 7
    self.chart.valueAxis.forceZero = 1
    self.chart.data = [(100, 150, 180), (125, 180, 200)]
    self.chart.groupSpacing = 15
    self.chart.valueAxis.avoidBoundFrac = 1
    self.chart.valueAxis.gridEnd = 115
    self.chart.valueAxis.tickLeft = 3
    self.chart.valueAxis.visibleGrid = 1
    self.chart.categoryAxis.categoryNames = ['North', 'South', 'Central']
    self.chart.categoryAxis.tickDown = 3
    self.chart.categoryAxis.labels.fontName = 'Helvetica'
    self.chart.categoryAxis.labels.fontSize = 7
    self._add(self,Label(),name='Title',validate=None,desc="The title at the top of the chart")
    self.Title.fontName = 'Helvetica-Bold'
    self.Title.fontSize = 7
    self.Title.x = 100
    self.Title.y = 135
    self.Title._text = 'Chart Title'
    self.Title.maxWidth = 180
    self.Title.height = 20
```

```

self.Title.textAnchor = 'middle'
self._add(self, Legend(), name='Legend', validate=None, desc="The legend or key for the chart")
self.Legend.colorNamePairs = [(color01, 'Widgets'), (color02, 'Sprockets')]
self.Legend.fontName = 'Helvetica'
self.Legend.fontSize = 7
self.Legend.x = 153
self.Legend.y = 85
self.Legend.dxTextSpace = 5
self.Legend.dy = 5
self.Legend.dx = 5
self.Legend.deltay = 5
self.Legend.alignment = 'right'
self._add(self, Label(), name='XLabel', validate=None, desc="The label on the horizontal axis")
self.XLabel.fontName = 'Helvetica'
self.XLabel.fontSize = 7
self.XLabel.x = 85
self.XLabel.y = 10
self.XLabel.textAnchor = 'middle'
self.XLabel.maxWidth = 100
self.XLabel.height = 20
self.XLabel._text = "X Axis"
self._add(self, Label(), name='YLabel', validate=None, desc="The label on the vertical axis")
self.YLabel.fontName = 'Helvetica'
self.YLabel.fontSize = 7
self.YLabel.x = 12
self.YLabel.y = 80
self.YLabel.angle = 90
self.YLabel.textAnchor = 'middle'
self.YLabel.maxWidth = 100
self.YLabel.height = 20
self.YLabel._text = "Y Axis"
self.chart.categoryAxis.style = 'stacked'
self._add(self, 0, name='preview', validate=None, desc=None)

```

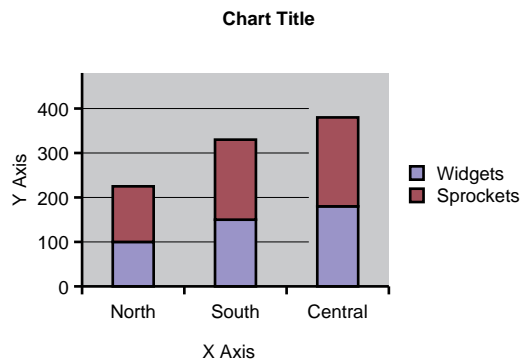

## signsandsymbols

This file is a collection of widgets to produce some common signs and symbols.

Widgets include:

- ETriangle (an equilateral triangle),
- RTriangle (a right angled triangle),
- Octagon,
- Crossbox,
- Tickbox,
- SmileyFace,
- StopSign,
- NoEntry,
- NotAllowed (the red roundel from 'no smoking' signs),
- NoSmoking,

- DangerSign (a black exclamation point in a yellow triangle),
- YesNo (returns a tickbox or a crossbox depending on a testvalue),
- FloppyDisk,
- ArrowOne, and
- ArrowTwo

## Classes

### **ArrowOne ( \_Symbol )**

This widget draws an arrow (style one).

possible attributes:  
'x', 'y', 'size', 'fillColor'

### **Public Attributes**

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### **ArrowTwo ( ArrowOne )**

This widget draws an arrow (style two).

possible attributes:  
'x', 'y', 'size', 'fillColor'

### **Public Attributes**

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### **Crossbox ( \_Symbol )**

This draws a black box with a red cross in it - a 'checkbox'.

possible attributes:

'x', 'y', 'size', 'crossColor', 'strokeColor', 'crosswidth'

## Public Attributes

**crossColor** None

**crosswidth** None

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## DangerSign(\_Symbol)

This draws a 'danger' sign: a yellow box with a black exclamation point.

possible attributes:

'x', 'y', 'size', 'strokeColor', 'fillColor', 'strokeWidth'

## Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## ETriangle(\_Symbol)

This draws an equilateral triangle.

## Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### **FloppyDisk(\_Symbol)**

This widget draws an icon of a floppy disk.

possible attributes:

'x', 'y', 'size', 'diskcolor'

### **Public Attributes**

**diskColor** None

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### **NoEntry(\_Symbol)**

This draws a (British) No Entry sign - a red circle with a white line on it.

possible attributes:

'x', 'y', 'size'

### **Public Attributes**

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**innerBarColor** color of the inner bar

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### **NoSmoking(NotAllowed)**

This draws a no-smoking sign.



possible attributes:  
'x', 'y', 'size'

### Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### NotAllowed( \_Symbol )

This draws a 'forbidden' roundel (as used in the no-smoking sign).

possible attributes:  
'x', 'y', 'size'

### Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

### Octagon( \_Symbol )

This widget draws an Octagon.

possible attributes:  
'x', 'y', 'size', 'fillColor', 'strokeColor'

### Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## **RTriangle(\_Symbol)**

This draws a right-angled triangle.

possible attributes:

'x', 'y', 'size', 'fillColor', 'strokeColor'

## **Public Attributes**

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## **SmileyFace(\_Symbol)**

This draws a classic smiley face.

possible attributes:

'x', 'y', 'size', 'fillColor'

## **Public Attributes**

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## **StopSign(\_Symbol)**

This draws a (British) stop sign.

possible attributes:

'x', 'y', 'size'

## Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**stopColor** color of the word stop

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## Tickbox( \_Symbol )

This draws a black box with a red tick in it - another 'checkbox'.

possible attributes:

'x', 'y', 'size', 'tickColor', 'strokeColor', 'tickwidth'

## Public Attributes

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**tickColor** None

**tickwidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## YesNo( \_Symbol )

This widget draw a tickbox or crossbox depending on 'testValue'.

If this widget is supplied with a 'True' or 1 as a value for testValue, it will use the tickbox widget. Otherwise, it will produce a crossbox.

possible attributes:

'x', 'y', 'size', 'tickcolor', 'crosscolor', 'testValue'

## Public Attributes

**crosscolor** None

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**testValue** None

**tickcolor** None

**x** symbol x coordinate

**y** symbol y coordinate

## **`_Symbol(Widget)`**

Abstract base widget

possible attributes:

'x', 'y', 'size', 'fillColor', 'strokeColor'

## **Public Attributes**

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## **grids**

#Copyright ReportLab Europe Ltd. 2000-2004

#see license.txt for license details

#history <http://www.reportlab.co.uk/cgi-bin/viewcvs.cgi/public/reportlab/trunk/reportlab/graphics/widgets/grids.py>

## **Classes**

### **`DoubleGrid(Widget)`**

This combines two ordinary Grid objects orthogonal to each other.

## **Public Attributes**

**grid0** The first grid component.

**grid1** The second grid component.

**height** The grid's height.


**width** The grid's width.

**x** The grid's lower-left x position.

**y** The grid's lower-left y position.

#### *Example*

```
def demo(self):
    D = Drawing(100, 100)
    g = DoubleGrid()
    D.add(g)
    return D
```



#### *Properties of Example Widget*

```
grid0.delta = 20
grid0.delta0 = 0
grid0.deltaSteps = []
grid0.fillColor = Color(1,1,1,1)
grid0.height = 100
grid0.orientation = 'vertical'
grid0.stripeColors = [Color(1,0,0,1), Color(0,.501961,0,1), Color(0,0,1,1)]
grid0.strokeColor = Color(0,0,0,1)
grid0.strokeWidth = 1
grid0.useLines = 1
grid0.useRects = 0
grid0.width = 100
grid0.x = 0
grid0.y = 0
grid1.delta = 20
grid1.delta0 = 0
grid1.deltaSteps = []
grid1.fillColor = Color(1,1,1,1)
grid1.height = 100
grid1.orientation = 'horizontal'
grid1.stripeColors = [Color(1,0,0,1), Color(0,.501961,0,1), Color(0,0,1,1)]
grid1.strokeColor = Color(0,0,0,1)
grid1.strokeWidth = 1
grid1.useLines = 1
grid1.useRects = 0
grid1.width = 100
grid1.x = 0
grid1.y = 0
height = 100
width = 100
x = 0
y = 0
```

## Grid(Widget)

This makes a rectangular grid of equidistant stripes.

The grid contains an outer border rectangle, and stripes inside which can be drawn with lines and/or as solid tiles. The drawing order is: outer rectangle, then lines and tiles.

The stripes' width is indicated as 'delta'. The sequence of stripes can have an offset named 'delta0'. Both values need to be positive!

## Public Attributes

**delta** Determines the width/height of the stripes.

**delta0** Determines the stripes initial width/height offset.

**deltaSteps** List of deltas to be used cyclically.

**fillColor** Background color for entire rectangle.

**height** The grid's height.

**orientation** Determines if stripes are vertical or horizontal.

**rectStrokeColor** Color for outer rect stroke.

**rectStrokeWidth** Width for outer rect stroke.

**stripeColors** Colors applied cyclically in the right or upper direction.

**strokeColor** Color used for lines.

**strokeWidth** Width used for lines.

**useLines** Determines if stripes are drawn with lines.

**useRects** Determines if stripes are drawn with solid rectangles.

**width** The grid's width.

**x** The grid's lower-left x position.

**y** The grid's lower-left y position.

### Example

```
def demo(self):
    D = Drawing(100, 100)

    g = Grid()
    D.add(g)

    return D
```

### Properties of Example Widget

```
delta = 20
delta0 = 0
deltaSteps = []
fillColor = Color(1,1,1,1)
height = 100
orientation = 'vertical'
stripeColors = [Color(1,0,0,1), Color(0,.501961,0,1), Color(0,0,1,1)]
strokeColor = Color(0,0,0,1)
strokeWidth = 2
useLines = 0
```

```
useRects = 1
width = 100
x = 0
y = 0
```

## ShadedPolygon(Widget, LineShape)

### Public Attributes

**angle** Shading angle

**cylinderMode** True if shading reverses in middle.

**fillColorEnd** None

**fillColorStart** None

**numShades** The number of interpolating colors.

**overprintMask** overprinting for ordinary CMYK

**points** None

**strokeColor** None

**strokeDashArray** a sequence of numbers represents on and off, e.g. (2,1)

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeOpacity** The level of transparency of the line, any real number between 0 and 1

**strokeOverprint** Turn on stroke overprinting

**strokeWidth** None

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
angle = 90
cylinderMode = 0
fillColorEnd = Color(0,.501961,0,1)
fillColorStart = Color(1,0,0,1)
numShades = 50
points = [-1, -1, 2, 2, 3, -1]
strokeColor = Color(0,0,0,1)
strokeDashArray = None
strokeLineCap = 0
strokeLineJoin = 0
strokeMiterLimit = 0
strokeOpacity = None
strokeWidth = 1
```



## ShadedRect(Widget)

This makes a rectangle with shaded colors between two colors.

Colors are interpolated linearly between 'fillColorStart' and 'fillColorEnd', both of which appear at the margins. If 'numShades' is set to one, though, only 'fillColorStart' is used.


### Public Attributes

- cylinderMode** True if shading reverses in middle.
- fillColorEnd** End value of the color shade.
- fillColorStart** Start value of the color shade.
- height** The grid's height.
- numShades** The number of interpolating colors.
- orientation** Determines if stripes are vertical or horizontal.
- strokeColor** Color used for border line.
- strokeWidth** Width used for lines.
- width** The grid's width.
- x** The grid's lower-left x position.
- y** The grid's lower-left y position.

### Example

```
def demo(self):
    D = Drawing(100, 100)
    g = ShadedRect()
    D.add(g)

    return D
```



### Properties of Example Widget

```
cylinderMode = 0
fillColorEnd = Color(0,0,0,1)
fillColorStart = Color(1,.752941,.796078,1)
height = 100
numShades = 20
orientation = 'vertical'
strokeColor = Color(0,0,0,1)
strokeWidth = 2
width = 100
x = 0
y = 0
```

## **eventcal**

This file is a

## **Classes**

### **EventCalendar (Widget)**

### **Public Attributes**

#### *Example*

```
def demo(self):  
    msg = "demo() must be implemented for each Widget!"  
    raise shapes.NotImplementedError, msg
```

#### *Properties of Example Widget*

```
data = []  
day = 0  
endTime = None  
height = 150  
startTime = None  
timeColWidth = None  
trackNames = None  
trackRowHeight = 20  
width = 300  
x = 0  
y = 0
```

## table

#Copyright ReportLab Europe Ltd. 2000-2004

#see license.txt for license details

#history <http://www.reportlab.co.uk/cgi-bin/viewcvs.cgi/public/reportlab/trunk/reportlab/graphics/widgets/grids.py>

## Classes

### TableWidget (Widget)

A two dimensions table of labels

### Public Attributes

**alignment** Alignment of text within cells

**borderStrokeColor** table border color

**borderStrokeWidth** border line width

**boxAnchor** location of the table anchoring point

**data** a list of list of strings to be displayed in the cells

**dividerDashArray** Dash array for dividerLines.

**fillColor** table fill color

**fontColor** font color

**fontName** text font in the table

**fontSize** font size of the table

**height** table height

**horizontalDividerStrokeColor** table inner horizontal lines color

**horizontalDividerStrokeWidth** table inner horizontal lines width

**textAnchor** Alignment of text within cells

**verticalDividerStrokeColor** table inner vertical lines color

**verticalDividerStrokeWidth** table inner vertical lines width

**width** table width

**x** x position of left edge of table

**y** y position of bottom edge of table

### Example

```
def demo(self):
    """ returns a sample of this widget with data
    """
    d = Drawing(400, 200)
    t = TableWidget()
    d.add(t, name='table')
    d.table.dividerDashArray = (1, 3, 2)
    d.table.verticalDividerStrokeColor = None
    d.table.borderStrokeWidth = 0
    d.table.borderStrokeColor = colors.red
    return d
```

*Properties of Example Widget*

```
alignment = 'right'
borderStrokeColor = Color(0,0,0,1)
borderStrokeWidth = 0.5
boxAnchor = 'nw'
data = [['North', 'South', 'East', 'West'],
        [100, 110, 120, 130],
        ['A', 'B', 'C', 'D']]
dividerDashArray = None
fillColor = None
fontColor = Color(0,0,0,1)
fontSize = 8
height = 100
horizontalDividerStrokeColor = Color(0,0,0,1)
horizontalDividerStrokeWidth = 0.5
textAnchor = 'start'
verticalDividerStrokeColor = Color(0,0,0,1)
verticalDividerStrokeWidth = 0.25
width = 200
x = 10
y = 10
```

## markers

This modules defines a collection of markers used in charts.

## Classes

### Marker (Widget )

A polymorphic class of markers

### Public Attributes

**angle** marker rotation

**arrowBarbDx** arrow only the delta x for the barbs

**arrowHeight** arrow only height

**dx** marker x coordinate adjustment

**dy** marker y coordinate adjustment

**fillColor** marker fill colour

**kind** marker type name

**size** marker size

**strokeColor** marker stroke colour

**strokeWidth** marker stroke width

**x** marker x coordinate

**y** marker y coordinate

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
angle = 0
arrowBarbDx = -1.25
arrowHeight = 1.875
dx = 0
dy = 0
fillColor = None
kind = None
size = 5
strokeColor = Color(0,0,0,1)
strokeWidth = 0.1
x = 0
y = 0
```

## flags

This file is a collection of flag graphics as widgets.

All flags are represented at the ratio of 1:2, even where the official ratio for the flag is something else (such as 3:5 for the German national flag). The only exceptions are for where this would look *\_very\_* wrong, such as the Danish flag whose (ratio is 28:37), or the Swiss flag (which is square).

Unless otherwise stated, these flags are all the 'national flags' of the countries, rather than their state flags, naval flags, ensigns or any other variants. (National flags are the flag flown by civilians of a country and the ones usually used to represent a country abroad. State flags are the variants used by the government and by diplomatic missions overseas).

To check on how close these are to the 'official' representations of flags, check the World Flag Database at <http://www.flags.ndirect.co.uk/>

The flags this file contains are:

EU Members:

United Kingdom, Austria, Belgium, Denmark, Finland, France, Germany, Greece, Ireland, Italy, Luxembourg, Holland (The Netherlands), Spain, Sweden

Others:

USA, Czech Republic, European Union, Switzerland, Turkey, Brazil

(Brazilian flag contributed by Publio da Costa Melo [publio@planetarium.com.br]).

## Classes

### Flag(\_Symbol)

This is a generic flag class that all the flags in this file use as a basis.

This class basically provides edges and a tidy-up routine to hide any bits of line that overlap the 'outside' of the flag

possible attributes:

'x', 'y', 'size', 'fillColor'

### Public Attributes

**border** Whether a background is drawn

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** Background color

**kind** Which flag

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## **Star(\_Symbol)**

This draws a 5-pointed star.

possible attributes:

'x', 'y', 'size', 'fillColor', 'strokeColor'

## **Public Attributes**

**angle** angle in degrees

**dx** symbol x coordinate adjustment

**dy** symbol x coordinate adjustment

**fillColor** None

**size** None

**strokeColor** None

**strokeWidth** None

**x** symbol x coordinate

**y** symbol y coordinate

## **barcharts**

This module defines a variety of Bar Chart components.

The basic flavors are stacked and side-by-side, available in horizontal and vertical versions.

## **Classes**

### **BarChart(PlotArea)**

Abstract base class, unusable by itself.

## **Public Attributes**

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**barLabelArray** explicit array of bar label values, must match size of data if present.

**barLabelCallOut** Callout function(label) label.\_callOutInfo = (self,g,rowNo,colNo,x,y,width,height,x00,y00,x0,y0)

**barLabelFormat** Formatting string or function used for bar labels.

**barLabels** Handle to the list of bar labels.

**barRecord** callable(bar,label=labelText,value=value,\*\*kwds) to record bar information

**barSpacing** Width between individual bars.

**barWidth** The width of an individual bar.

**bars** Handle of the individual bars.

**categoryAxis** Handle of the category axis.

**categoryLabelBarOrder** where any label bar should appear first/last

**categoryLabelBarSize** width to leave for a category label to go between categories.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** Width between groups of bars.

**height** Height of the chart.

**naLabel** Label to use for N/A values.

**reversePlotOrder** If true, reverse common category plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**useAbsolute** Flag to use absolute spacing values; use string of gsb for finer control (g=groupSpacing,s=barSpacing,b=barWidth).

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

## **BarChart3D( BarChart )**

### **Public Attributes**

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**barLabelArray** explicit array of bar label values, must match size of data if present.

**barLabelCallOut** Callout function(label) label.\_callOutInfo = (self,g,rowNo,colNo,x,y,width,height,x00,y00,x0,y0)

**barLabelFormat** Formatting string or function used for bar labels.

**barLabels** Handle to the list of bar labels.

**barRecord** callable(bar,label=labelText,value=value,\*\*kwds) to record bar information

**barSpacing** Width between individual bars.

**barWidth** The width of an individual bar.

**bars** Handle of the individual bars.

**categoryAxis** Handle of the category axis.

**categoryLabelBarOrder** where any label bar should appear first/last

**categoryLabelBarSize** width to leave for a category label to go between categories.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** Width between groups of bars.

**height** Height of the chart.



**naLabel** Label to use for N/A values.

**reversePlotOrder** If true, reverse common category plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**theta\_x**  $dx/dz$

**theta\_y**  $dy/dz$

**useAbsolute** Flag to use absolute spacing values; use string of gsb for finer control (g=groupSpacing,s=barSpacing,b=barWidth).

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

**zDepth** depth of an individual series

**zSpace** z gap around series

## **HorizontalBarChart (BarChart)**

Horizontal bar chart with multiple side-by-side bars.

### **Public Attributes**

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**barLabelArray** explicit array of bar label values, must match size of data if present.

**barLabelCallOut** Callout function(label) label.\_callOutInfo = (self,g,rowNo,colNo,x,y,width,height,x00,y00,x0,y0)

**barLabelFormat** Formatting string or function used for bar labels.

**barLabels** Handle to the list of bar labels.

**barRecord** callable(bar,label=labelText,value=value,\*\*kwds) to record bar information

**barSpacing** Width between individual bars.

**barWidth** The width of an individual bar.

**bars** Handle of the individual bars.

**categoryAxis** Handle of the category axis.

**categoryLabelBarOrder** where any label bar should appear first/last

**categoryLabelBarSize** width to leave for a category label to go between categories.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** Width between groups of bars.

**height** Height of the chart.

**naLabel** Label to use for N/A values.

**reversePlotOrder** If true, reverse common category plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**useAbsolute** Flag to use absolute spacing values; use string of gsb for finer control (g=groupSpacing,s=barSpacing,b=barWidth).

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

### *Example*

```
def demo(self):
    """Shows basic use of a bar chart"""
    if self.__class__.__name__=='BarChart':
        raise NotImplementedError, 'Abstract Class BarChart has no demo'
    drawing = Drawing(200, 100)
    bc = self.__class__()
    drawing.add(bc)
    return drawing
```

### *Properties of Example Widget*

```
background = None
barLabelArray = None
barLabelFormat = None
barLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13e2698>
barSpacing = 0
barWidth = 10
bars = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13e26e8>
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13e25d0>
categoryAxis.loLLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
categoryAxis.style = 'parallel'
categoryAxis.tickLeft = 5
categoryAxis.tickRight = 0
categoryAxis.tickShift = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
data = [(100, 110, 120, 130), (70, 80, 85, 90)]
```

```
debug = 0
fillColor = None
groupSpacing = 5
height = 85
naLabel = None
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLLen = 0
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13e2648>
valueAxis.loLLen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickDown = 5
valueAxis.tickUp = 0
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## **HorizontalBarChart3D(BarChart3D, HorizontalBarChart)**

### **Public Attributes**

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**barLabelArray** explicit array of bar label values, must match size of data if present.

**barLabelCallOut** Callout function(label) label.\_callOutInfo =  
(self,g,rowNo,colNo,x,y,width,height,x00,y00,x0,y0)

**barLabelFormat** Formatting string or function used for bar labels.

**barLabels** Handle to the list of bar labels.

**barRecord** callable(bar,label=labelText,value=value,\*\*kwds) to record bar information

**barSpacing** Width between individual bars.

**barWidth** The width of an individual bar.

**bars** Handle of the individual bars.

**categoryAxis** Handle of the category axis.

**categoryLabelBarOrder** where any label bar should appear first/last

**categoryLabelBarSize** width to leave for a category label to go between categories.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** Width between groups of bars.

**height** Height of the chart.

**naLabel** Label to use for N/A values.

**reversePlotOrder** If true, reverse common category plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**theta\_x** dx/dz

**theta\_y** dy/dz

**useAbsolute** Flag to use absolute spacing values; use string of gsb for finer control  
(g=groupSpacing,s=barSpacing,b=barWidth).

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

**zDepth** depth of an individual series

**zSpace** z gap around series

### *Example*

```
def demo(self):
```

```
"""Shows basic use of a bar chart"""
if self.__class__.__name__=='BarChart':
    raise NotImplementedError, 'Abstract Class BarChart has no demo'
drawing = Drawing(200, 100)
bc = self.__class__()
drawing.add(bc)
return drawing
```

### *Properties of Example Widget*

```
background = None
barLabelArray = None
barLabelFormat = None
barLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13ef1e8>
barSpacing = 0
barWidth = 10
bars = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13ef238>
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13ef120>
categoryAxis.loLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
categoryAxis.style = 'parallel'
categoryAxis.tickLeft = 5
categoryAxis.tickRight = 0
categoryAxis.tickShift = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
data = [(100, 110, 120, 130), (70, 80, 85, 90)]
debug = 0
fillColor = None
groupSpacing = 5
height = 85
naLabel = None
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLen = 0
```

```
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13ef198>
valueAxis.loLlen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickDown = 5
valueAxis.tickUp = 0
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## SampleH5c4 (Drawing)

Simple bar chart with absolute spacing.

### Example


```
def __init__(self,width=400,height=200,*args,**kw):
    Drawing.__init__(self,width,height,*args,**kw)
    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = dataSample5
    bc.strokeColor = colors.black

    bc.useAbsolute = 1
    bc.barWidth = 10
    bc.groupSpacing = 20
    bc.barSpacing = 10

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    self.add(bc,name='HBC')
```

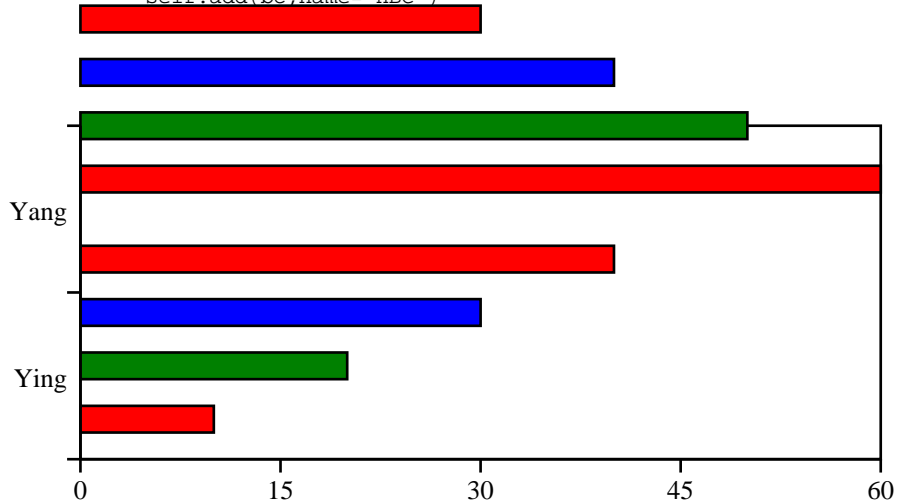

## VerticalBarChart (BarChart)

Vertical bar chart with multiple side-by-side bars.

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**barLabelArray** explicit array of bar label values, must match size of data if present.

**barLabelCallOut** Callout function(label) label.\_callOutInfo = (self,g,rowNo,colNo,x,y,width,height,x0,y0,x0,y0)

**barLabelFormat** Formatting string or function used for bar labels.

**barLabels** Handle to the list of bar labels.

**barRecord** callable(bar,label=labelText,value=value,\*\*kwds) to record bar information

**barSpacing** Width between individual bars.

**barWidth** The width of an individual bar.

**bars** Handle of the individual bars.

**categoryAxis** Handle of the category axis.

**categoryLabelBarOrder** where any label bar should appear first/last

**categoryLabelBarSize** width to leave for a category label to go between categories.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** Width between groups of bars.

**height** Height of the chart.

**naLabel** Label to use for N/A values.

**reversePlotOrder** If true, reverse common category plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**useAbsolute** Flag to use absolute spacing values; use string of gsb for finer control (g=groupSpacing,s=barSpacing,b=barWidth).

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

#### *Example*

```
def demo(self):
    """Shows basic use of a bar chart"""
    if self.__class__.__name__=='BarChart':
        raise NotImplementedError, 'Abstract Class BarChart has no demo'
    drawing = Drawing(200, 100)
    bc = self.__class__()
    drawing.add(bc)
    return drawing
```

#### *Properties of Example Widget*

```
background = None
barLabelArray = None
barLabelFormat = None
barLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1424170>
barSpacing = 0
barWidth = 10
bars = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x14241c0>
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
```



```
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x14240a8>
categoryAxis.loLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
categoryAxis.style = 'parallel'
categoryAxis.tickDown = 5
categoryAxis.tickShift = 0
categoryAxis.tickUp = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
data = [(100, 110, 120, 130), (70, 80, 85, 90)]
debug = 0
fillColor = None
groupSpacing = 5
height = 85
naLabel = None
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLen = 0
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1424120>
valueAxis.loLen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
```

```
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickLeft = 5
valueAxis.tickRight = 0
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## VerticalBarChart3D(BarChart3D, VerticalBarChart)

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**barLabelArray** explicit array of bar label values, must match size of data if present.

**barLabelCallOut** Callout function(label) label.\_callOutInfo = (self,g,rowNo,colNo,x,y,width,height,x00,y00,x0,y0)

**barLabelFormat** Formatting string or function used for bar labels.

**barLabels** Handle to the list of bar labels.

**barRecord** callable(bar,label=labelText,value=value,\*\*kwds) to record bar information

**barSpacing** Width between individual bars.

**barWidth** The width of an individual bar.

**bars** Handle of the individual bars.

**categoryAxis** Handle of the category axis.

**categoryLabelBarOrder** where any label bar should appear first/last

**categoryLabelBarSize** width to leave for a category label to go between categories.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** Width between groups of bars.

**height** Height of the chart.

**naLabel** Label to use for N/A values.

**reversePlotOrder** If true, reverse common category plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**theta\_x** dx/dz

**theta\_y** dy/dz

**useAbsolute** Flag to use absolute spacing values; use string of gsb for finer control (g=groupSpacing,s=barSpacing,b=barWidth).

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

**zDepth** depth of an individual series

**zSpace** z gap around series

### Example

```
def demo(self):
    """Shows basic use of a bar chart"""
    if self.__class__.__name__=='BarChart':
```

```
        raise NotImplementedError, 'Abstract Class BarChart has no demo'
    drawing = Drawing(200, 100)
    bc = self.__class__()
    drawing.add(bc)
    return drawing
```

### *Properties of Example Widget*

```
background = None
barLabelArray = None
barLabelFormat = None
barLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1428c88>
barSpacing = 0
barWidth = 10
bars = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1428cd8>
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1428bc0>
categoryAxis.loLLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
categoryAxis.style = 'parallel'
categoryAxis.tickDown = 5
categoryAxis.tickShift = 0
categoryAxis.tickUp = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
data = [(100, 110, 120, 130), (70, 80, 85, 90)]
debug = 0
fillColor = None
groupSpacing = 5
height = 85
naLabel = None
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLLen = 0
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
```

```
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1428c38>
valueAxis.loLlen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickLeft = 5
valueAxis.tickRight = 0
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## Functions

### `sampleH0a( ... )`

Make a slightly pathologic bar chart with only TWO data items.

#### *Example*

```
def sampleH0a():
    "Make a slightly pathologic bar chart with only TWO data items."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'se'
    bc.categoryAxis.labels.angle = 30
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

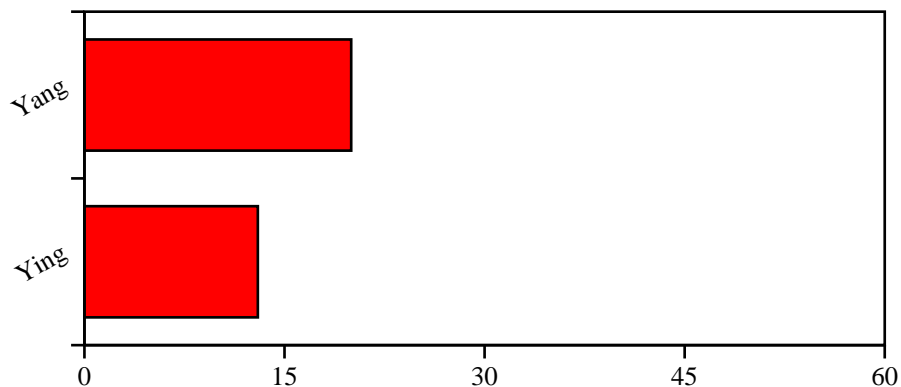

**sampleH0b( ... )**

Make a pathologic bar chart with only ONE data item.

*Example*

```
def sampleH0b():
    "Make a pathologic bar chart with only ONE data item."

    drawing = Drawing(400, 200)

    data = [(42,)]


    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 50
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'se'
    bc.categoryAxis.labels.angle = 30
    bc.categoryAxis.categoryNames = ['Jan-99']

    drawing.add(bc)

    return drawing
```

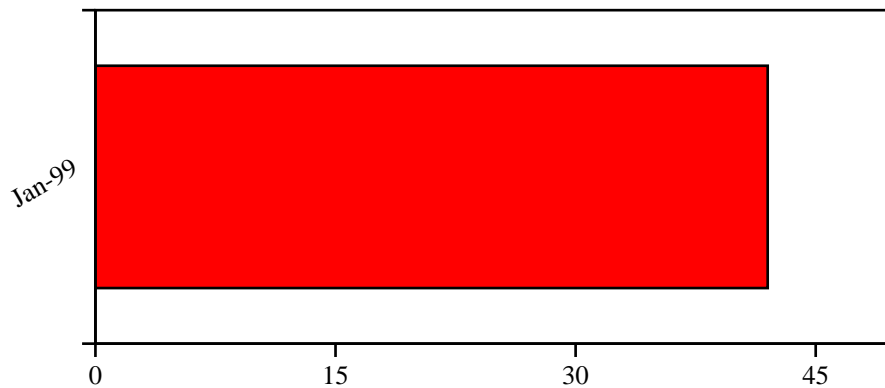

**sampleH0c( ... )**

Make a really pathologic bar chart with NO data items at all!

*Example*

```
def sampleH0c():
    "Make a really pathologic bar chart with NO data items at all!"

    drawing = Drawing(400, 200)

    data = [()]


    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'se'
    bc.categoryAxis.labels.angle = 30
    bc.categoryAxis.categoryNames = []

    drawing.add(bc)

    return drawing
```

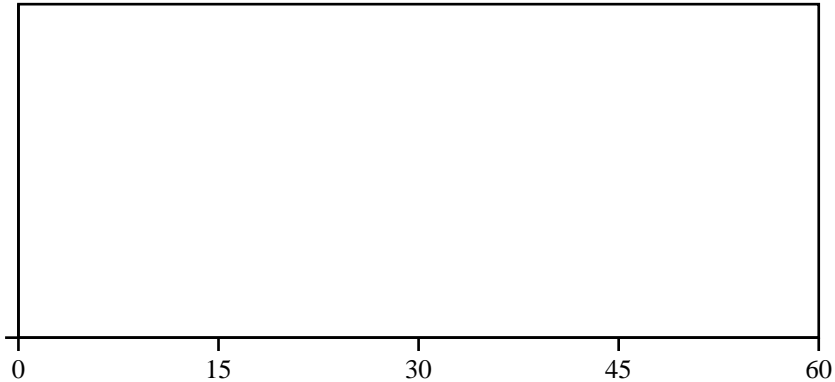



**sampleH1( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleH1():
    "Sample of multi-series bar chart."

    drawing = Drawing(400, 200)


    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (14, 6, 21, 23, 38, 46, 20, 5)
    ]

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    catNames = 'Jan Feb Mar Apr May Jun Jul Aug'.split(' ')
    catNames = map(lambda n:n+'-99', catNames)
    bc.categoryAxis.categoryNames = catNames
    drawing.add(bc, 'barchart')

    return drawing
```

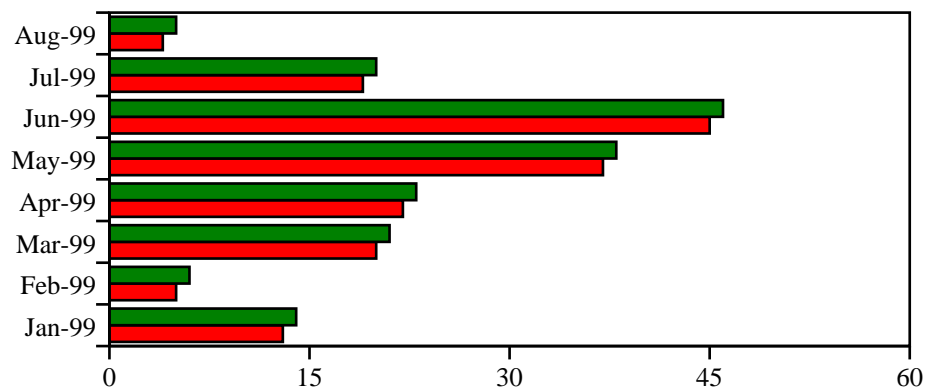

**sampleH2a( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleH2a():
    "Sample of multi-series bar chart."

    data = [(2.4, -5.7, 2, 5, 9.2),
            (0.6, -4.9, -3, 4, 6.8)
            ]

    labels = ("Q3 2000", "Year to Date", "12 months",
              "Annualised\n3 years", "Since 07.10.99")

    drawing = Drawing(400, 200)

    bc = HorizontalBarChart()
    bc.x = 80
    bc.y = 50
    bc.height = 120
    bc.width = 300
    bc.data = data


    bc.barSpacing = 0
    bc.groupSpacing = 10
    bc.barWidth = 10

    bc.valueAxis.valueMin = -15
    bc.valueAxis.valueMax = +15
    bc.valueAxis.valueStep = 5
    bc.valueAxis.labels.fontName = 'Helvetica'
    bc.valueAxis.labels.fontSize = 8
    bc.valueAxis.labels.boxAnchor = 'n' # irrelevant (becomes 'c')
    bc.valueAxis.labels.textAnchor = 'middle'
    bc.valueAxis.configure(bc.data)

    bc.categoryAxis.categoryNames = labels
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 8
    bc.categoryAxis.labels.dx = -150

    drawing.add(bc)

    return drawing
```

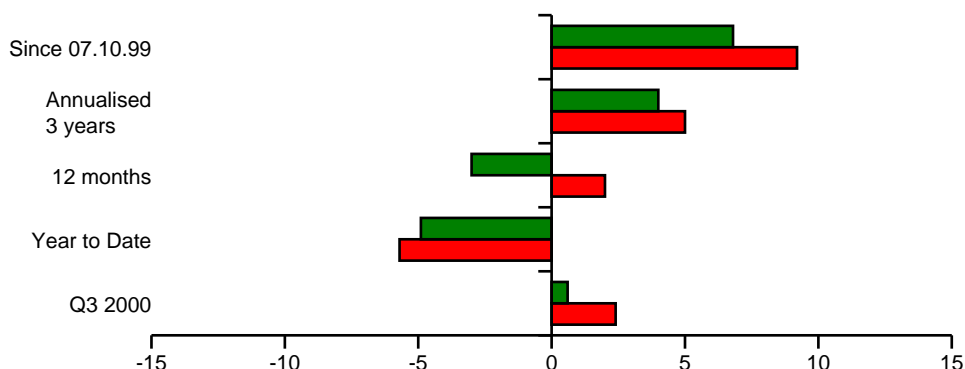

**sampleH2b( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleH2b():
    "Sample of multi-series bar chart."

    data = [(2.4, -5.7, 2, 5, 9.2),
            (0.6, -4.9, -3, 4, 6.8)
            ]

    labels = ("Q3 2000", "Year to Date", "12 months",
              "Annualised\n3 years", "Since 07.10.99")

    drawing = Drawing(400, 200)

    bc = HorizontalBarChart()
    bc.x = 80
    bc.y = 50
    bc.height = 120
    bc.width = 300
    bc.data = data


    bc.barSpacing = 5
    bc.groupSpacing = 10
    bc.barWidth = 10

    bc.valueAxis.valueMin = -15
    bc.valueAxis.valueMax = +15
    bc.valueAxis.valueStep = 5
    bc.valueAxis.labels.fontName = 'Helvetica'
    bc.valueAxis.labels.fontSize = 8
    bc.valueAxis.labels.boxAnchor = 'n' # irrelevant (becomes 'c')
    bc.valueAxis.labels.textAnchor = 'middle'

    bc.categoryAxis.categoryNames = labels
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 8
    bc.categoryAxis.labels.dx = -150

    drawing.add(bc)

    return drawing
```

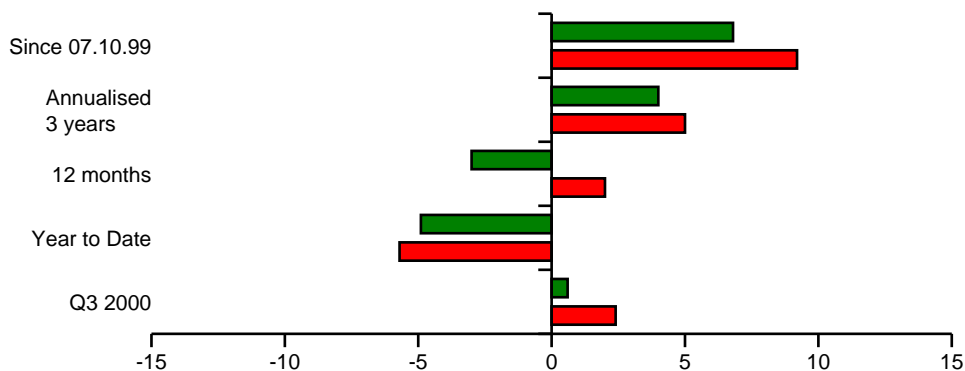

**sampleH2c( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleH2c():
    "Sample of multi-series bar chart."

    data = [(2.4, -5.7, 2, 5, 9.99),
            (0.6, -4.9, -3, 4, 9.99)
            ]

    labels = ("Q3 2000", "Year to Date", "12 months",
              "Annualised\n3 years", "Since 07.10.99")

    drawing = Drawing(400, 200)

    bc = HorizontalBarChart()
    bc.x = 80
    bc.y = 50
    bc.height = 120
    bc.width = 300
    bc.data = data

    bc.barSpacing = 2
    bc.groupSpacing = 10
    bc.barWidth = 10

    bc.valueAxis.valueMin = -15
    bc.valueAxis.valueMax = +15
    bc.valueAxis.valueStep = 5
    bc.valueAxis.labels.fontName = 'Helvetica'
    bc.valueAxis.labels.fontSize = 8
    bc.valueAxis.labels.boxAnchor = 'n'
    bc.valueAxis.labels.textAnchor = 'middle'


    bc.categoryAxis.categoryNames = labels
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 8
    bc.categoryAxis.labels.dx = -150

    bc.barLabels.nudge = 10

    bc.barLabelFormat = '%0.2f'
    bc.barLabels.dx = 0
    bc.barLabels.dy = 0
    bc.barLabels.boxAnchor = 'n' # irrelevant (becomes 'c')
    bc.barLabels.fontName = 'Helvetica'
    bc.barLabels.fontSize = 6

    drawing.add(bc)

    return drawing
```

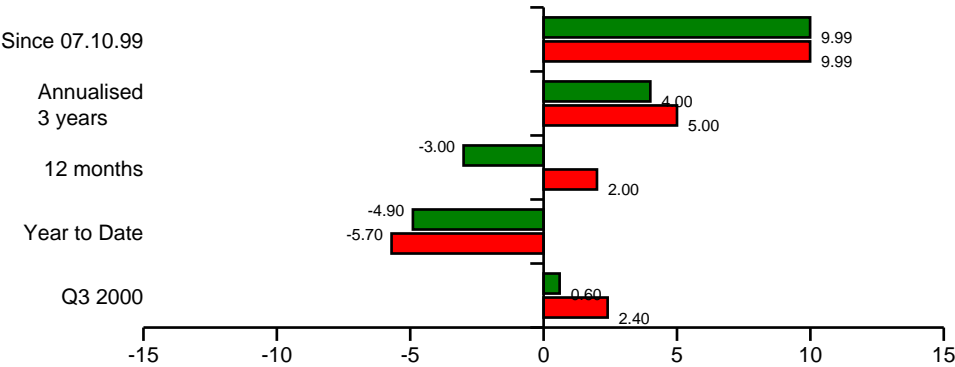

**sampleH3( ... )**

A really horizontal bar chart (compared to the equivalent faked one).

*Example*

```
def sampleH3():
    "A really horizontal bar chart (compared to the equivalent faked one)."
```

```
    names = ("UK Equities", "US Equities", "European Equities", "Japanese Equities",
             "Pacific (ex Japan) Equities", "Emerging Markets Equities",
             "UK Bonds", "Overseas Bonds", "UK Index-Linked", "Cash")

    series1 = (-1.5, 0.3, 0.5, 1.0, 0.8, 0.7, 0.4, 0.1, 1.0, 0.3)
    series2 = (0.0, 0.33, 0.55, 1.1, 0.88, 0.77, 0.44, 0.11, 1.10, 0.33)

    assert len(names) == len(series1), "bad data"
    assert len(names) == len(series2), "bad data"

    drawing = Drawing(400, 200)

    bc = HorizontalBarChart()
    bc.x = 100
    bc.y = 20
    bc.height = 150
    bc.width = 250
    bc.data = (series1,)
    bc.bars.fillColor = colors.green


    bc.barLabelFormat = '%0.2f'
    bc.barLabels.dx = 0
    bc.barLabels.dy = 0
    bc.barLabels.boxAnchor = 'w' # irrelevant (becomes 'c')
    bc.barLabels.fontName = 'Helvetica'
    bc.barLabels.fontSize = 6
    bc.barLabels.nudge = 10

    bc.valueAxis.visible = 0
    bc.valueAxis.valueMin = -2
    bc.valueAxis.valueMax = +2
    bc.valueAxis.valueStep = 1

    bc.categoryAxis.tickLeft = 0
    bc.categoryAxis.tickRight = 0
    bc.categoryAxis.categoryNames = names
    bc.categoryAxis.labels.boxAnchor = 'w'
    bc.categoryAxis.labels.dx = -170
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 6

    g = Group(bc)
    drawing.add(g)

    return drawing
```

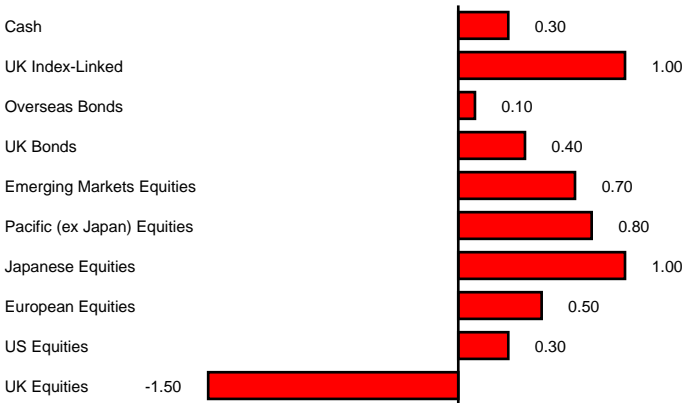

**sampleH4a( ... )**

A bar chart showing value axis region starting at *exactly* zero.

*Example*

```
def sampleH4a():
    "A bar chart showing value axis region starting at exactly zero."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

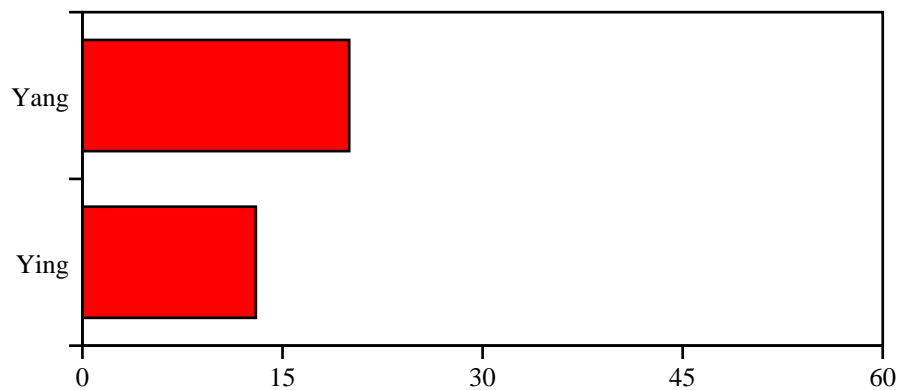



**sampleH4b( ... )**

A bar chart showing value axis region starting *\*below\** zero.

*Example*

```
def sampleH4b():
    "A bar chart showing value axis region starting *below* zero."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = -10
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

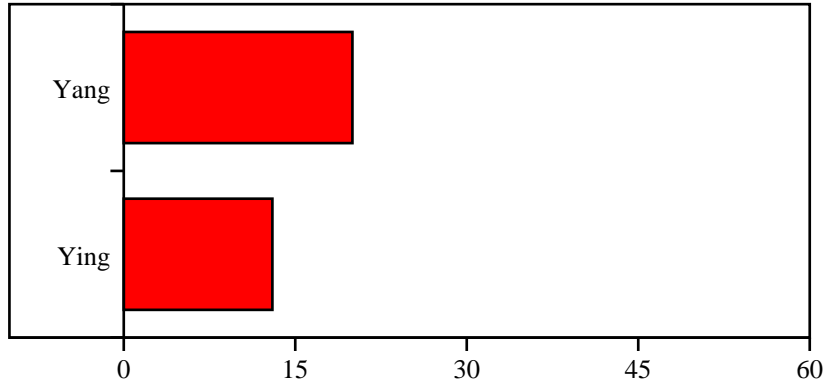

**sampleH4c( ... )**

A bar chart showing value axis region starting *above* zero.

*Example*

```
def sampleH4c():
    "A bar chart showing value axis region starting above zero."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 10
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

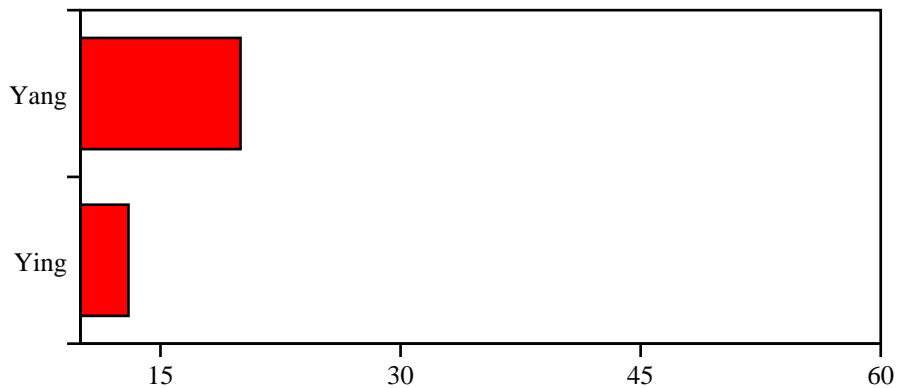

**sampleH4d( ... )**

A bar chart showing value axis region entirely *\*below\** zero.

*Example*

```
def sampleH4d():
    "A bar chart showing value axis region entirely *below* zero."

    drawing = Drawing(400, 200)

    data = [(-13, -20)]

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = -30
    bc.valueAxis.valueMax = -10
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

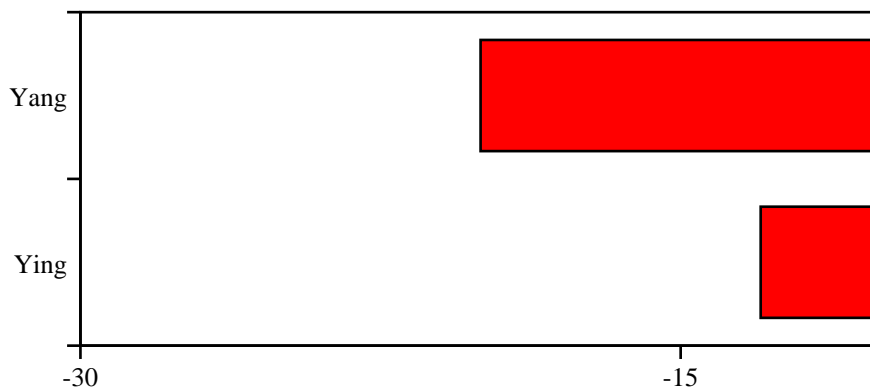

**sampleH5a( ... )**

A simple bar chart with no expressed spacing attributes.

*Example*

```
def sampleH5a():
    "A simple bar chart with no expressed spacing attributes."

    drawing = Drawing(400, 200)

    data = dataSample5


    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

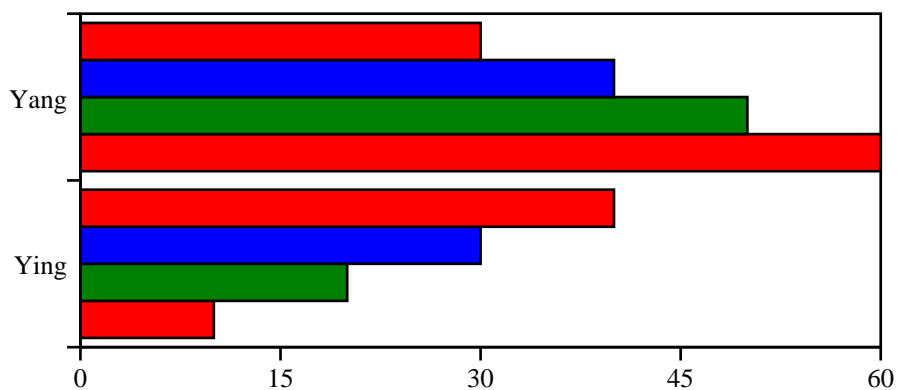

**sampleH5b( ... )**

A simple bar chart with proportional spacing.

*Example*

```
def sampleH5b():
    "A simple bar chart with proportional spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 0
    bc.barWidth = 40
    bc.groupSpacing = 20
    bc.barSpacing = 10

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

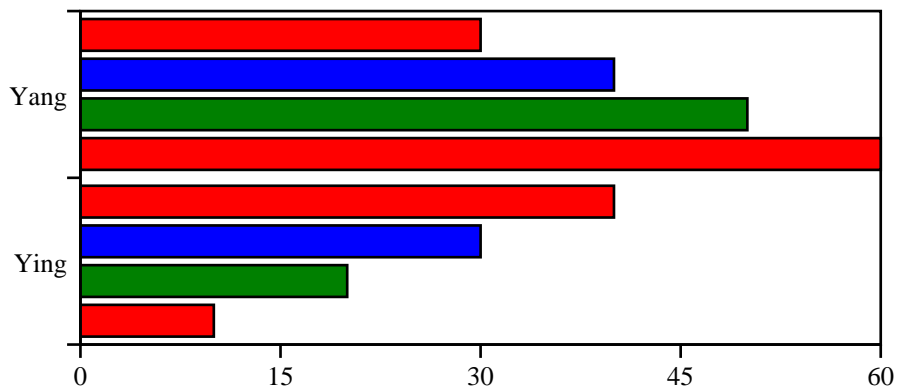

**sampleH5c1( ... )**

A simple bar chart with absolute spacing.

*Example*

```
def sampleH5c1():
    "A simple bar chart with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 10
    bc.groupSpacing = 0
    bc.barSpacing = 0

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

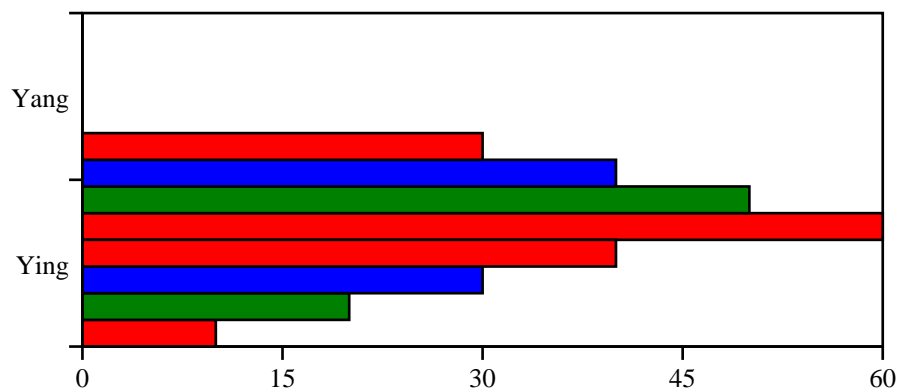

**sampleH5c2( ... )**

Simple bar chart with absolute spacing.

*Example*

```
def sampleH5c2():
    "Simple bar chart with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 10
    bc.groupSpacing = 20
    bc.barSpacing = 0

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

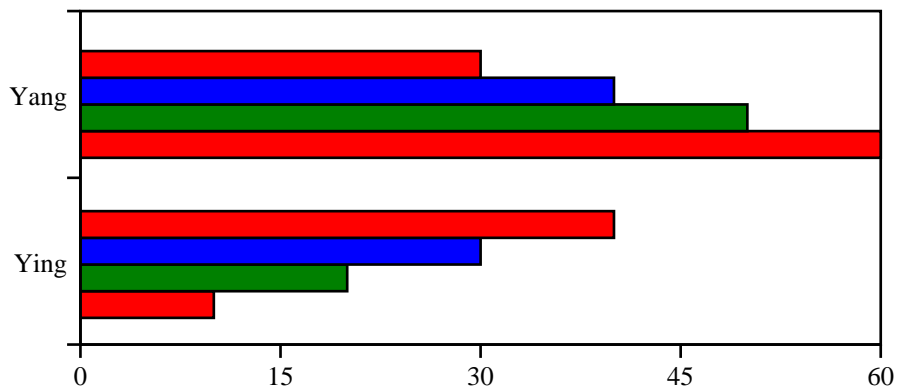

**sampleH5c3( ... )**

Simple bar chart with absolute spacing.

*Example*

```
def sampleH5c3():
    "Simple bar chart with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 20
    bc.height = 155
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 10
    bc.groupSpacing = 0
    bc.barSpacing = 2

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

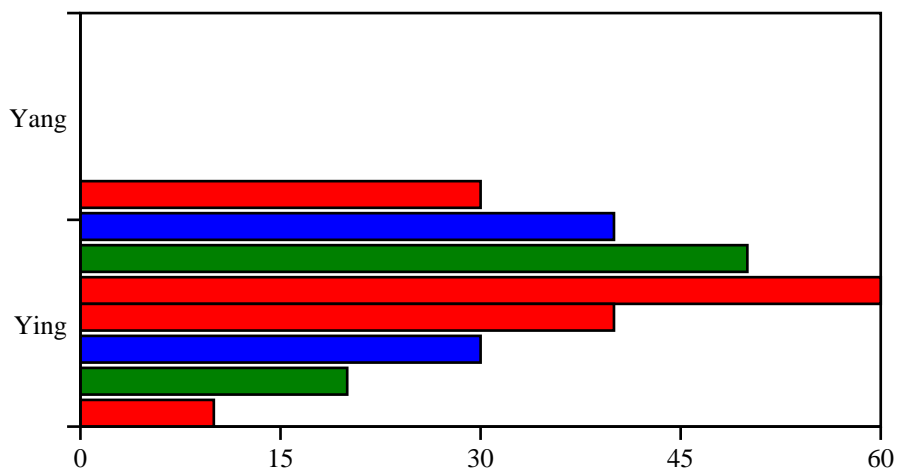



**sampleH5c4( ... )**

Simple bar chart with absolute spacing.

*Example*

```
def sampleH5c4():
    "Simple bar chart with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = HorizontalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 10
    bc.groupSpacing = 20
    bc.barSpacing = 10

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

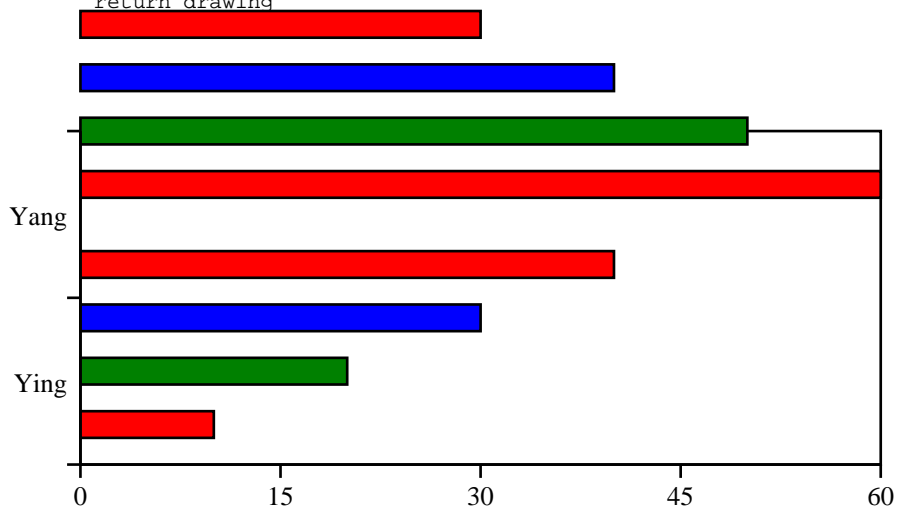

**sampleStacked1( ... )**

Simple bar chart using symbol attribute.

*Example*

```
def sampleStacked1():
    "Simple bar chart using symbol attribute."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.categoryAxis.style = 'stacked'
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.barWidth = 10
    bc.groupSpacing = 15
    bc.valueAxis.valueMin = 0

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    from reportlab.graphics.widgets.grids import ShadedRect
    bc.bars.symbol = ShadedRect()
    bc.bars.symbol.fillColorStart = colors.red
    bc.bars.symbol.fillColorEnd = colors.white
    bc.bars.symbol.orientation = 'vertical'
    bc.bars.symbol.cylinderMode = 1
    bc.bars.symbol.strokeWidth = 0


    bc.bars[1].symbol = ShadedRect()
    bc.bars[1].symbol.fillColorStart = colors.magenta
    bc.bars[1].symbol.fillColorEnd = colors.white
    bc.bars[1].symbol.orientation = 'vertical'
    bc.bars[1].symbol.cylinderMode = 1
    bc.bars[1].symbol.strokeWidth = 0

    bc.bars[2].symbol = ShadedRect()
    bc.bars[2].symbol.fillColorStart = colors.green
    bc.bars[2].symbol.fillColorEnd = colors.white
    bc.bars[2].symbol.orientation = 'vertical'
    bc.bars[2].symbol.cylinderMode = 1
    bc.bars[2].symbol.strokeWidth = 0

    bc.bars[3].symbol = ShadedRect()
    bc.bars[3].symbol.fillColorStart = colors.blue
    bc.bars[3].symbol.fillColorEnd = colors.white
    bc.bars[3].symbol.orientation = 'vertical'
    bc.bars[3].symbol.cylinderMode = 1
    bc.bars[3].symbol.strokeWidth = 0

    drawing.add(bc)

    return drawing
```

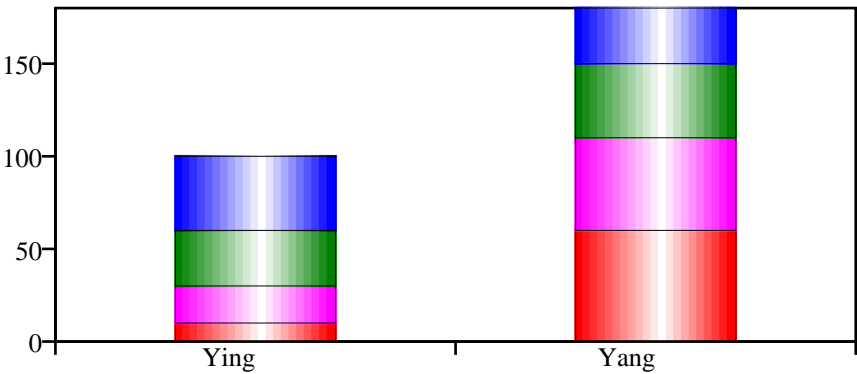

**sampleSymbol1( ... )**

Simple bar chart using symbol attribute.

*Example*

```
def sampleSymbol1():
    "Simple bar chart using symbol attribute."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.barWidth = 10
    bc.groupSpacing = 15
    bc.barSpacing = 3

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'e'
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    from reportlab.graphics.widgets.grids import ShadedRect
    sym1 = ShadedRect()
    sym1.fillColorStart = colors.black
    sym1.fillColorEnd = colors.blue
    sym1.orientation = 'horizontal'
    sym1.strokeWidth = 0


    sym2 = ShadedRect()
    sym2.fillColorStart = colors.black
    sym2.fillColorEnd = colors.pink
    sym2.orientation = 'horizontal'
    sym2.strokeWidth = 0

    sym3 = ShadedRect()
    sym3.fillColorStart = colors.blue
    sym3.fillColorEnd = colors.white
    sym3.orientation = 'vertical'
    sym3.cylinderMode = 1
    sym3.strokeWidth = 0

    bc.bars.symbol = sym1
    bc.bars[2].symbol = sym2
    bc.bars[3].symbol = sym3

    drawing.add(bc)

    return drawing
```

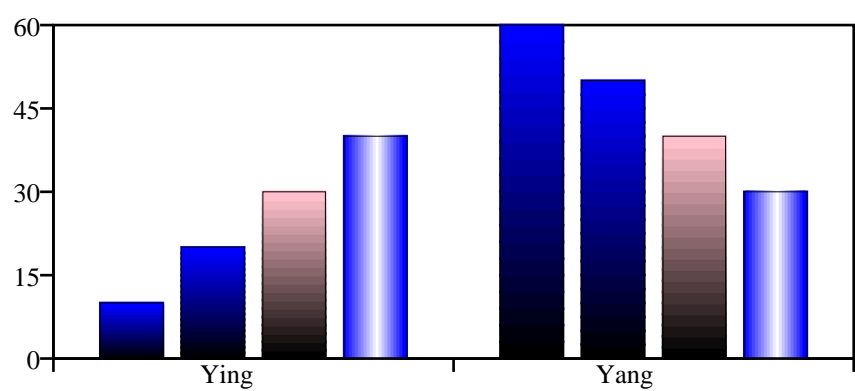

**sampleV0a( ... )**

A slightly pathologic bar chart with only TWO data items.

*Example*

```
def sampleV0a():
    "A slightly pathologic bar chart with only TWO data items."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'ne'
    bc.categoryAxis.labels.dx = 8
    bc.categoryAxis.labels.dy = -2
    bc.categoryAxis.labels.angle = 30
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

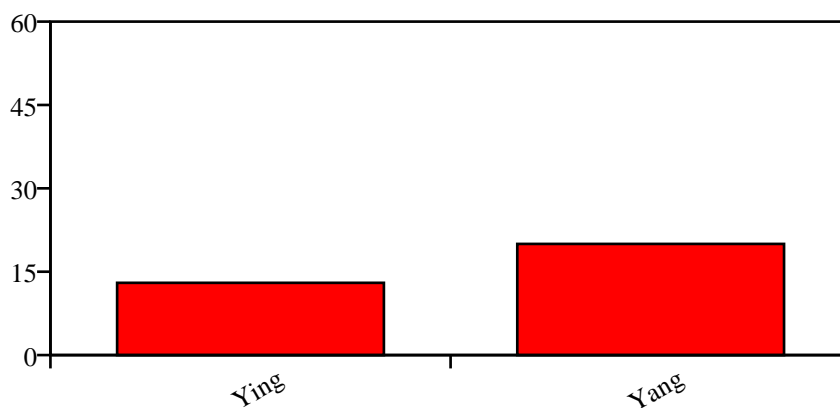

**sampleV0b( ... )**

A pathologic bar chart with only ONE data item.

*Example*

```
def sampleV0b():
    "A pathologic bar chart with only ONE data item."

    drawing = Drawing(400, 200)

    data = [(42,)]


    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 50
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'ne'
    bc.categoryAxis.labels.dx = 8
    bc.categoryAxis.labels.dy = -2
    bc.categoryAxis.labels.angle = 30
    bc.categoryAxis.categoryNames = ['Jan-99']

    drawing.add(bc)

    return drawing
```

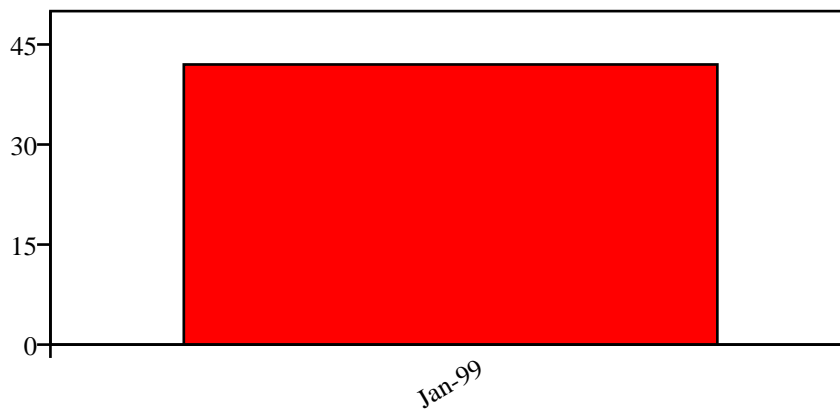

**sampleV0c( ... )**

A really pathologic bar chart with NO data items at all!

*Example*

```
def sampleV0c():
    "A really pathologic bar chart with NO data items at all!"

    drawing = Drawing(400, 200)

    data = [()]


    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'ne'
    bc.categoryAxis.labels.dx = 8
    bc.categoryAxis.labels.dy = -2
    bc.categoryAxis.categoryNames = []

    drawing.add(bc)

    return drawing
```

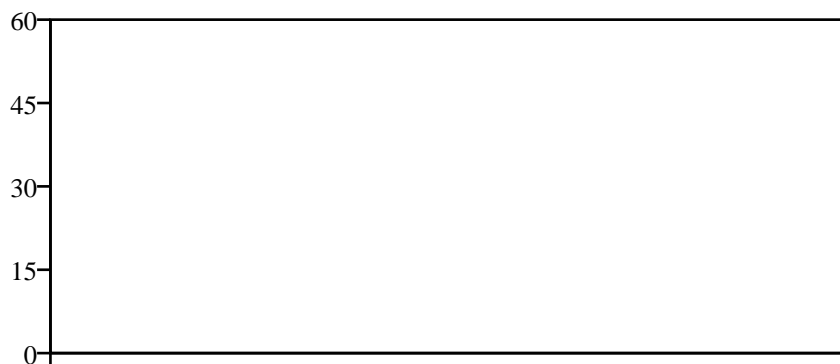



**sampleV1( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleV1():
    "Sample of multi-series bar chart."

    drawing = Drawing(400, 200)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (14, 6, 21, 23, 38, 46, 20, 5)
    ]


    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'ne'
    bc.categoryAxis.labels.dx = 8
    bc.categoryAxis.labels.dy = -2
    bc.categoryAxis.labels.angle = 30

    catNames = 'Jan Feb Mar Apr May Jun Jul Aug'.split(' ')
    catNames = map(lambda n:n+'-99', catNames)
    bc.categoryAxis.categoryNames = catNames
    drawing.add(bc)

    return drawing
```

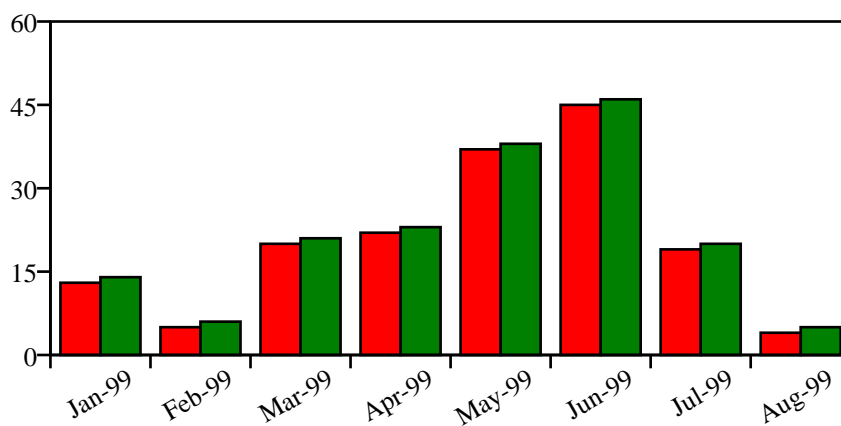

**sampleV2a( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleV2a():
    "Sample of multi-series bar chart."

    data = [(2.4, -5.7, 2, 5, 9.2),
            (0.6, -4.9, -3, 4, 6.8)
            ]

    labels = ("Q3 2000", "Year to Date", "12 months",
              "Annualised\n3 years", "Since 07.10.99")

    drawing = Drawing(400, 200)

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 120
    bc.width = 300
    bc.data = data


    bc.barSpacing = 0
    bc.groupSpacing = 10
    bc.barWidth = 10

    bc.valueAxis.valueMin = -15
    bc.valueAxis.valueMax = +15
    bc.valueAxis.valueStep = 5
    bc.valueAxis.labels.fontName = 'Helvetica'
    bc.valueAxis.labels.fontSize = 8
    bc.valueAxis.labels.boxAnchor = 'n' # irrelevant (becomes 'c')
    bc.valueAxis.labels.textAnchor = 'middle'

    bc.categoryAxis.categoryNames = labels
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 8
    bc.categoryAxis.labels.dy = -60

    drawing.add(bc)

    return drawing
```

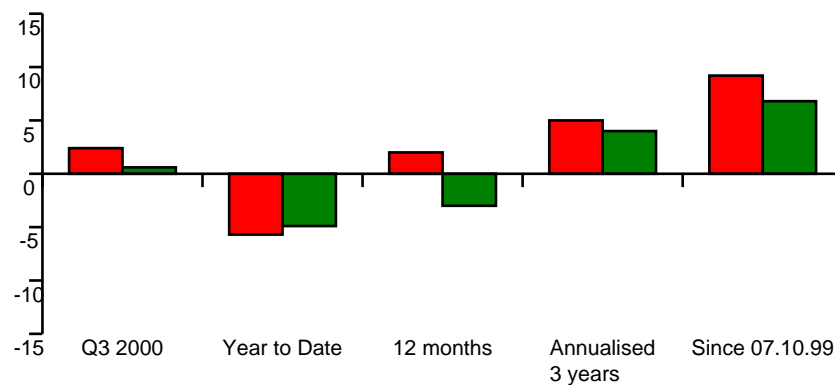

**sampleV2b( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleV2b():
    "Sample of multi-series bar chart."

    data = [(2.4, -5.7, 2, 5, 9.2),
            (0.6, -4.9, -3, 4, 6.8)
            ]

    labels = ("Q3 2000", "Year to Date", "12 months",
              "Annualised\n3 years", "Since 07.10.99")

    drawing = Drawing(400, 200)

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 120
    bc.width = 300
    bc.data = data


    bc.barSpacing = 5
    bc.groupSpacing = 10
    bc.barWidth = 10

    bc.valueAxis.valueMin = -15
    bc.valueAxis.valueMax = +15
    bc.valueAxis.valueStep = 5
    bc.valueAxis.labels.fontName = 'Helvetica'
    bc.valueAxis.labels.fontSize = 8
    bc.valueAxis.labels.boxAnchor = 'n' # irrelevant (becomes 'c')
    bc.valueAxis.labels.textAnchor = 'middle'

    bc.categoryAxis.categoryNames = labels
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 8
    bc.categoryAxis.labels.dy = -60

    drawing.add(bc)

    return drawing
```

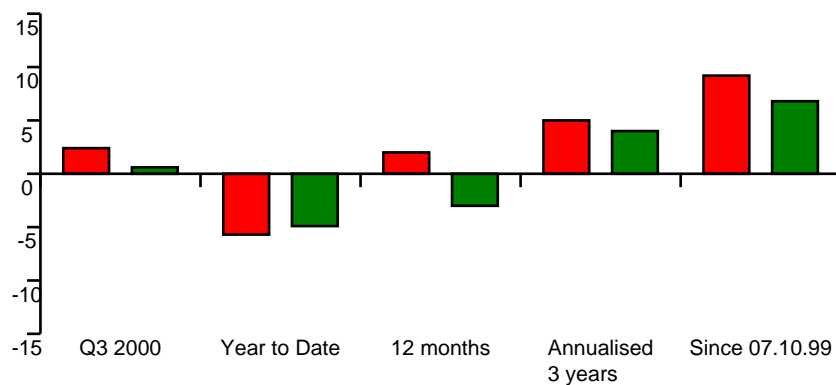

**sampleV2c( ... )**

Sample of multi-series bar chart.

*Example*

```
def sampleV2c():
    "Sample of multi-series bar chart."

    data = [(2.4, -5.7, 2, 5, 9.99),
            (0.6, -4.9, -3, 4, 9.99)
            ]

    labels = ("Q3 2000", "Year to Date", "12 months",
              "Annualised\n3 years", "Since 07.10.99")

    drawing = Drawing(400, 200)

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 120
    bc.width = 300
    bc.data = data

    bc.barSpacing = 2
    bc.groupSpacing = 10
    bc.barWidth = 10

    bc.valueAxis.valueMin = -15
    bc.valueAxis.valueMax = +15
    bc.valueAxis.valueStep = 5
    bc.valueAxis.labels.fontName = 'Helvetica'
    bc.valueAxis.labels.fontSize = 8


    bc.categoryAxis.categoryNames = labels
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 8
    bc.valueAxis.labels.boxAnchor = 'n'
    bc.valueAxis.labels.textAnchor = 'middle'
    bc.categoryAxis.labels.dy = -60

    bc.barLabels.nudge = 10

    bc.barLabelFormat = '%0.2f'
    bc.barLabels.dx = 0
    bc.barLabels.dy = 0
    bc.barLabels.boxAnchor = 'n' # irrelevant (becomes 'c')
    bc.barLabels.fontName = 'Helvetica'
    bc.barLabels.fontSize = 6

    drawing.add(bc)

    return drawing
```

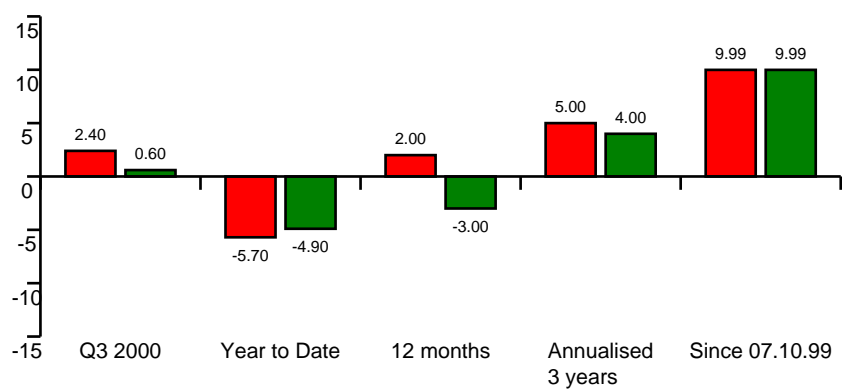

**sampleV3( ... )**

Faked horizontal bar chart using a vertical real one (deprecated).

*Example*

```
def sampleV3():
    "Faked horizontal bar chart using a vertical real one (deprecated)."
```

```
    names = ("UK Equities", "US Equities", "European Equities", "Japanese Equities",
             "Pacific (ex Japan) Equities", "Emerging Markets Equities",
             "UK Bonds", "Overseas Bonds", "UK Index-Linked", "Cash")

    series1 = (-1.5, 0.3, 0.5, 1.0, 0.8, 0.7, 0.4, 0.1, 1.0, 0.3)
    series2 = (0.0, 0.33, 0.55, 1.1, 0.88, 0.77, 0.44, 0.11, 1.10, 0.33)

    assert len(names) == len(series1), "bad data"
    assert len(names) == len(series2), "bad data"

    drawing = Drawing(400, 200)

    bc = VerticalBarChart()
    bc.x = 0
    bc.y = 0
    bc.height = 100
    bc.width = 150
    bc.data = (series1,)
    bc.bars.fillColor = colors.green

    bc.barLabelFormat = '%0.2f'
    bc.barLabels.dx = 0
    bc.barLabels.dy = 0
    bc.barLabels.boxAnchor = 'w' # irrelevant (becomes 'c')
    bc.barLabels.angle = 90
    bc.barLabels.fontName = 'Helvetica'
    bc.barLabels.fontSize = 6
    bc.barLabels.nudge = 10


    bc.valueAxis.visible = 0
    bc.valueAxis.valueMin = -2
    bc.valueAxis.valueMax = +2
    bc.valueAxis.valueStep = 1

    bc.categoryAxis.tickUp = 0
    bc.categoryAxis.tickDown = 0
    bc.categoryAxis.categoryNames = names
    bc.categoryAxis.labels.angle = 90
    bc.categoryAxis.labels.boxAnchor = 'w'
    bc.categoryAxis.labels.dx = 0
    bc.categoryAxis.labels.dy = -125
    bc.categoryAxis.labels.fontName = 'Helvetica'
    bc.categoryAxis.labels.fontSize = 6

    g = Group(bc)
    g.translate(100, 175)
    g.rotate(-90)

    drawing.add(g)

    return drawing
```

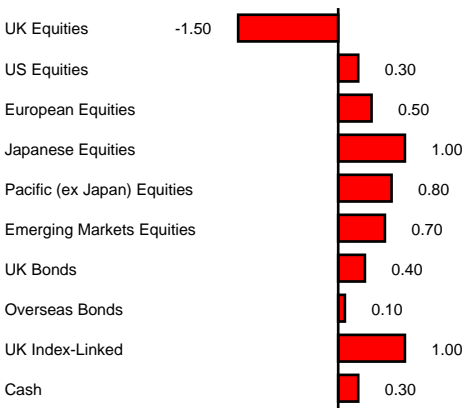

**sampleV4a( ... )**

A bar chart showing value axis region starting at *exactly* zero.

*Example*

```
def sampleV4a():
    "A bar chart showing value axis region starting at exactly zero."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

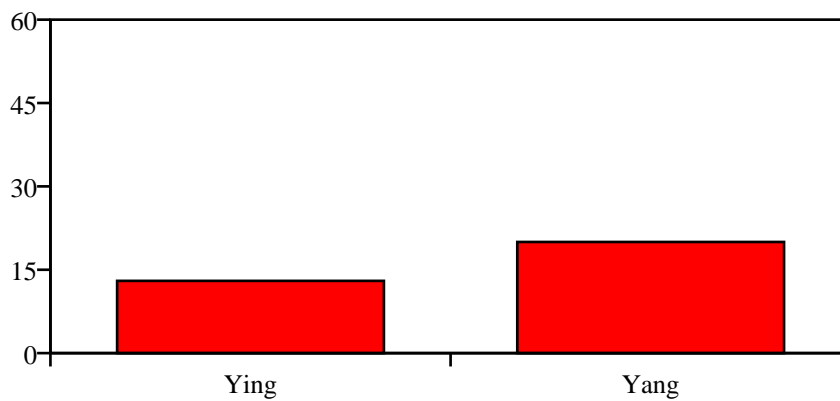



**sampleV4b( ... )**

A bar chart showing value axis region starting \*below\* zero.

*Example*

```
def sampleV4b():
    "A bar chart showing value axis region starting *below* zero."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = -10
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

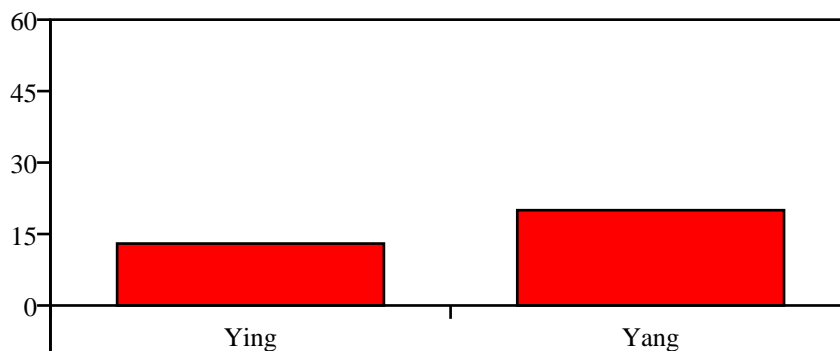

**sampleV4c( ... )**

A bar chart showing value axis region starting \*above\* zero.

*Example*

```
def sampleV4c():
    "A bar chart showing value axis region starting *above* zero."

    drawing = Drawing(400, 200)

    data = [(13, 20)]

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 10
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

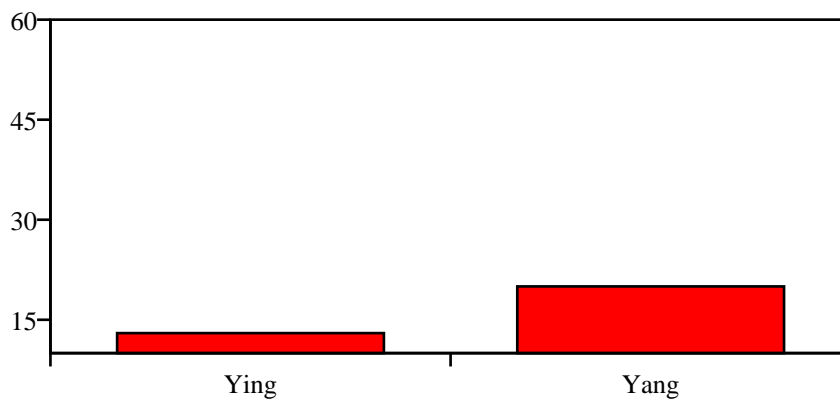

**sampleV4d( ... )**

A bar chart showing value axis region entirely *\*below\** zero.

*Example*

```
def sampleV4d():
    "A bar chart showing value axis region entirely *below* zero."

    drawing = Drawing(400, 200)

    data = [(-13, -20)]

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data


    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = -30
    bc.valueAxis.valueMax = -10
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

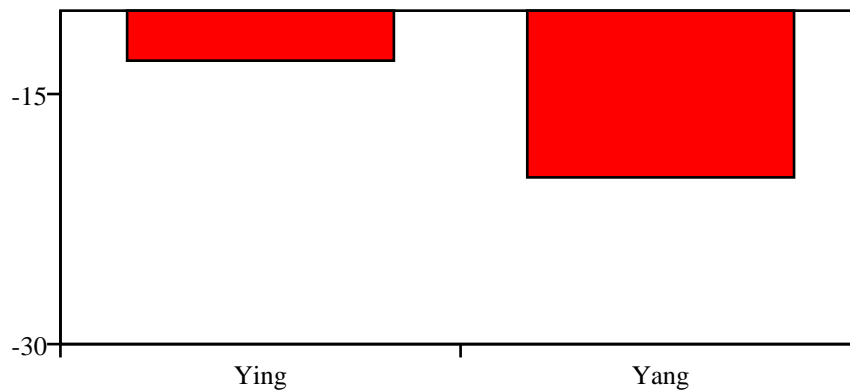

**sampleV5a( ... )**

A simple bar chart with no expressed spacing attributes.

*Example*

```
def sampleV5a():
    "A simple bar chart with no expressed spacing attributes."

    drawing = Drawing(400, 200)

    data = dataSample5


    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

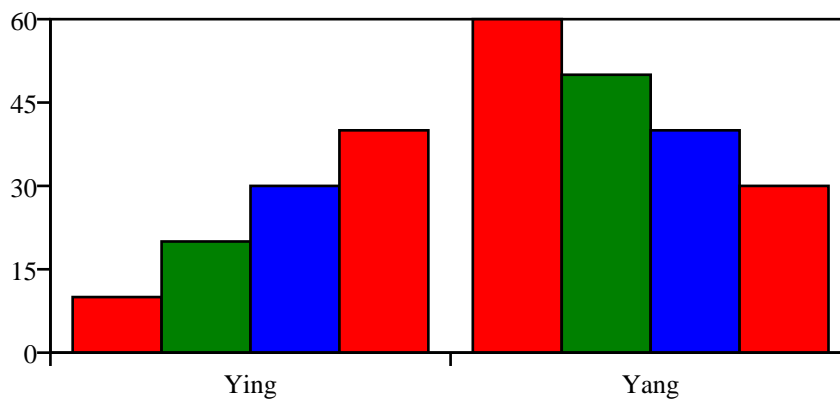

**sampleV5b( ... )**

A simple bar chart with proportional spacing.

*Example*

```
def sampleV5b():
    "A simple bar chart with proportional spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 0
    bc.barWidth = 40
    bc.groupSpacing = 20
    bc.barSpacing = 10

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

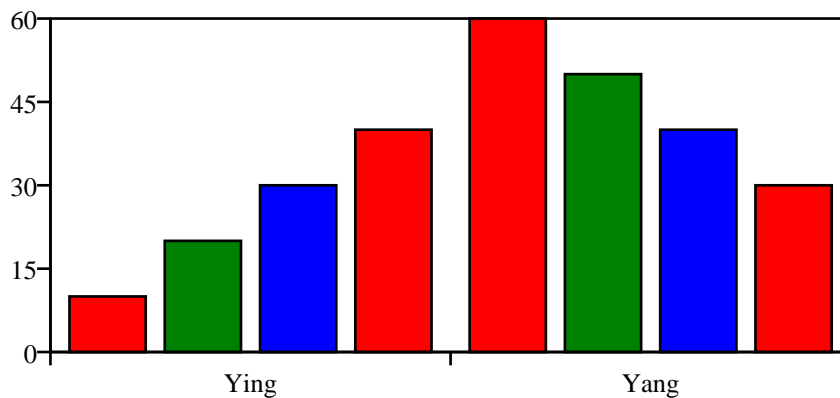

**sampleV5c1( ... )**

Make sampe simple bar chart but with absolute spacing.

*Example*

```
def sampleV5c1():
    "Make sampe simple bar chart but with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 40
    bc.groupSpacing = 0
    bc.barSpacing = 0

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

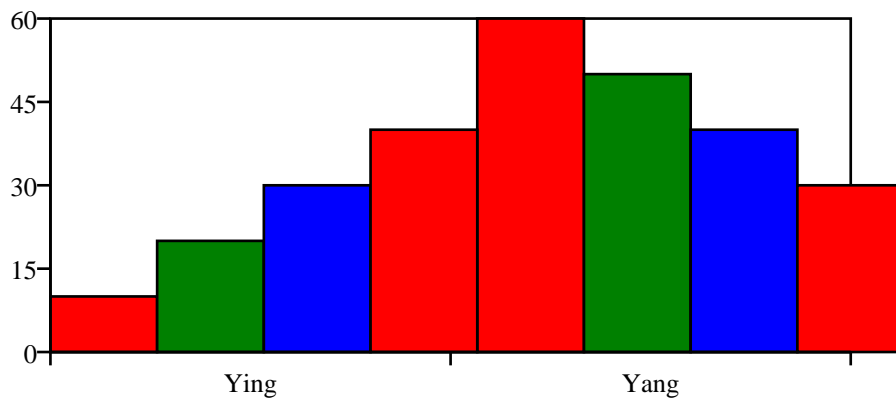

**sampleV5c2( ... )**

Make sampe simple bar chart but with absolute spacing.

*Example*

```
def sampleV5c2():
    "Make sampe simple bar chart but with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 40
    bc.groupSpacing = 20
    bc.barSpacing = 0

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

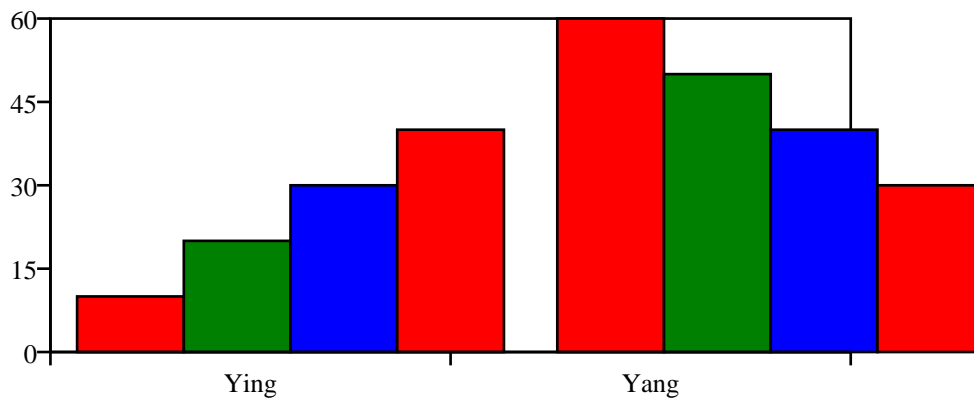

**sampleV5c3( ... )**

Make sampe simple bar chart but with absolute spacing.

*Example*

```
def sampleV5c3():
    "Make sampe simple bar chart but with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 40
    bc.groupSpacing = 0
    bc.barSpacing = 10

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

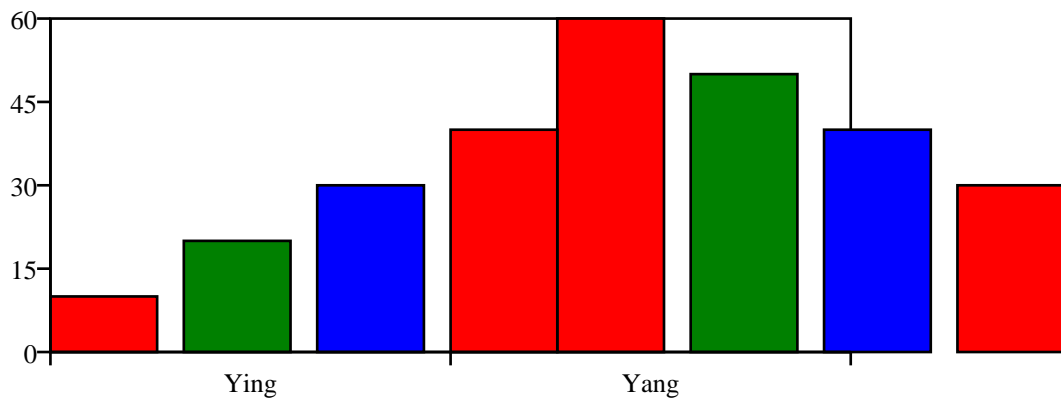



**sampleV5c4( ... )**

Make sampe simple bar chart but with absolute spacing.

*Example*

```
def sampleV5c4():
    "Make sampe simple bar chart but with absolute spacing."

    drawing = Drawing(400, 200)

    data = dataSample5

    bc = VerticalBarChart()
    bc.x = 50
    bc.y = 50
    bc.height = 125
    bc.width = 300
    bc.data = data
    bc.strokeColor = colors.black


    bc.useAbsolute = 1
    bc.barWidth = 40
    bc.groupSpacing = 20
    bc.barSpacing = 10

    bc.valueAxis.valueMin = 0
    bc.valueAxis.valueMax = 60
    bc.valueAxis.valueStep = 15

    bc.categoryAxis.labels.boxAnchor = 'n'
    bc.categoryAxis.labels.dy = -5
    bc.categoryAxis.categoryNames = ['Ying', 'Yang']

    drawing.add(bc)

    return drawing
```

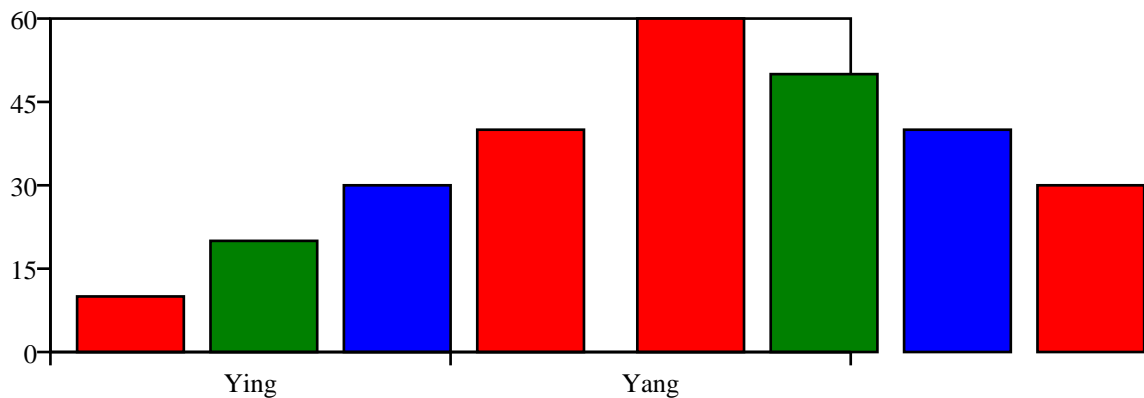

## linecharts

This module defines a very preliminary Line Chart example.

### Classes

#### **AbstractLineChart (PlotArea)**

##### **Public Attributes**

**background** Handle to background object e.g. Rect(0,0,width,height).

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

##### *Example*

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

##### *Properties of Example Widget*

```
background = None
debug = 0
fillColor = None
height = 85
strokeColor = None
strokeWidth = 1
width = 180
x = 20
y = 10
```

## HorizontalLineChart (LineChart)

Line chart with multiple lines.

A line chart is assumed to have one category and one value axis. Despite its generic name this particular line chart class has a vertical value axis and a horizontal category one. It may evolve into individual horizontal and vertical variants (like with the existing bar charts).

Available attributes are:

x: x-position of lower-left chart origin

y: y-position of lower-left chart origin

width: chart width

height: chart height

useAbsolute: disables auto-scaling of chart elements (?)

lineLabelNudge: distance of data labels to data points

lineLabels: labels associated with data values

lineLabelFormat: format string or callback function

groupSpacing: space between categories

joinedLines: enables drawing of lines

strokeColor: color of chart lines (?)

fillColor: color for chart background (?)

lines: style list, used cyclically for data series

valueAxis: value axis object

categoryAxis: category axis object

categoryNames: category names

data: chart data, a list of data series of equal length

## Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**categoryAxis** Handle of the category axis.

**categoryNames** List of category names.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** ? - Likely to disappear.

**height** Height of the chart.

**inFill** Whether infilling should be done.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**useAbsolute** Flag to use absolute spacing values.

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

### *Example*

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(200, 100)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (14, 10, 21, 28, 38, 46, 25, 5)
    ]

    lc = HorizontalLineChart()

    lc.x = 20
    lc.y = 10
    lc.height = 85
    lc.width = 170
    lc.data = data
    lc.lines.symbol = makeMarker('Circle')

    drawing.add(lc)

    return drawing
```

### *Properties of Example Widget*

```
background = None
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13c1968>
categoryAxis.loLLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
```

```
categoryAxis.style = 'parallel'
categoryAxis.tickDown = 5
categoryAxis.tickShift = 0
categoryAxis.tickUp = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
categoryNames = ('North', 'South', 'East', 'West')
data = [(100, 110, 120, 130), (70, 80, 80, 90)]
debug = 0
fillColor = None
groupSpacing = 1
height = 85
inFill = 0
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13c1a80>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13c1a30>
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLLen = 0
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13c19e0>
valueAxis.loLLen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickLeft = 5
valueAxis.tickRight = 0
```

```
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## HorizontalLineChart3D(HorizontalLineChart)

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**categoryAxis** Handle of the category axis.

**categoryNames** List of category names.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** ? - Likely to disappear.

**height** Height of the chart.

**inFill** Whether infilling should be done.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**theta\_x**  $dx/dz$

**theta\_y**  $dy/dz$

**useAbsolute** Flag to use absolute spacing values.

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

**zDepth** depth of an individual series

**zSpace** z gap around series

### Example

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(200, 100)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (14, 10, 21, 28, 38, 46, 25, 5)
    ]

    lc = HorizontalLineChart()
    lc.x = 20
```

```
lc.y = 10
lc.height = 85
lc.width = 170
lc.data = data
lc.lines.symbol = makeMarker('Circle')

drawing.add(lc)

return drawing
```

### *Properties of Example Widget*

```
background = None
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x13bdfa8>
categoryAxis.loLLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
categoryAxis.style = 'parallel'
categoryAxis.tickDown = 5
categoryAxis.tickShift = 0
categoryAxis.tickUp = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
categoryNames = ('North', 'South', 'East', 'West')
data = [(100, 110, 120, 130), (70, 80, 80, 90)]
debug = 0
fillColor = None
groupSpacing = 1
height = 85
inFill = 0
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x15020f8>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x15020a8>
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
```



```
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLLen = 0
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1502058>
valueAxis.loLLen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickLeft = 5
valueAxis.tickRight = 0
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## LineChart (AbstractLineChart)

### Public Attributes

**background** Handle to background object e.g. Rect(0,0,width,height).

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
background = None
debug = 0
fillColor = None
height = 85
strokeColor = None
strokeWidth = 1
width = 180
x = 20
y = 10
```

## **SampleHorizontalLineChart(HorizontalLineChart)**

Sample class overwriting one method to draw additional horizontal lines.

### **Public Attributes**

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**categoryAxis** Handle of the category axis.

**categoryNames** List of category names.

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**groupSpacing** ? - Likely to disappear.

**height** Height of the chart.

**inFill** Whether infilling should be done.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**useAbsolute** Flag to use absolute spacing values.

**valueAxis** Handle of the value axis.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

### *Example*

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(200, 100)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (14, 10, 21, 28, 38, 46, 25, 5)
    ]

    lc = SampleHorizontalLineChart()

    lc.x = 20
    lc.y = 10
    lc.height = 85
    lc.width = 170
    lc.data = data
```

```
lc.strokeColor = colors.white
lc.fillColor = colors.HexColor(0xCCCCCC)

drawing.add(lc)

return drawing
```

### *Properties of Example Widget*

```
background = None
categoryAxis.categoryNames = None
categoryAxis.drawGridLast = False
categoryAxis.gridEnd = None
categoryAxis.gridStart = None
categoryAxis.gridStrokeColor = Color(0,0,0,1)
categoryAxis.gridStrokeDashArray = None
categoryAxis.gridStrokeLineCap = 0
categoryAxis.gridStrokeLineJoin = 0
categoryAxis.gridStrokeMiterLimit = 10
categoryAxis.gridStrokeWidth = 0.25
categoryAxis.hiLLen = 0
categoryAxis.hiPad = 0
categoryAxis.joinAxis = None
categoryAxis.joinAxisMode = None
categoryAxis.joinAxisPos = None
categoryAxis.labelAxisMode = 'axis'
categoryAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1568238>
categoryAxis.loLLen = 0
categoryAxis.loPad = 0
categoryAxis.reverseDirection = 0
categoryAxis.strokeColor = Color(0,0,0,1)
categoryAxis.strokeDashArray = None
categoryAxis.strokeLineCap = 0
categoryAxis.strokeLineJoin = 0
categoryAxis.strokeMiterLimit = 10
categoryAxis.strokeWidth = 1
categoryAxis.style = 'parallel'
categoryAxis.tickDown = 5
categoryAxis.tickShift = 0
categoryAxis.tickUp = 0
categoryAxis.visible = 1
categoryAxis.visibleAxis = 1
categoryAxis.visibleGrid = 0
categoryAxis.visibleLabels = 1
categoryAxis.visibleTicks = 1
categoryNames = ('North', 'South', 'East', 'West')
data = [(100, 110, 120, 130), (70, 80, 80, 90)]
debug = 0
fillColor = None
groupSpacing = 1
height = 85
inFill = 0
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1568350>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1568300>
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
useAbsolute = 0
valueAxis.abf_ignore_zero = False
valueAxis.avoidBoundFrac = None
valueAxis.avoidBoundSpace = None
valueAxis.drawGridLast = False
valueAxis.forceZero = 0
valueAxis.gridEnd = None
valueAxis.gridStart = None
valueAxis.gridStrokeColor = Color(0,0,0,1)
valueAxis.gridStrokeDashArray = None
valueAxis.gridStrokeLineCap = 0
valueAxis.gridStrokeLineJoin = 0
valueAxis.gridStrokeMiterLimit = 10
valueAxis.gridStrokeWidth = 0.25
valueAxis.hiLLen = 0
```

```
valueAxis.joinAxis = None
valueAxis.joinAxisMode = None
valueAxis.joinAxisPos = None
valueAxis.keepTickLabelsInside = 0
valueAxis.labelAxisMode = 'axis'
valueAxis.labelTextFormat = None
valueAxis.labelTextPostFormat = None
valueAxis.labelTextScale = None
valueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x15682b0>
valueAxis.loLlen = 0
valueAxis.maximumTicks = 7
valueAxis.minimumTickSpacing = 10
valueAxis.origShiftIPC = None
valueAxis.origShiftMin = None
valueAxis.origShiftSpecialValue = None
valueAxis.rangeRound = 'none'
valueAxis.reverseDirection = 0
valueAxis.skipEndL = 'none'
valueAxis.strokeColor = Color(0,0,0,1)
valueAxis.strokeDashArray = None
valueAxis.strokeLineCap = 0
valueAxis.strokeLineJoin = 0
valueAxis.strokeMiterLimit = 10
valueAxis.strokeWidth = 1
valueAxis.style = 'normal'
valueAxis.subGridEnd = None
valueAxis.subGridStart = None
valueAxis.subGridStrokeColor = Color(0,0,0,1)
valueAxis.subGridStrokeDashArray = None
valueAxis.subGridStrokeLineCap = 0
valueAxis.subGridStrokeLineJoin = 0
valueAxis.subGridStrokeMiterLimit = 10
valueAxis.subGridStrokeWidth = 0.25
valueAxis.subTickHi = 0
valueAxis.subTickLo = 0
valueAxis.subTickNum = 0
valueAxis.tickAxisMode = 'axis'
valueAxis.tickLeft = 5
valueAxis.tickRight = 0
valueAxis.valueMax = None
valueAxis.valueMin = None
valueAxis.valueStep = None
valueAxis.visible = 1
valueAxis.visibleAxis = 1
valueAxis.visibleGrid = 0
valueAxis.visibleLabels = 1
valueAxis.visibleSubGrid = 0
valueAxis.visibleSubTicks = 0
valueAxis.visibleTicks = 1
valueAxis.zrangePref = 0
width = 180
x = 20
y = 10
```

## VerticalLineChart (LineChart)

### Public Attributes

**background** Handle to background object e.g. Rect(0,0,width,height).

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
background = None
debug = 0
fillColor = None
height = 85
strokeColor = None
strokeWidth = 1
width = 180
x = 20
y = 10
```

## Functions

**sample1( ... )**

### Example

```
def sample1():
    drawing = Drawing(400, 200)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (5, 20, 46, 38, 23, 21, 6, 14)
    ]

    lc = HorizontalLineChart()


    lc.x = 50
    lc.y = 50
    lc.height = 125
    lc.width = 300
    lc.data = data
    lc.joinedLines = 1
    lc.lines.symbol = makeMarker('FilledDiamond')
    lc.lineLabelFormat = '%2.0f'

    catNames = 'Jan Feb Mar Apr May Jun Jul Aug'.split(' ')
    lc.categoryAxis.categoryNames = catNames
    lc.categoryAxis.labels.boxAnchor = 'n'

    lc.valueAxis.valueMin = 0
    lc.valueAxis.valueMax = 60
    lc.valueAxis.valueStep = 15

    drawing.add(lc)

    return drawing
```

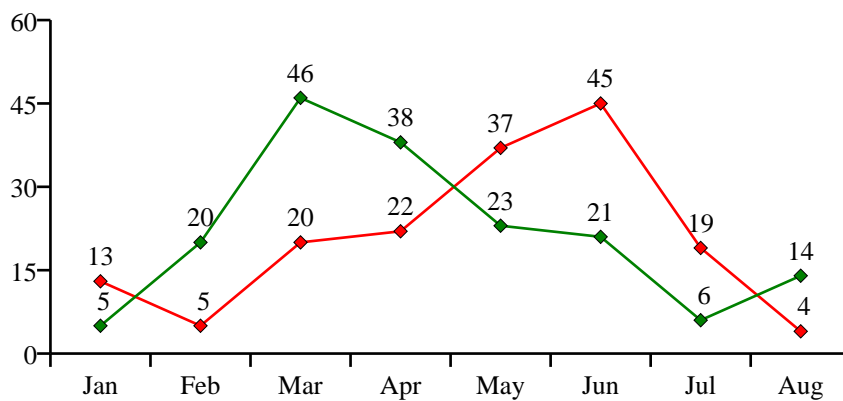

**sample1a( ... )***Example*

```
def sample1a():
    drawing = Drawing(400, 200)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (5, 20, 46, 38, 23, 21, 6, 14)
    ]

    lc = SampleHorizontalLineChart()


    lc.x = 50
    lc.y = 50
    lc.height = 125
    lc.width = 300
    lc.data = data
    lc.joinedLines = 1
    lc.strokeColor = colors.white
    lc.fillColor = colors.HexColor(0xCCCCCC)
    lc.lines.symbol = makeMarker('FilledDiamond')
    lc.lineLabelFormat = '%2.0f'

    catNames = 'Jan Feb Mar Apr May Jun Jul Aug'.split(' ')
    lc.categoryAxis.categoryNames = catNames
    lc.categoryAxis.labels.boxAnchor = 'n'

    lc.valueAxis.valueMin = 0
    lc.valueAxis.valueMax = 60
    lc.valueAxis.valueStep = 15

    drawing.add(lc)

    return drawing
```

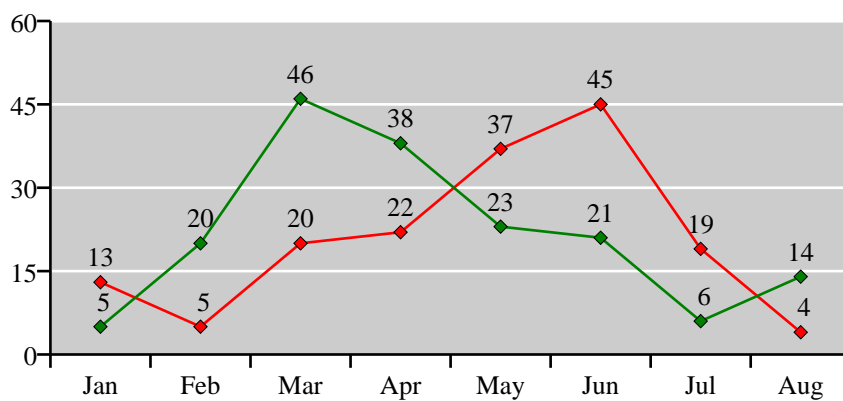



**sample2( ... )***Example*

```
def sample2():
    drawing = Drawing(400, 200)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (5, 20, 46, 38, 23, 21, 6, 14)
    ]

    lc = HorizontalLineChart()


    lc.x = 50
    lc.y = 50
    lc.height = 125
    lc.width = 300
    lc.data = data
    lc.joinedLines = 1
    lc.lines.symbol = makeMarker('Smiley')
    lc.lineLabelFormat = '%2.0f'
    lc.strokeColor = colors.black
    lc.fillColor = colors.lightblue

    catNames = 'Jan Feb Mar Apr May Jun Jul Aug'.split(' ')
    lc.categoryAxis.categoryNames = catNames
    lc.categoryAxis.labels.boxAnchor = 'n'

    lc.valueAxis.valueMin = 0
    lc.valueAxis.valueMax = 60
    lc.valueAxis.valueStep = 15

    drawing.add(lc)

    return drawing
```

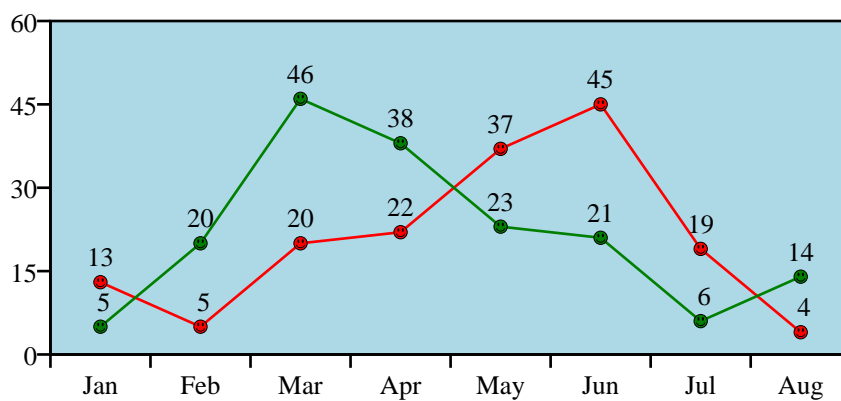

**sample3( ... )***Example*

```
def sample3():
    drawing = Drawing(400, 200)

    data = [
        (13, 5, 20, 22, 37, 45, 19, 4),
        (5, 20, 46, 38, 23, 21, 6, 14)
    ]

    lc = HorizontalLineChart()

    lc.x = 50
    lc.y = 50
    lc.height = 125
    lc.width = 300
    lc.data = data
    lc.joinedLines = 1
    lc.lineLabelFormat = '%2.0f'
    lc.strokeColor = colors.black


    lc.lines[0].symbol = makeMarker('Smiley')
    lc.lines[1].symbol = NoEntry
    lc.lines[0].strokeWidth = 2
    lc.lines[1].strokeWidth = 4

    catNames = 'Jan Feb Mar Apr May Jun Jul Aug'.split(' ')
    lc.categoryAxis.categoryNames = catNames
    lc.categoryAxis.labels.boxAnchor = 'n'

    lc.valueAxis.valueMin = 0
    lc.valueAxis.valueMax = 60
    lc.valueAxis.valueStep = 15

    drawing.add(lc)

    return drawing
```

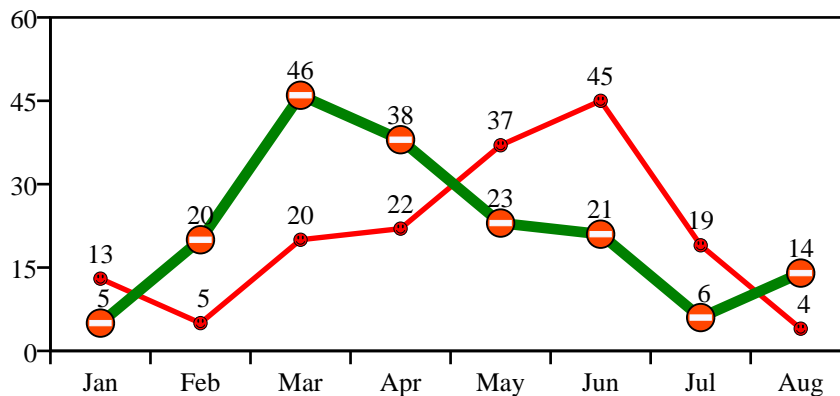

## slidebox

### Classes

#### **SlideBox(Widget)**

Returns a slidebox widget

#### **Public Attributes**

**background** Colour of the background to the drawing (if any)

**bottomPadding** Padding at bottom of drawing

**boxHeight** Height of the boxes

**boxOutlineColor** Colour used to outline the boxes (if any)

**boxOutlineWidth** Width of the box outline (if any)

**boxSpacing** Space between the boxes

**boxWidth** Width of the boxes

**endColor** Color of last box

**labelFillColor** Colour for number insides

**labelFontName** Name of font used for the labels

**labelFontSize** Size of font used for the labels

**labelStrokeColor** Colour for for number outlines

**leftPadding** Padding on left of drawing

**numberOfBoxes** How many boxes there are

**rightPadding** Padding on right of drawing

**sourceLabelFillColor** Colour ink for the 'source' label (bottom right)

**sourceLabelFontName** Name of font used for the 'source' label

**sourceLabelFontSize** Font size for the 'source' label

**sourceLabelOffset** Padding at bottom of drawing

**sourceLabelText** Text used for the 'source' label (can be empty)

**startColor** Color of first box

**topPadding** Padding at top of drawing

**triangleFillColor** Colour of indicator triangles

**triangleHeight** Height of indicator triangles

**trianglePosition** Which box is highlighted by the triangles

**triangleStrokeColor** Colour of indicator triangle outline

**triangleStrokeWidth** Colour of indicator triangle outline

**triangleWidth** Width of indicator triangles

#### *Example*

```
def demo(self,drawing=None):
```

```
from reportlab.lib import colors
if not drawing:
    tx,ty=self._getDrawingDimensions()
    drawing = Drawing(tx,ty)
drawing.add(self.draw())
return drawing
```



Source: ReportLab

### *Properties of Example Widget*

```
background = None
bottomPadding = 5
boxHeight = 15.590551181102363
boxOutlineColor = Color(0,0,0,1)
boxOutlineWidth = 0.58
boxSpacing = 2.1259842519685037
boxWidth = 20.69291338582677
endColor = Color(.098039,.301961,.529412,1)
labelFillColor = Color(1,1,1,1)
labelFontName = 'Helvetica-Bold'
labelFontSize = 10
labelStrokeColor = Color(0,0,0,1)
leftPadding = 5
numberOfBoxes = 7
rightPadding = 5
sourceLabelFillColor = Color(0,0,0,1)
sourceLabelFontName = 'Helvetica-Oblique'
sourceLabelFontSize = 6
sourceLabelOffset = 5.669291338582678
sourceLabelText = 'Source: ReportLab'
startColor = Color(.909804,.878431,.466667,1)
topPadding = 5
triangleFillColor = Color(1,1,1,1)
triangleHeight = 3.401574803149606
trianglePosition = 7
triangleStrokeColor = Color(0,0,0,1)
triangleStrokeWidth = 0.58
triangleWidth = 10.771653543307087
```

## spider

### Spider Chart

Normal use shows variation of 5-10 parameters against some 'norm' or target. When there is more than one series, place the series with the largest numbers first, as it will be overdrawn by each successive one.

## Classes

### SpiderChart (PlotArea)

#### Public Attributes

**background** Handle to background object e.g. Rect(0,0,width,height).

**data** Data to be plotted, list of (lists of) numbers.

**debug** Used only for debugging.

**direction** 'clockwise' or 'anticlockwise'

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**labels** optional list of labels to use for each data point

**spokeLabels** collection of spoke label descriptor objects

**spokes** collection of spoke descriptor objects

**startAngle** angle of first slice; like the compass, 0 is due North

**strandLabels** collection of strand label descriptor objects

**strands** collection of strand descriptor objects

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

#### Example

```
def demo(self):
    d = Drawing(200, 200)
    d.add(SpiderChart())
    return d
```



### *Properties of Example Widget*

```
background = None
data = [[10, 12, 14, 16, 14, 12], [6, 8, 10, 12, 9, 11]]
debug = 0
direction = 'clockwise'
fillColor = None
height = 180
labels = ['a', 'b', 'c', 'd', 'e', 'f']
spokeLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1629fd0>
spokes = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1629f80>
startAngle = 90
strandLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x162e058>
strands = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1629f30>
strokeColor = None
strokeWidth = 1
width = 180
x = 10
y = 10
```

## **SpokeLabel (WedgeLabel)**

### **Public Attributes**

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fontName** the name of the font used

**fontSize** the size of the font

**height** the height of the text

**leading**

**leftPadding** padding at left of box

**maxWidth** maximum width the label can grow to

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** the actual text to display

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x**

**y**

### *Example*

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""

    d = Drawing(200, 100)

    # mark the origin of the label
    d.add(Circle(100,90, 5, fillColor=colors.green))

    lab = Label()
    lab.setOrigin(100,90)
    lab.boxAnchor = 'ne'
    lab.angle = 45
    lab.dx = 0
    lab.dy = -20
    lab.boxStrokeColor = colors.green
```

```
lab.setText('Another\nMulti-Line\nString')
d.add(lab)

return d
```

### *Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
height = None
leading = None
leftPadding = 0
maxWidth = None
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```



## **StrandLabel ( SpokeLabel )**

### **Public Attributes**

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dR** radial shift for label

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fontName** the name of the font used

**fontSize** the size of the font

**format** Format for the label

**height** the height of the text

**leading**

**leftPadding** padding at left of box

**maxWidth** maximum width the label can grow to

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** the actual text to display

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x**

**y**

### *Example*

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""

    d = Drawing(200, 100)

    # mark the origin of the label
    d.add(Circle(100,90, 5, fillColor=colors.green))

    lab = Label()
    lab.setOrigin(100,90)
    lab.boxAnchor = 'ne'
```

```
lab.angle = 45
lab.dx = 0
lab.dy = -20
lab.boxStrokeColor = colors.green
lab.setText('Another\nMulti-Line\nString')
d.add(lab)

return d
```

### *Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dR = 0
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
format = ''
height = None
leading = None
leftPadding = 0
maxWidth = None
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```

## Functions

### `sample1( ... )`

Make a simple spider chart

#### *Example*

```
def sample1():
    "Make a simple spider chart"
    d = Drawing(400, 400)
    sp = SpiderChart()
    sp.x = 50
    sp.y = 50
    sp.width = 300
    sp.height = 300
    sp.data = [[10,12,14,16,14,12], [6,8,10,12,9,15],[7,8,17,4,12,8]]
    sp.labels = ['a','b','c','d','e','f']
    sp.strands[0].strokeColor = colors.cornsilk
    sp.strands[1].strokeColor = colors.cyan
    sp.strands[2].strokeColor = colors.palegreen
    sp.strands[0].fillColor = colors.cornsilk
    sp.strands[1].fillColor = colors.cyan
    sp.strands[2].fillColor = colors.palegreen
    sp.spokes.strokeDashArray = (2,2)
    d.add(sp)
    return d
```





**sample2( ... )**

Make a spider chart with markers, but no fill

*Example*

```
def sample2():
    "Make a spider chart with markers, but no fill"
    d = Drawing(400, 400)
    sp = SpiderChart()
    sp.x = 50
    sp.y = 50
    sp.width = 300
    sp.height = 300
    sp.data = [[10,12,14,16,14,12], [6,8,10,12,9,15],[7,8,17,4,12,8]]
    sp.labels = ['U','V','W','X','Y','Z']
    sp.strands.strokeWidth = 1
    sp.strands[0].fillColor = colors.pink
    sp.strands[1].fillColor = colors.lightblue
    sp.strands[2].fillColor = colors.palegreen
    sp.strands[0].strokeColor = colors.red
    sp.strands[1].strokeColor = colors.blue
    sp.strands[2].strokeColor = colors.green
    sp.strands.symbol = "FilledDiamond"
    sp.strands[1].symbol = makeMarker("Circle")
    sp.strands[1].symbol.strokeWidth = 0.5
    sp.strands[1].symbol.fillColor = colors.yellow
    sp.strands.symbolSize = 6
    sp.strandLabels[0,3]._text = 'special'
    sp.strandLabels[0,1]._text = 'one'
    sp.strandLabels[0,0]._text = 'zero'
    sp.strandLabels[1,0]._text = 'Earth'
    sp.strandLabels[2,2]._text = 'Mars'
    sp.strandLabels.format = 'values'
    sp.strandLabels.dR = -5
    d.add(sp)
    return d
```



## piecharts

Basic Pie Chart class.

This permits you to customize and pop out individual wedges;  
supports elliptical and circular pies.

## Classes

### **AbstractPieChart (PlotArea)**

#### **Public Attributes**

**background** Handle to background object e.g. Rect(0,0,width,height).

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

#### *Example*

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

#### *Properties of Example Widget*

```
background = None
debug = 0
fillColor = None
height = 85
strokeColor = None
strokeWidth = 1
width = 180
x = 20
y = 10
```

## **LegendedPie(Pie)**

Pie with a two part legend (one editable with swatches, one hidden without swatches).

### **Public Attributes**

**background** Handle to background object e.g. Rect(0,0,width,height).

**bottomPadding** Padding at bottom of drawing

**checkLabelOverlap** If true check and attempt to fix standard label overlaps(default off)

**data** list of numbers defining wedge sizes; need not sum to 1

**debug** Used only for debugging.

**direction** 'clockwise' or 'anticlockwise'

**drawLegend** If true then create and draw legend

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**labels** optional list of labels to use for each data point

**leftPadding** Padding on left of drawing

**legend1** Handle to legend for pie

**legendNumberFormat** Formatting routine for number on right hand side of legend.

**legendNumberOffset** Horizontal space between legend and numbers on r/hand side

**legend\_data** Numbers used on r/hand side of legend (or None)

**legend\_names** Names used in legend (or None)

**orderMode** None

**other\_threshold** A value for doing thresholding, not used yet.

**pieAndLegend\_colors** Colours used for both swatches and pie

**pointerLabelMode**

**rightPadding** Padding on right of drawing

**sameRadii** If true make x/y radii the same(default off)

**simpleLabels** If true(default) use String not super duper WedgeLabel

**slices** collection of wedge descriptor objects

**startAngle** angle of first slice; like the compass, 0 is due North

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**topPadding** Padding at top of drawing

**wedgeRecord** callable(wedge,\*args,\*\*kws)

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xradius** X direction Radius

**y** Y position of the lower-left corner of the chart.

**yradius** Y direction Radius



*Example*

```
def demo(self, drawing=None):
    if not drawing:
        tx,ty = self._getDrawingDimensions()
        drawing = Drawing(tx, ty)
        drawing.add(self.draw())
    return drawing
```

*Properties of Example Widget*

```
background = None
bottomPadding = 5
checkLabelOverlap = 0
data = [38.4, 20.7, 18.9, 15.4, 6.6]
debug = 0
direction = 'clockwise'
drawLegend = 1
fillColor = None
height = 100
labels = None
leftPadding = 5
legend1.alignment = 'right'
legend1.autoXPadding = 5
legend1.autoYPadding = 2
legend1.boxAnchor = 'nw'
legend1.colEndCallout = None
legend1.colorNamePairs = [(Color(1,0,0,1), 'red'),
                           (Color(0,0,1,1), 'blue'),
                           (Color(0,.501961,0,1), 'green'),
                           (Color(1,.752941,.796078,1), 'pink'),
                           (Color(1,1,0,1), 'yellow'),
                           (PCMYKColor(11,11,72,0,spotName='PANTONE 458 CV',alpha=100), 'AAA:'),
                           (PCMYKColor(100,65,0,30,spotName='PANTONE 288 CV',alpha=100), 'AA:'),
                           (PCMYKColor(11,11,72,0,spotName='PANTONE 458 CV',density=75,alpha=100), 'A:'),
                           (PCMYKColor(100,65,0,30,spotName='PANTONE 288 CV',density=75,alpha=100),
                            'BBB:'),
                           (PCMYKColor(11,11,72,0,spotName='PANTONE 458 CV',density=50,alpha=100),
                            'NR:')]
legend1.columnMaximum = 7
legend1.deltax = 5.67
legend1.deltay = 14.17
legend1.dividerColor = Color(0,0,0,1)
legend1.dividerDashArray = None
legend1.dividerLines = 0
legend1.dividerOffsX = (0, 0)
legend1.dividerOffsY = 0
legend1.dividerWidth = 0.5
legend1.dx = 5.67
legend1.dxDTextSpace = 11.39
legend1.dy = 5.67
legend1.fillColor = Color(0,0,0,1)
legend1.fontName = 'Helvetica-Bold'
legend1.fontSize = 6
legend1.strokeColor = Color(0,0,0,1)
legend1.strokeWidth = 0.5
legend1.subCols = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1650828>
legend1.swatchMarker = None
legend1.swdx = 0
legend1.swdy = 0
legend1.variColumn = 0
legend1.x = 117
legend1.y = 100
legend1.yGap = 0
legendNumberFormat = '%.1f%%'
legendNumberOffset = 51
legend_data = [38.4, 20.7, 18.9, 15.4, 6.6]
legend_names = ['AAA:', 'AA:', 'A:', 'BBB:', 'NR:']
orderMode = 'fixed'
pieAndLegend_colors = [PCMYKColor(11,11,72,0,spotName='PANTONE 458 CV',alpha=100),
                        PCMYKColor(100,65,0,30,spotName='PANTONE 288 CV',alpha=100),
                        PCMYKColor(11,11,72,0,spotName='PANTONE 458 CV',density=75,alpha=100),
                        PCMYKColor(100,65,0,30,spotName='PANTONE 288 CV',density=75,alpha=100),
                        PCMYKColor(11,11,72,0,spotName='PANTONE 458 CV',density=50,alpha=100),
```

```
PCMYKColor(100,65,0,30,spotName='PANTONE 288 CV',density=50,alpha=100)]
pointerLabelMode = None
rightPadding = 5
sameRadii = False
simpleLabels = 1
slices = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x16505a8>
startAngle = 90
strokeColor = None
strokeWidth = 1
topPadding = 5
width = 100
x = 0
xradius = None
y = 0
yradius = None
```

## Pie(**AbstractPieChart**)

### Public Attributes

**background** Handle to background object e.g. Rect(0,0,width,height).

**checkLabelOverlap** If true check and attempt to fix standard label overlaps(default off)

**data** list of numbers defining wedge sizes; need not sum to 1

**debug** Used only for debugging.

**direction** 'clockwise' or 'anticlockwise'

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**labels** optional list of labels to use for each data point

**orderMode** None

**other\_threshold** A value for doing thresholding, not used yet.

**pointerLabelMode**

**sameRadii** If true make x/y radii the same(default off)

**simpleLabels** If true(default) use String not super duper WedgeLabel

**slices** collection of wedge descriptor objects

**startAngle** angle of first slice; like the compass, 0 is due North

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**wedgeRecord** callable(wedge,\*args,\*\*kwds)

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xradius** X direction Radius

**y** Y position of the lower-left corner of the chart.

**yradius** Y direction Radius

### Example

```
def demo(self):
    d = Drawing(200, 100)

    pc = Pie()
    pc.x = 50
    pc.y = 10
    pc.width = 100
    pc.height = 80
    pc.data = [10,20,30,40,50,60]
    pc.labels = ['a','b','c','d','e','f']

    pc.slices.strokeWidth=0.5
    pc.slices[3].popout = 10
    pc.slices[3].strokeWidth = 2
    pc.slices[3].strokeDashArray = [2,2]
    pc.slices[3].labelRadius = 1.75
    pc.slices[3].fontColor = colors.red
    pc.slices[0].fillColor = colors.darkcyan
    pc.slices[1].fillColor = colors.blueviolet
    pc.slices[2].fillColor = colors.blue
    pc.slices[3].fillColor = colors.cyan
    pc.slices[4].fillColor = colors.aquamarine
```

```
pc.slices[5].fillColor = colors.cadetblue
pc.slices[6].fillColor = colors.lightcoral

d.add(pc)
return d
```

### *Properties of Example Widget*

```
background = None
checkLabelOverlap = 0
data = [1, 2.3, 1.7, 4.2]
debug = 0
direction = 'clockwise'
fillColor = None
height = 100
labels = None
orderMode = 'fixed'
pointerLabelMode = None
sameRadii = False
simpleLabels = 1
slices = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1655ad0>
startAngle = 90
strokeColor = None
strokeWidth = 1
width = 100
x = 0
xradius = None
y = 0
yradius = None
```

## Pie3d(Pie)

### Public Attributes

**angle\_3d** The view angle.

**background** Handle to background object e.g. Rect(0,0,width,height).

**checkLabelOverlap** If true check and attempt to fix standard label overlaps(default off)

**data** list of numbers defining wedge sizes; need not sum to 1

**debug** Used only for debugging.

**depth\_3d** depth of the pie.

**direction** 'clockwise' or 'anticlockwise'

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**labels** optional list of labels to use for each data point

**orderMode** None

**other\_threshold** A value for doing thresholding, not used yet.

**perspective** A flattening parameter.

**pointerLabelMode**

**sameRadii** If true make x/y radii the same(default off)

**simpleLabels** If true(default) use String not super duper WedgeLabel

**slices** collection of wedge descriptor objects

**startAngle** angle of first slice; like the compass, 0 is due North

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**wedgeRecord** callable(wedge,\*args,\*\*kws)

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xradius** X direction Radius

**y** Y position of the lower-left corner of the chart.

**yradius** Y direction Radius

### Example

```
def demo(self):
    d = Drawing(200, 100)

    pc = Pie()
    pc.x = 50
    pc.y = 10
    pc.width = 100
    pc.height = 80
    pc.data = [10,20,30,40,50,60]
    pc.labels = ['a','b','c','d','e','f']

    pc.slices.strokeWidth=0.5
    pc.slices[3].popout = 10
    pc.slices[3].strokeWidth = 2
    pc.slices[3].strokeDashArray = [2,2]
    pc.slices[3].labelRadius = 1.75
```

```
pc.slices[3].fontColor = colors.red
pc.slices[0].fillColor = colors.darkcyan
pc.slices[1].fillColor = colors.blueviolet
pc.slices[2].fillColor = colors.blue
pc.slices[3].fillColor = colors.cyan
pc.slices[4].fillColor = colors.aquamarine
pc.slices[5].fillColor = colors.cadetblue
pc.slices[6].fillColor = colors.lightcoral
self.slices[1].visible = 0
self.slices[3].visible = 1
self.slices[4].visible = 1
self.slices[5].visible = 1
self.slices[6].visible = 0

d.add(pc)
return d
```

### *Properties of Example Widget*

```
checkLabelOverlap = 0
data = [12.5, 20.1, 2.0, 22.0, 5.0, 18.0, 13.0]
direction = 'clockwise'
height = 200
labels = None
simpleLabels = 1
slices = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x165d558>
startAngle = 90
width = 300
x = 0
xradius = None
y = 0
yradius = None
```

## **WedgeLabel (Label)**

### **Public Attributes**

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fontName** the name of the font used

**fontSize** the size of the font

**height** the height of the text

**leading**

**leftPadding** padding at left of box

**maxWidth** maximum width the label can grow to

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** the actual text to display

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x**

**y**

### *Example*

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""

    d = Drawing(200, 100)

    # mark the origin of the label
    d.add(Circle(100,90, 5, fillColor=colors.green))

    lab = Label()
    lab.setOrigin(100,90)
    lab.boxAnchor = 'ne'
    lab.angle = 45
    lab.dx = 0
    lab.dy = -20
    lab.boxStrokeColor = colors.green
```

```
lab.setText('Another\nMulti-Line\nString')
d.add(lab)

return d
```

### *Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
height = None
leading = None
leftPadding = 0
maxWidth = None
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```



## Functions

### `sample0a( ... )`

Make a degenerated pie chart with only one slice.

#### *Example*


```
def sample0a():
    "Make a degenerated pie chart with only one slice."

    d = Drawing(400, 200)

    pc = Pie()
    pc.x = 150
    pc.y = 50
    pc.data = [10]
    pc.labels = ['a']
    pc.slices.strokeWidth=1#0.5

    d.add(pc)

    return d
```




**sample0b( ... )**

Make a degenerated pie chart with only one slice.

*Example*

```
def sample0b():  
    "Make a degenerated pie chart with only one slice."  
  
    d = Drawing(400, 200)  
  
    pc = Pie()  
    pc.x = 150  
    pc.y = 50  
    pc.width = 120  
    pc.height = 100  
    pc.data = [10]  
    pc.labels = ['a']  
    pc.slices.strokeWidth=1#0.5  
  
    d.add(pc)  
  
    return d
```



**sample1( ... )**

Make a typical pie chart with with one slice treated in a special way.

*Example*

```
def sample1():
    "Make a typical pie chart with with one slice treated in a special way."


    d = Drawing(400, 200)

    pc = Pie()
    pc.x = 150
    pc.y = 50
    pc.data = [10, 20, 30, 40, 50, 60]
    pc.labels = ['a', 'b', 'c', 'd', 'e', 'f']

    pc.slices.strokeWidth=1#0.5
    pc.slices[3].popout = 20
    pc.slices[3].strokeWidth = 2
    pc.slices[3].strokeDashArray = [2,2]
    pc.slices[3].labelRadius = 1.75
    pc.slices[3].fontColor = colors.red

    d.add(pc)

    return d
```

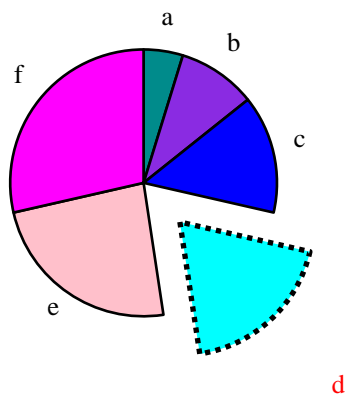

**sample2( ... )**

Make a pie chart with nine slices.

*Example*

```
def sample2():
    "Make a pie chart with nine slices."

    d = Drawing(400, 200)


    pc = Pie()
    pc.x = 125
    pc.y = 25
    pc.data = [0.31, 0.148, 0.108,
               0.076, 0.033, 0.03,
               0.019, 0.126, 0.15]
    pc.labels = ['1', '2', '3', '4', '5', '6', '7', '8', 'X']

    pc.width = 150
    pc.height = 150
    pc.slices.strokeWidth=1#0.5

    pc.slices[0].fillColor = colors.steelblue
    pc.slices[1].fillColor = colors.thistle
    pc.slices[2].fillColor = colors.cornflower
    pc.slices[3].fillColor = colors.lightsteelblue
    pc.slices[4].fillColor = colors.aquamarine
    pc.slices[5].fillColor = colors.cadetblue
    pc.slices[6].fillColor = colors.lightcoral
    pc.slices[7].fillColor = colors.tan
    pc.slices[8].fillColor = colors.darkseagreen

    d.add(pc)

    return d
```

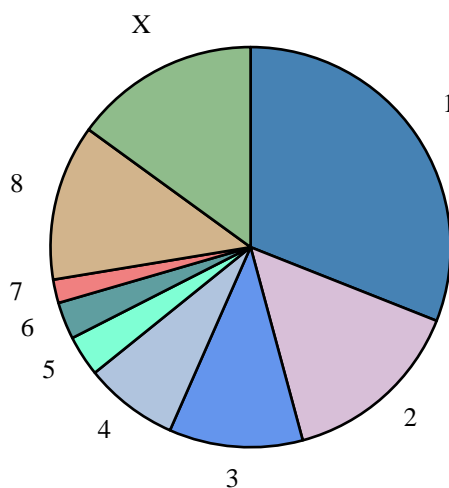

**sample3( ... )**

Make a pie chart with a very slim slice.

*Example*

```
def sample3():
    "Make a pie chart with a very slim slice."

    d = Drawing(400, 200)


    pc = Pie()
    pc.x = 125
    pc.y = 25

    pc.data = [74, 1, 25]

    pc.width = 150
    pc.height = 150
    pc.slices.strokeWidth=1#0.5
    pc.slices[0].fillColor = colors.steelblue
    pc.slices[1].fillColor = colors.thistle
    pc.slices[2].fillColor = colors.cornflower

    d.add(pc)

    return d
```

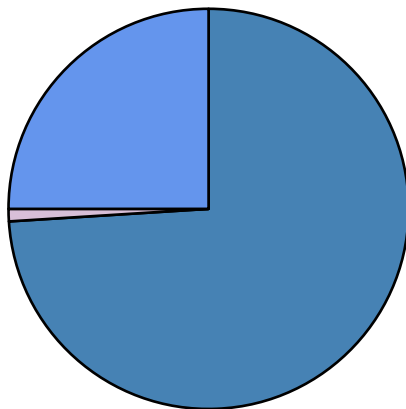

**sample4( ... )**

Make a pie chart with several very slim slices.

*Example*

```
def sample4():
    "Make a pie chart with several very slim slices."

    d = Drawing(400, 200)


    pc = Pie()
    pc.x = 125
    pc.y = 25

    pc.data = [74, 1, 1, 1, 1, 22]

    pc.width = 150
    pc.height = 150
    pc.slices.strokeWidth=1#0.5
    pc.slices[0].fillColor = colors.steelblue
    pc.slices[1].fillColor = colors.thistle
    pc.slices[2].fillColor = colors.cornflower
    pc.slices[3].fillColor = colors.lightsteelblue
    pc.slices[4].fillColor = colors.aquamarine
    pc.slices[5].fillColor = colors.cadetblue

    d.add(pc)

    return d
```

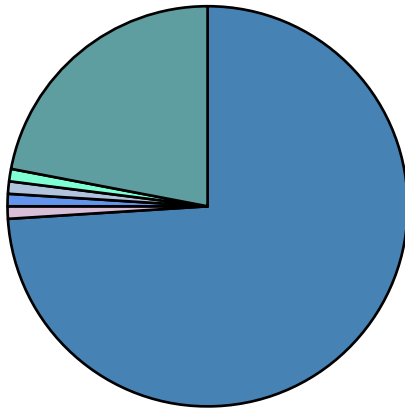

## dotbox

### Classes

#### DotBox(Widget)

Returns a dotbox widget.

#### Public Attributes

**dotColor** Colour of the circle on the box

**dotDiameter** Diameter of the circle used for the 'dot'

**dotXPosition** X Position of the circle

**dotYPosition** Y Position of the circle

**gridColor** Colour for the box and gridding

**gridDivWidth** Width of each 'box'

**labelFontName** Name of font used for the labels

**labelFontSize** Size of font used for the labels

**labelOffset** Space between label text and grid edge

**strokeWidth** Width of the grid and dot outline

**x** X Position of dotbox

**xlabels** List of text labels for boxes on left hand side

**y** Y Position of dotbox

**ylabels** Text label for second box on left hand side

#### Example

```
def demo(self,drawing=None):
    if not drawing:
        tx,ty=self._getDrawingDimensions()
        drawing = Drawing(tx,ty)
        drawing.add(self.draw())
    return drawing
```



#### Properties of Example Widget

```
dotColor = Color(.909804,.878431,.466667,1)
dotDiameter = 11.338582677165356
dotXPosition = 1
dotYPosition = 1
gridColor = Color(.098039,.301961,.529412,1)
gridDivWidth = 14.173228346456693
labelFontName = 'Helvetica'
labelFontSize = 6
```

```
labelOffset = 5
strokeWidth = 0.5
x = 30
xlabels = ['Value', 'Blend', 'Growth']
y = 5
ylabels = ['Small', 'Medium', 'Large']
```



## doughnut

Doughnut chart

Produces a circular chart like the doughnut charts produced by Excel.  
Can handle multiple series (which produce concentric 'rings' in the chart).

## Classes

### Doughnut (AbstractPieChart)

#### Public Attributes

**data** list of numbers defining sector sizes; need not sum to 1

**direction** 'clockwise' or 'anticlockwise'

**height** height of doughnut bounding box. Need not be same as height.

**labels** optional list of labels to use for each data point

**simpleLabels** If true(default) use String not super duper WedgeLabel

**slices** collection of sector descriptor objects

**startAngle** angle of first slice; like the compass, 0 is due North

**width** width of doughnut bounding box. Need not be same as width.

**x** X position of the chart within its container.

**y** Y position of the chart within its container.


#### Example

```
def demo(self):
    d = Drawing(200, 100)

    dn = Doughnut()
    dn.x = 50
    dn.y = 10
    dn.width = 100
    dn.height = 80
    dn.data = [10,20,30,40,50,60]
    dn.labels = ['a','b','c','d','e','f']

    dn.slices.strokeWidth=0.5
    dn.slices[3].popout = 10
    dn.slices[3].strokeWidth = 2
    dn.slices[3].strokeDashArray = [2,2]
    dn.slices[3].labelRadius = 1.75
    dn.slices[3].fontColor = colors.red
    dn.slices[0].fillColor = colors.darkcyan
    dn.slices[1].fillColor = colors.blueviolet
    dn.slices[2].fillColor = colors.blue
    dn.slices[3].fillColor = colors.cyan
    dn.slices[4].fillColor = colors.aquamarine
    dn.slices[5].fillColor = colors.cadetblue
    dn.slices[6].fillColor = colors.lightcoral

    d.add(dn)
    return d
```



### *Properties of Example Widget*

```
data = [1, 1]
direction = 'clockwise'
height = 100
labels = None
simpleLabels = 1
slices = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x175eb20>
startAngle = 90
width = 100
x = 0
y = 0
```

## Functions

### **sample1( ... )**

Make up something from the individual Sectors

#### *Example*

```
def sample1():
    "Make up something from the individual Sectors"

    d = Drawing(400, 400)
    g = Group()

    s1 = Wedge(centerx=200, centery=200, radius=150, startangleddegrees=0, endangleddegrees=120, radius=150)
    s1.fillColor=colors.red
    s1.strokeColor=None
    d.add(s1)
    s2 = Wedge(centerx=200, centery=200, radius=150, startangleddegrees=120, endangleddegrees=240, radius=150)
    s2.fillColor=colors.green
    s2.strokeColor=None
    d.add(s2)
    s3 = Wedge(centerx=200, centery=200, radius=150, startangleddegrees=240, endangleddegrees=260, radius=150)
    s3.fillColor=colors.blue
    s3.strokeColor=None
    d.add(s3)
    s4 = Wedge(centerx=200, centery=200, radius=150, startangleddegrees=260, endangleddegrees=360, radius=150)
    s4.fillColor=colors.gray
    s4.strokeColor=None
    d.add(s4)

    return d
```



**sample2( ... )**

Make a simple demo

*Example*

```
def sample2():  
    "Make a simple demo"  
  
    d = Drawing(400, 400)  
  
    dn = Doughnut()  
    dn.x = 50  
    dn.y = 50  
    dn.width = 300  
    dn.height = 300  
    dn.data = [10,20,30,40,50,60]  
  
    d.add(dn)  
  
    return d
```




**sample3( ... )**

Make a more complex demo

*Example*

```
def sample3():  
    "Make a more complex demo"  
  
    d = Drawing(400, 400)  
    dn = Doughnut()  
    dn.x = 50  
    dn.y = 50  
    dn.width = 300  
    dn.height = 300  
    dn.data = [[10,20,30,40,50,60], [10,20,30,40]]  
    dn.labels = ['a','b','c','d','e','f']  
  
    d.add(dn)  
  
    return d
```

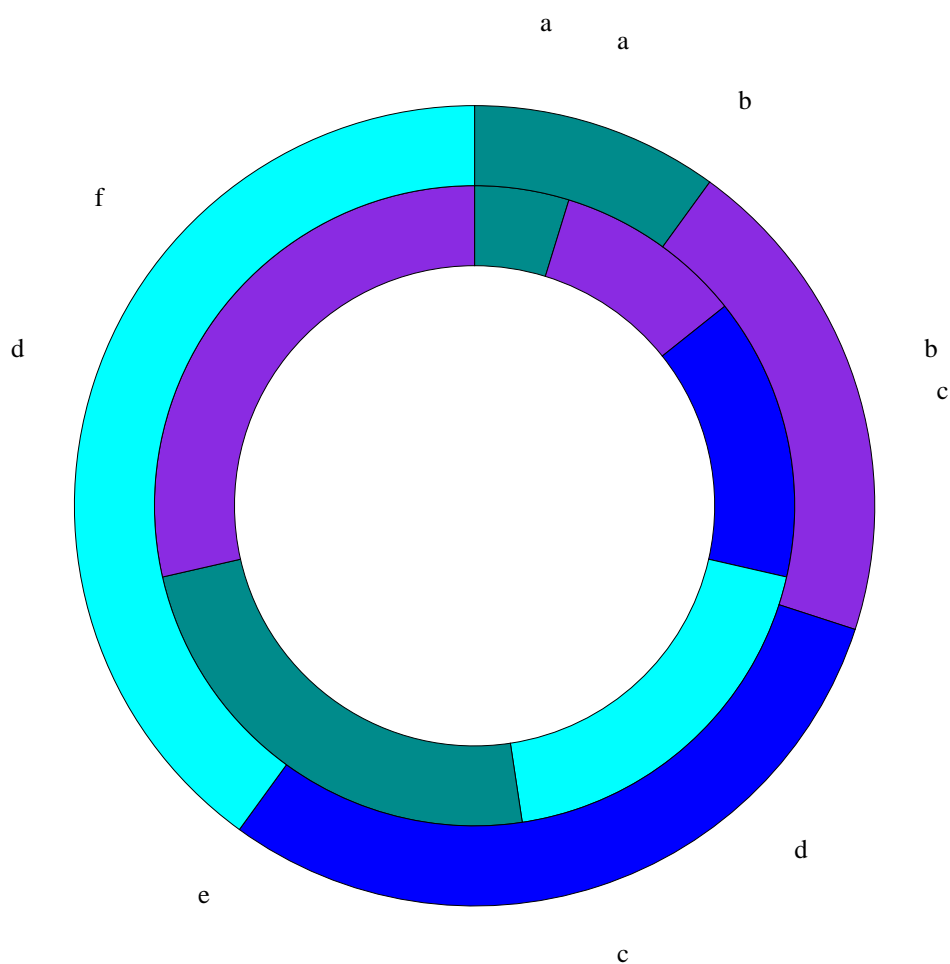

## lineplots

This module defines a very preliminary Line Plot example.

### Classes

#### AreaLinePlot(LinePlot)

we're given data in the form [(X1,Y11,...Y1M)....(Xn,Yn1,...YnM)]

#### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**behindAxes** If true use separate line group.

**data** Data to be plotted, list of (lists of) x/y tuples.

**debug** Used only for debugging.

**fillColor** Color used for background interior of plot area.

**gridFirst** If true use draw grids before axes.

**height** Height of the chart.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color used for background border of plot area.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xValueAxis** Handle of the x axis.

**y** Y position of the lower-left corner of the chart.

**yValueAxis** Handle of the y axis.

#### Example

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()
    lp.x = 50
```

```
lp.y = 50
lp.height = 125
lp.width = 300
lp.data = data
lp.joinedLines = 1
lp.lineLabelFormat = '%2.0f'
lp.strokeColor = colors.black

lp.lines[0].strokeColor = colors.red
lp.lines[0].symbol = makeMarker('FilledCircle')
lp.lines[1].strokeColor = colors.blue
lp.lines[1].symbol = makeMarker('FilledDiamond')

lp.xValueAxis.valueMin = 0
lp.xValueAxis.valueMax = 5
lp.xValueAxis.valueStep = 1

lp.yValueAxis.valueMin = 0
lp.yValueAxis.valueMax = 7
lp.yValueAxis.valueStep = 1

drawing.add(lp)

return drawing
```



### *Properties of Example Widget*

```
annotations = []
background = None
behindAxes = 0
data = [(1, 20, 100, 30), (2, 11, 50, 15), (3, 15, 70, 40)]
debug = 0
fillColor = None
gridFirst = 0
height = 85
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1791ee0>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1791e40>
reversePlotOrder = 1
strokeColor = None
strokeWidth = 1
width = 180
x = 20
xValueAxis.abf_ignore_zero = False
xValueAxis.avoidBoundFrac = None
xValueAxis.avoidBoundSpace = None
xValueAxis.drawGridLast = False
xValueAxis.forceZero = 0
xValueAxis.gridEnd = None
```



```
xValueAxis.gridStart = None
xValueAxis.gridStrokeColor = Color(0,0,0,1)
xValueAxis.gridStrokeDashArray = None
xValueAxis.gridStrokeLineCap = 0
xValueAxis.gridStrokeLineJoin = 0
xValueAxis.gridStrokeMiterLimit = 10
xValueAxis.gridStrokeWidth = 0.25
xValueAxis.hilLen = 0
xValueAxis.joinAxis = None
xValueAxis.joinAxisMode = None
xValueAxis.joinAxisPos = None
xValueAxis.keepTickLabelsInside = 0
xValueAxis.labelAxisMode = 'axis'
xValueAxis.labelTextFormat = None
xValueAxis.labelTextPostFormat = None
xValueAxis.labelTextScale = None
xValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1791c10>
xValueAxis.loLLen = 0
xValueAxis.maximumTicks = 7
xValueAxis.minimumTickSpacing = 10
xValueAxis.origShiftIPC = None
xValueAxis.origShiftMin = None
xValueAxis.origShiftSpecialValue = None
xValueAxis.rangeRound = 'none'
xValueAxis.reverseDirection = 0
xValueAxis.skipEndL = 'none'
xValueAxis.strokeColor = Color(0,0,0,1)
xValueAxis.strokeDashArray = None
xValueAxis.strokeLineCap = 0
xValueAxis.strokeLineJoin = 0
xValueAxis.strokeMiterLimit = 10
xValueAxis.strokeWidth = 1
xValueAxis.style = 'normal'
xValueAxis.subGridEnd = None
xValueAxis.subGridStart = None
xValueAxis.subGridStrokeColor = Color(0,0,0,1)
xValueAxis.subGridStrokeDashArray = None
xValueAxis.subGridStrokeLineCap = 0
xValueAxis.subGridStrokeLineJoin = 0
xValueAxis.subGridStrokeMiterLimit = 10
xValueAxis.subGridStrokeWidth = 0.25
xValueAxis.subTickHi = 0
xValueAxis.subTickLo = 0
xValueAxis.subTickNum = 0
xValueAxis.tickAxisMode = 'axis'
xValueAxis.tickDown = 5
xValueAxis.tickUp = 0
xValueAxis.valueMax = None
xValueAxis.valueMin = None
xValueAxis.valueStep = None
xValueAxis.visible = 1
xValueAxis.visibleAxis = 1
xValueAxis.visibleGrid = 0
xValueAxis.visibleLabels = 1
xValueAxis.visibleSubGrid = 0
xValueAxis.visibleSubTicks = 0
xValueAxis.visibleTicks = 1
xValueAxis.zrangePref = 0
y = 10
yValueAxis.abf_ignore_zero = False
yValueAxis.avoidBoundFrac = None
yValueAxis.avoidBoundSpace = None
yValueAxis.drawGridLast = False
yValueAxis.forceZero = 0
yValueAxis.gridEnd = None
yValueAxis.gridStart = None
yValueAxis.gridStrokeColor = Color(0,0,0,1)
yValueAxis.gridStrokeDashArray = None
yValueAxis.gridStrokeLineCap = 0
yValueAxis.gridStrokeLineJoin = 0
yValueAxis.gridStrokeMiterLimit = 10
yValueAxis.gridStrokeWidth = 0.25
yValueAxis.hilLen = 0
yValueAxis.joinAxis = None
yValueAxis.joinAxisMode = None
yValueAxis.joinAxisPos = None
yValueAxis.keepTickLabelsInside = 0
yValueAxis.labelAxisMode = 'axis'
yValueAxis.labelTextFormat = None
```

```
yValueAxis.labelTextPostFormat = None
yValueAxis.labelTextScale = None
yValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1791df0>
yValueAxis.loLLen = 0
yValueAxis.maximumTicks = 7
yValueAxis.minimumTickSpacing = 10
yValueAxis.origShiftIPC = None
yValueAxis.origShiftMin = None
yValueAxis.origShiftSpecialValue = None
yValueAxis.rangeRound = 'none'
yValueAxis.reverseDirection = 0
yValueAxis.skipEndL = 'none'
yValueAxis.strokeColor = Color(0,0,0,1)
yValueAxis.strokeDashArray = None
yValueAxis.strokeLineCap = 0
yValueAxis.strokeLineJoin = 0
yValueAxis.strokeMiterLimit = 10
yValueAxis.strokeWidth = 1
yValueAxis.style = 'normal'
yValueAxis.subGridEnd = None
yValueAxis.subGridStart = None
yValueAxis.subGridStrokeColor = Color(0,0,0,1)
yValueAxis.subGridStrokeDashArray = None
yValueAxis.subGridStrokeLineCap = 0
yValueAxis.subGridStrokeLineJoin = 0
yValueAxis.subGridStrokeMiterLimit = 10
yValueAxis.subGridStrokeWidth = 0.25
yValueAxis.subTickHi = 0
yValueAxis.subTickLo = 0
yValueAxis.subTickNum = 0
yValueAxis.tickAxisMode = 'axis'
yValueAxis.tickLeft = 5
yValueAxis.tickRight = 0
yValueAxis.valueMax = None
yValueAxis.valueMin = None
yValueAxis.valueStep = None
yValueAxis.visible = 1
yValueAxis.visibleAxis = 1
yValueAxis.visibleGrid = 0
yValueAxis.visibleLabels = 1
yValueAxis.visibleSubGrid = 0
yValueAxis.visibleSubTicks = 0
yValueAxis.visibleTicks = 1
yValueAxis.zrangePref = 0
```

## GridLinePlot(LinePlot)

A customized version of LinePlot.

It uses NormalDateXValueAxis() and AdjYValueAxis() for the X and Y axes.

The chart has a default grid background with thin horizontal lines aligned with the tickmarks (and labels). You can change the background to be any Grid or ShadedRect, or scale the whole chart.

If you do provide a background, you can specify the colours of the stripes with 'background.stripeColors'.

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Background for chart area (now Grid or ShadedRect).

**behindAxes** If true use separate line group.

**data** Data to be plotted, list of (lists of) x/y tuples.

**debug** Used only for debugging.

**fillColor** Color used for background interior of plot area.

**gridFirst** If true use draw grids before axes.

**height** Height of the chart.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**scaleFactor** Scalefactor to apply to whole drawing.

**strokeColor** Color used for background border of plot area.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xValueAxis** Handle of the x axis.

**y** Y position of the lower-left corner of the chart.

**yValueAxis** Handle of the y axis.

### Example

```
def demo(self,drawing=None):
    from reportlab.lib import colors
    if not drawing:
        drawing = Drawing(400, 200)
    lp = AdjLinePlot()
    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = _monthlyIndexData
    lp.joinedLines = 1
```

```
lp.strokeColor = colors.black
c0 = colors.PCMYKColor(100,65,0,30, spotName='PANTONE 288 CV', density=100)
lp.lines[0].strokeColor = c0
lp.lines[0].strokeWidth = 2
lp.lines[0].strokeDashArray = None
c1 = colors.PCMYKColor(0,79,91,0, spotName='PANTONE Wm Red CV', density=100)
lp.lines[1].strokeColor = c1
lp.lines[1].strokeWidth = 1
lp.lines[1].strokeDashArray = [3,1]
lp.xValueAxis.labels.fontSize = 10
lp.xValueAxis.labels.textAnchor = 'start'
lp.xValueAxis.labels.boxAnchor = 'w'
lp.xValueAxis.labels.angle = -45
lp.xValueAxis.labels.dx = 0
lp.xValueAxis.labels.dy = -8
lp.xValueAxis.xLabelFormat = '{mm}/{yy}'
lp.yValueAxis.labelTextFormat = '%5d%% '
lp.yValueAxis.tickLeft = 5
lp.yValueAxis.labels.fontSize = 10
lp.background = Grid()
lp.background.stripeColors = [colors.pink, colors.lightblue]
lp.background.orientation = 'vertical'
drawing.add(lp,'plot')
return drawing
```

### *Properties of Example Widget*

```
annotations = []
background.delta = 20
background.delta0 = 0
background.deltaSteps = []
background.fillColor = Color(1,1,1,1)
background.height = 100
background.orientation = 'horizontal'
background.stripeColors = [Color(1,0,0,1), Color(0,.501961,0,1), Color(0,0,1,1)]
background.strokeColor = Color(0,0,0,1)
background.strokeWidth = 0.5
background.useLines = 1
background.useRects = 0
background.width = 100
background.x = 0
background.y = 0
behindAxes = 0
data = [(19971202, 100.0),
        (19971231, 100.1704367),
        (19980131, 101.5639577),
        (19980228, 102.1879927),
        (19980331, 101.6337257),
        (19980430, 102.7640446),
        (19980531, 102.9198038),
        (19980630, 103.2593879),
        (19980731, 103.2516421),
        (19980831, 105.4744329),
        (19980930, 109.3242705),
        (19981031, 111.9859291),
        (19981130, 110.9184642),
        (19981231, 110.9184642),
        (19990131, 111.9882532),
        (19990228, 109.7912614),
        (19990331, 110.2418963),
        (19990430, 110.4279321),
        (19990531, 109.3395547),
        (19990630, 108.2341748),
        (19990731, 110.2129447),
        (19990831, 110.9683062),
        (19990930, 112.4425371),
        (19991031, 112.7314032),
        (19991130, 112.3509645),
        (19991231, 112.3660659),
        (20000131, 110.9255248),
        (20000229, 110.5266306),
        (20000331, 113.3116101),
        (20000430, 111.0449133),
        (20000531, 111.702717),
        (20000630, 113.5832178)],
        [(19971202, 100.0),
```

```
(19971231, 100.0),
(19980131, 100.8),
(19980228, 102.0),
(19980331, 101.9),
(19980430, 103.0),
(19980531, 103.0),
(19980630, 103.1),
(19980731, 103.1),
(19980831, 102.8),
(19980930, 105.6),
(19981031, 108.3),
(19981130, 108.1),
(19981231, 111.9),
(19990131, 113.1),
(19990228, 110.2),
(19990331, 111.8),
(19990430, 112.3),
(19990531, 110.1),
(19990630, 109.3),
(19990731, 111.2),
(19990831, 111.7),
(19990930, 112.6),
(19991031, 113.2),
(19991130, 113.9),
(19991231, 115.4),
(20000131, 112.7),
(20000229, 113.9),
(20000331, 115.8),
(20000430, 112.2),
(20000531, 112.6),
(20000630, 114.6)]]
debug = 0
fillColor = None
gridFirst = 0
height = 85
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1723490>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17233f0>
reversePlotOrder = 0
scaleFactor = None
strokeColor = None
strokeWidth = 1
width = 180
x = 20
xValueAxis.abf_ignore_zero = False
xValueAxis.avoidBoundFrac = None
xValueAxis.avoidBoundSpace = None
xValueAxis.bottomAxisLabelSlack = 0.1
xValueAxis.dailyFreq = 0
xValueAxis.dayOfWeekName = ['Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'Sunday']
xValueAxis.drawGridLast = False
xValueAxis.forceDatesEachYear = []
xValueAxis.forceEndDate = 0
xValueAxis.forceFirstDate = 0
xValueAxis.forceZero = 0
xValueAxis.gridEnd = None
xValueAxis.gridStart = None
xValueAxis.gridStrokeColor = Color(0,0,0,1)
xValueAxis.gridStrokeDashArray = None
xValueAxis.gridStrokeLineCap = 0
xValueAxis.gridStrokeLineJoin = 0
xValueAxis.gridStrokeMiterLimit = 10
xValueAxis.gridStrokeWidth = 0.25
xValueAxis.hiLLen = 0
xValueAxis.joinAxis = None
xValueAxis.joinAxisMode = None
xValueAxis.joinAxisPos = None
xValueAxis.keepTickLabelsInside = 0
xValueAxis.labelAxisMode = 'axis'
xValueAxis.labelTextFormat = None
xValueAxis.labelTextPostFormat = None
xValueAxis.labelTextScale = None
xValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1723508>
xValueAxis.loLLen = 0
xValueAxis.maximumTicks = 7
xValueAxis.minimumTickSpacing = 10
```

```
xValueAxis.monthName = [ 'January',
                          'February',
                          'March',
                          'April',
                          'May',
                          'June',
                          'July',
                          'August',
                          'September',
                          'October',
                          'November',
                          'December' ]
xValueAxis.niceMonth = 1
xValueAxis.origShiftIPC = None
xValueAxis.origShiftMin = None
xValueAxis.origShiftSpecialValue = None
xValueAxis.rangeRound = 'none'
xValueAxis.reverseDirection = 0
xValueAxis.skipEndL = 'none'
xValueAxis.specialTickClear = 0
xValueAxis.specifiedTickDates = None
xValueAxis.strokeColor = Color(0,0,0,1)
xValueAxis.strokeDashArray = None
xValueAxis.strokeLineCap = 0
xValueAxis.strokeLineJoin = 0
xValueAxis.strokeMiterLimit = 10
xValueAxis.strokeWidth = 1
xValueAxis.style = 'normal'
xValueAxis.subGridEnd = None
xValueAxis.subGridStart = None
xValueAxis.subGridStrokeColor = Color(0,0,0,1)
xValueAxis.subGridStrokeDashArray = None
xValueAxis.subGridStrokeLineCap = 0
xValueAxis.subGridStrokeLineJoin = 0
xValueAxis.subGridStrokeMiterLimit = 10
xValueAxis.subGridStrokeWidth = 0.25
xValueAxis.subTickHi = 0
xValueAxis.subTickLo = 0
xValueAxis.subTickNum = 0
xValueAxis.tickAxisMode = 'axis'
xValueAxis.tickDown = 5
xValueAxis.tickUp = 0
xValueAxis.valueMax = None
xValueAxis.valueMin = None
xValueAxis.valueStep = None
xValueAxis.valueSteps = None
xValueAxis.visible = 1
xValueAxis.visibleAxis = 1
xValueAxis.visibleGrid = 0
xValueAxis.visibleLabels = 1
xValueAxis.visibleSubGrid = 0
xValueAxis.visibleSubTicks = 0
xValueAxis.visibleTicks = 1
xValueAxis.xLabelFormat = '{mm}/{yy}'
xValueAxis.zrangePref = 0
y = 10
yValueAxis.abf_ignore_zero = False
yValueAxis.avoidBoundFrac = None
yValueAxis.avoidBoundSpace = None
yValueAxis.drawGridLast = False
yValueAxis.forceZero = 0
yValueAxis.gridEnd = None
yValueAxis.gridStart = None
yValueAxis.gridStrokeColor = Color(0,0,0,1)
yValueAxis.gridStrokeDashArray = None
yValueAxis.gridStrokeLineCap = 0
yValueAxis.gridStrokeLineJoin = 0
yValueAxis.gridStrokeMiterLimit = 10
yValueAxis.gridStrokeWidth = 0.25
yValueAxis.hiLLen = 0
yValueAxis.joinAxis = None
yValueAxis.joinAxisMode = None
yValueAxis.joinAxisPos = None
yValueAxis.keepTickLabelsInside = 0
yValueAxis.labelAxisMode = 'axis'
yValueAxis.labelTextFormat = None
yValueAxis.labelTextPostFormat = None
yValueAxis.labelTextScale = None
yValueAxis.labelVOffset = 0
```

```
yValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1723328>
yValueAxis.leftAxisOrigShiftIPC = 0.15
yValueAxis.leftAxisOrigShiftMin = 12
yValueAxis.leftAxisPercent = 1
yValueAxis.leftAxisSkipLL0 = 0
yValueAxis.loLLen = 0
yValueAxis.maximumTicks = 7
yValueAxis.minimumTickSpacing = 10
yValueAxis.origShiftIPC = None
yValueAxis.origShiftMin = None
yValueAxis.origShiftSpecialValue = None
yValueAxis.rangeRound = 'none'
yValueAxis.requiredRange = 30
yValueAxis.reverseDirection = 0
yValueAxis.skipEndL = 'none'
yValueAxis.strokeColor = Color(0,0,0,1)
yValueAxis.strokeDashArray = None
yValueAxis.strokeLineCap = 0
yValueAxis.strokeLineJoin = 0
yValueAxis.strokeMiterLimit = 10
yValueAxis.strokeWidth = 1
yValueAxis.style = 'normal'
yValueAxis.subGridEnd = None
yValueAxis.subGridStart = None
yValueAxis.subGridStrokeColor = Color(0,0,0,1)
yValueAxis.subGridStrokeDashArray = None
yValueAxis.subGridStrokeLineCap = 0
yValueAxis.subGridStrokeLineJoin = 0
yValueAxis.subGridStrokeMiterLimit = 10
yValueAxis.subGridStrokeWidth = 0.25
yValueAxis.subTickHi = 0
yValueAxis.subTickLo = 0
yValueAxis.subTickNum = 0
yValueAxis.tickAxisMode = 'axis'
yValueAxis.tickLeft = 5
yValueAxis.tickRight = 0
yValueAxis.valueMax = None
yValueAxis.valueMin = None
yValueAxis.valueStep = None
yValueAxis.valueSteps = None
yValueAxis.visible = 1
yValueAxis.visibleAxis = 1
yValueAxis.visibleGrid = 0
yValueAxis.visibleLabels = 1
yValueAxis.visibleSubGrid = 0
yValueAxis.visibleSubTicks = 0
yValueAxis.visibleTicks = 1
yValueAxis.zrangePref = 0
```

## LinePlot(AbstractLineChart)

Line plot with multiple lines.

Both x- and y-axis are value axis (so there are no separate X and Y versions of this class).

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**behindAxes** If true use separate line group.

**data** Data to be plotted, list of (lists of) x/y tuples.

**debug** Used only for debugging.

**fillColor** Color used for background interior of plot area.

**gridFirst** If true use draw grids before axes.

**height** Height of the chart.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color used for background border of plot area.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xValueAxis** Handle of the x axis.

**y** Y position of the lower-left corner of the chart.

**yValueAxis** Handle of the y axis.

### Example

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()

    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = data
```



```

lp.joinedLines = 1
lp.lineLabelFormat = '%2.0f'
lp.strokeColor = colors.black

lp.lines[0].strokeColor = colors.red
lp.lines[0].symbol = makeMarker('FilledCircle')
lp.lines[1].strokeColor = colors.blue
lp.lines[1].symbol = makeMarker('FilledDiamond')

lp.xValueAxis.valueMin = 0
lp.xValueAxis.valueMax = 5
lp.xValueAxis.valueStep = 1

lp.yValueAxis.valueMin = 0
lp.yValueAxis.valueMax = 7
lp.yValueAxis.valueStep = 1

drawing.add(lp)

return drawing

```



### Properties of Example Widget

```

annotations = []
background = None
behindAxes = 0
data = [((1, 1), (2, 2), (2.5, 1), (3, 3), (4, 5)),
        ((1, 2), (2, 3), (2.5, 2), (3, 4), (4, 6))]
debug = 0
fillColor = None
gridFirst = 0
height = 85
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1726a58>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17269b8>
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
width = 180
x = 20
xValueAxis.abf_ignore_zero = False
xValueAxis.avoidBoundFrac = None
xValueAxis.avoidBoundSpace = None
xValueAxis.drawGridLast = False
xValueAxis.forceZero = 0
xValueAxis.gridEnd = None
xValueAxis.gridStart = None
xValueAxis.gridStrokeColor = Color(0,0,0,1)
xValueAxis.gridStrokeDashArray = None

```

```
xValueAxis.gridStrokeLineCap = 0
xValueAxis.gridStrokeLineJoin = 0
xValueAxis.gridStrokeMiterLimit = 10
xValueAxis.gridStrokeWidth = 0.25
xValueAxis.hiLLen = 0
xValueAxis.joinAxis = None
xValueAxis.joinAxisMode = None
xValueAxis.joinAxisPos = None
xValueAxis.keepTickLabelsInside = 0
xValueAxis.labelAxisMode = 'axis'
xValueAxis.labelTextFormat = None
xValueAxis.labelTextPostFormat = None
xValueAxis.labelTextScale = None
xValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17268f0>
xValueAxis.loLLen = 0
xValueAxis.maximumTicks = 7
xValueAxis.minimumTickSpacing = 10
xValueAxis.origShiftIPC = None
xValueAxis.origShiftMin = None
xValueAxis.origShiftSpecialValue = None
xValueAxis.rangeRound = 'none'
xValueAxis.reverseDirection = 0
xValueAxis.skipEndL = 'none'
xValueAxis.strokeColor = Color(0,0,0,1)
xValueAxis.strokeDashArray = None
xValueAxis.strokeLineCap = 0
xValueAxis.strokeLineJoin = 0
xValueAxis.strokeMiterLimit = 10
xValueAxis.strokeWidth = 1
xValueAxis.style = 'normal'
xValueAxis.subGridEnd = None
xValueAxis.subGridStart = None
xValueAxis.subGridStrokeColor = Color(0,0,0,1)
xValueAxis.subGridStrokeDashArray = None
xValueAxis.subGridStrokeLineCap = 0
xValueAxis.subGridStrokeLineJoin = 0
xValueAxis.subGridStrokeMiterLimit = 10
xValueAxis.subGridStrokeWidth = 0.25
xValueAxis.subTickHi = 0
xValueAxis.subTickLo = 0
xValueAxis.subTickNum = 0
xValueAxis.tickAxisMode = 'axis'
xValueAxis.tickDown = 5
xValueAxis.tickUp = 0
xValueAxis.valueMax = None
xValueAxis.valueMin = None
xValueAxis.valueStep = None
xValueAxis.visible = 1
xValueAxis.visibleAxis = 1
xValueAxis.visibleGrid = 0
xValueAxis.visibleLabels = 1
xValueAxis.visibleSubGrid = 0
xValueAxis.visibleSubTicks = 0
xValueAxis.visibleTicks = 1
xValueAxis.zrangePref = 0
y = 10
yValueAxis.abf_ignore_zero = False
yValueAxis.avoidBoundFrac = None
yValueAxis.avoidBoundSpace = None
yValueAxis.drawGridLast = False
yValueAxis.forceZero = 0
yValueAxis.gridEnd = None
yValueAxis.gridStart = None
yValueAxis.gridStrokeColor = Color(0,0,0,1)
yValueAxis.gridStrokeDashArray = None
yValueAxis.gridStrokeLineCap = 0
yValueAxis.gridStrokeLineJoin = 0
yValueAxis.gridStrokeMiterLimit = 10
yValueAxis.gridStrokeWidth = 0.25
yValueAxis.hiLLen = 0
yValueAxis.joinAxis = None
yValueAxis.joinAxisMode = None
yValueAxis.joinAxisPos = None
yValueAxis.keepTickLabelsInside = 0
yValueAxis.labelAxisMode = 'axis'
yValueAxis.labelTextFormat = None
yValueAxis.labelTextPostFormat = None
yValueAxis.labelTextScale = None
yValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1726968>
```

```
yValueAxis.loLLen = 0
yValueAxis.maximumTicks = 7
yValueAxis.minimumTickSpacing = 10
yValueAxis.origShiftIPC = None
yValueAxis.origShiftMin = None
yValueAxis.origShiftSpecialValue = None
yValueAxis.rangeRound = 'none'
yValueAxis.reverseDirection = 0
yValueAxis.skipEndL = 'none'
yValueAxis.strokeColor = Color(0,0,0,1)
yValueAxis.strokeDashArray = None
yValueAxis.strokeLineCap = 0
yValueAxis.strokeLineJoin = 0
yValueAxis.strokeMiterLimit = 10
yValueAxis.strokeWidth = 1
yValueAxis.style = 'normal'
yValueAxis.subGridEnd = None
yValueAxis.subGridStart = None
yValueAxis.subGridStrokeColor = Color(0,0,0,1)
yValueAxis.subGridStrokeDashArray = None
yValueAxis.subGridStrokeLineCap = 0
yValueAxis.subGridStrokeLineJoin = 0
yValueAxis.subGridStrokeMiterLimit = 10
yValueAxis.subGridStrokeWidth = 0.25
yValueAxis.subTickHi = 0
yValueAxis.subTickLo = 0
yValueAxis.subTickNum = 0
yValueAxis.tickAxisMode = 'axis'
yValueAxis.tickLeft = 5
yValueAxis.tickRight = 0
yValueAxis.valueMax = None
yValueAxis.valueMin = None
yValueAxis.valueStep = None
yValueAxis.visible = 1
yValueAxis.visibleAxis = 1
yValueAxis.visibleGrid = 0
yValueAxis.visibleLabels = 1
yValueAxis.visibleSubGrid = 0
yValueAxis.visibleSubTicks = 0
yValueAxis.visibleTicks = 1
yValueAxis.zrangePref = 0
```

## LinePlot3D(LinePlot)

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**behindAxes** If true use separate line group.

**data** Data to be plotted, list of (lists of) x/y tuples.

**debug** Used only for debugging.

**fillColor** Color used for background interior of plot area.

**gridFirst** If true use draw grids before axes.

**height** Height of the chart.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color used for background border of plot area.

**strokeWidth** Width plot area border.

**theta\_x**  $dx/dz$

**theta\_y**  $dy/dz$

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xValueAxis** Handle of the x axis.

**y** Y position of the lower-left corner of the chart.

**yValueAxis** Handle of the y axis.

**zDepth** depth of an individual series

**zSpace** z gap around series

### Example

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()

    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
```

```
lp.data = data
lp.joinedLines = 1
lp.lineLabelFormat = '%2.0f'
lp.strokeColor = colors.black

lp.lines[0].strokeColor = colors.red
lp.lines[0].symbol = makeMarker('FilledCircle')
lp.lines[1].strokeColor = colors.blue
lp.lines[1].symbol = makeMarker('FilledDiamond')

lp.xValueAxis.valueMin = 0
lp.xValueAxis.valueMax = 5
lp.xValueAxis.valueStep = 1

lp.yValueAxis.valueMin = 0
lp.yValueAxis.valueMax = 7
lp.yValueAxis.valueStep = 1

drawing.add(lp)

return drawing
```



### *Properties of Example Widget*

```
annotations = []
background = None
behindAxes = 0
data = [((1, 1), (2, 2), (2.5, 1), (3, 3), (4, 5)),
        ((1, 2), (2, 3), (2.5, 2), (3, 4), (4, 6))]
debug = 0
fillColor = None
gridFirst = 0
height = 85
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1735670>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17355d0>
reversePlotOrder = 0
strokeColor = None
strokeWidth = 1
width = 180
x = 20
xValueAxis.abf_ignore_zero = False
xValueAxis.avoidBoundFrac = None
xValueAxis.avoidBoundSpace = None
xValueAxis.drawGridLast = False
xValueAxis.forceZero = 0
xValueAxis.gridEnd = None
xValueAxis.gridStart = None
xValueAxis.gridStrokeColor = Color(0,0,0,1)
```

```
xValueAxis.gridStrokeDashArray = None
xValueAxis.gridStrokeLineCap = 0
xValueAxis.gridStrokeLineJoin = 0
xValueAxis.gridStrokeMiterLimit = 10
xValueAxis.gridStrokeWidth = 0.25
xValueAxis.hiLLen = 0
xValueAxis.joinAxis = None
xValueAxis.joinAxisMode = None
xValueAxis.joinAxisPos = None
xValueAxis.keepTickLabelsInside = 0
xValueAxis.labelAxisMode = 'axis'
xValueAxis.labelTextFormat = None
xValueAxis.labelTextPostFormat = None
xValueAxis.labelTextScale = None
xValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1735508>
xValueAxis.loLLen = 0
xValueAxis.maximumTicks = 7
xValueAxis.minimumTickSpacing = 10
xValueAxis.origShiftIPC = None
xValueAxis.origShiftMin = None
xValueAxis.origShiftSpecialValue = None
xValueAxis.rangeRound = 'none'
xValueAxis.reverseDirection = 0
xValueAxis.skipEndL = 'none'
xValueAxis.strokeColor = Color(0,0,0,1)
xValueAxis.strokeDashArray = None
xValueAxis.strokeLineCap = 0
xValueAxis.strokeLineJoin = 0
xValueAxis.strokeMiterLimit = 10
xValueAxis.strokeWidth = 1
xValueAxis.style = 'normal'
xValueAxis.subGridEnd = None
xValueAxis.subGridStart = None
xValueAxis.subGridStrokeColor = Color(0,0,0,1)
xValueAxis.subGridStrokeDashArray = None
xValueAxis.subGridStrokeLineCap = 0
xValueAxis.subGridStrokeLineJoin = 0
xValueAxis.subGridStrokeMiterLimit = 10
xValueAxis.subGridStrokeWidth = 0.25
xValueAxis.subTickHi = 0
xValueAxis.subTickLo = 0
xValueAxis.subTickNum = 0
xValueAxis.tickAxisMode = 'axis'
xValueAxis.tickDown = 5
xValueAxis.tickUp = 0
xValueAxis.valueMax = None
xValueAxis.valueMin = None
xValueAxis.valueStep = None
xValueAxis.visible = 1
xValueAxis.visibleAxis = 1
xValueAxis.visibleGrid = 0
xValueAxis.visibleLabels = 1
xValueAxis.visibleSubGrid = 0
xValueAxis.visibleSubTicks = 0
xValueAxis.visibleTicks = 1
xValueAxis.zrangePref = 0
y = 10
yValueAxis.abf_ignore_zero = False
yValueAxis.avoidBoundFrac = None
yValueAxis.avoidBoundSpace = None
yValueAxis.drawGridLast = False
yValueAxis.forceZero = 0
yValueAxis.gridEnd = None
yValueAxis.gridStart = None
yValueAxis.gridStrokeColor = Color(0,0,0,1)
yValueAxis.gridStrokeDashArray = None
yValueAxis.gridStrokeLineCap = 0
yValueAxis.gridStrokeLineJoin = 0
yValueAxis.gridStrokeMiterLimit = 10
yValueAxis.gridStrokeWidth = 0.25
yValueAxis.hiLLen = 0
yValueAxis.joinAxis = None
yValueAxis.joinAxisMode = None
yValueAxis.joinAxisPos = None
yValueAxis.keepTickLabelsInside = 0
yValueAxis.labelAxisMode = 'axis'
yValueAxis.labelTextFormat = None
yValueAxis.labelTextPostFormat = None
yValueAxis.labelTextScale = None
```

```
yValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1735580>
yValueAxis.loLLen = 0
yValueAxis.maximumTicks = 7
yValueAxis.minimumTickSpacing = 10
yValueAxis.origShiftIPC = None
yValueAxis.origShiftMin = None
yValueAxis.origShiftSpecialValue = None
yValueAxis.rangeRound = 'none'
yValueAxis.reverseDirection = 0
yValueAxis.skipEndL = 'none'
yValueAxis.strokeColor = Color(0,0,0,1)
yValueAxis.strokeDashArray = None
yValueAxis.strokeLineCap = 0
yValueAxis.strokeLineJoin = 0
yValueAxis.strokeMiterLimit = 10
yValueAxis.strokeWidth = 1
yValueAxis.style = 'normal'
yValueAxis.subGridEnd = None
yValueAxis.subGridStart = None
yValueAxis.subGridStrokeColor = Color(0,0,0,1)
yValueAxis.subGridStrokeDashArray = None
yValueAxis.subGridStrokeLineCap = 0
yValueAxis.subGridStrokeLineJoin = 0
yValueAxis.subGridStrokeMiterLimit = 10
yValueAxis.subGridStrokeWidth = 0.25
yValueAxis.subTickHi = 0
yValueAxis.subTickLo = 0
yValueAxis.subTickNum = 0
yValueAxis.tickAxisMode = 'axis'
yValueAxis.tickLeft = 5
yValueAxis.tickRight = 0
yValueAxis.valueMax = None
yValueAxis.valueMin = None
yValueAxis.valueStep = None
yValueAxis.visible = 1
yValueAxis.visibleAxis = 1
yValueAxis.visibleGrid = 0
yValueAxis.visibleLabels = 1
yValueAxis.visibleSubGrid = 0
yValueAxis.visibleSubTicks = 0
yValueAxis.visibleTicks = 1
yValueAxis.zrangePref = 0
```

## ScatterPlot(LinePlot)

A scatter plot widget

### Public Attributes

**annotations** list of callables, will be called with self, xscale, yscale.

**axisStrokeWidth** Stroke width for both axes

**axisTickLengths** Length of the ticks on both axes

**background** Background color (if any)

**behindAxes** If true use separate line group.

**bottomPadding** Padding at bottom of drawing

**data** Data points - a list of x/y tuples.

**debug** Used only for debugging.

**fillColor** Color used for background interior of plot area.

**gridFirst** If true use draw grids before axes.

**height** Height of the area inside the axes

**joinedLines** Display data points joined with lines if true.

**labelOffset** Space between label and Axis (or other labels)

**leftPadding** Padding on left of drawing

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**outerBorderColor** Color of outer border (if any)

**outerBorderOn** Is there an outer border (continuation of axes)

**reversePlotOrder** If true reverse plot order.

**rightPadding** Padding on right of drawing

**strokeColor** Color used for border of plot area.

**strokeWidth** Width plot area border.

**topPadding** Padding at top of drawing

**width** Width of the area inside the axes

**x** X position of the lower-left corner of the chart.

**xLabel** Label for the whole X-Axis

**xValueAxis** Handle of the x axis.

**y** Y position of the lower-left corner of the chart.

**yLabel** Label for the whole Y-Axis

**yValueAxis** Handle of the y axis.



*Example*

```
def demo(self,drawing=None):
    if not drawing:
        tx,ty=self._getDrawingDimensions()
        drawing = Drawing(tx,ty)
    drawing.add(self.draw())
    return drawing
```

*Properties of Example Widget*

```
annotations = []
background = None
behindAxes = 0
bottomPadding = 5
data = [((0.03, 62.73), (0.074, 54.363), (1.216, 17.964)),
        ((1.36, 11.621), (1.387, 50.011), (1.428, 68.953)),
        ((1.444, 86.888), (1.754, 35.58), (1.766, 36.05))]
debug = 0
fillColor = None
gridFirst = 0
height = 77
joinedLines = 0
leftPadding = 5
lineLabelArray = None
lineLabelFormat = '%.2f'
lineLabelNudge = 0
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17407b0>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1740710>
outerBorderColor = Color(0,0,0,1)
outerBorderOn = 1
reversePlotOrder = 0
rightPadding = 10
strokeColor = None
strokeWidth = 1
topPadding = 5
width = 142
x = 25.996
xLabel = 'X Lable'
xValueAxis.abf_ignore_zero = False
xValueAxis.avoidBoundFrac = None
xValueAxis.avoidBoundSpace = None
xValueAxis.drawGridLast = False
xValueAxis.forceZero = 0
xValueAxis.gridEnd = None
xValueAxis.gridStart = None
xValueAxis.gridStrokeColor = Color(0,0,0,1)
xValueAxis.gridStrokeDashArray = None
xValueAxis.gridStrokeLineCap = 0
xValueAxis.gridStrokeLineJoin = 0
xValueAxis.gridStrokeMiterLimit = 10
xValueAxis.gridStrokeWidth = 0.25
xValueAxis.hiLLen = 0
xValueAxis.joinAxis = None
xValueAxis.joinAxisMode = None
xValueAxis.joinAxisPos = None
xValueAxis.keepTickLabelsInside = 0
xValueAxis.labelAxisMode = 'axis'
xValueAxis.labelTextFormat = None
xValueAxis.labelTextPostFormat = None
xValueAxis.labelTextScale = None
xValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17269e0>
xValueAxis.loLLen = 0
xValueAxis.maximumTicks = 7
xValueAxis.minimumTickSpacing = 10
xValueAxis.origShiftIPC = None
xValueAxis.origShiftMin = None
xValueAxis.origShiftSpecialValue = None
xValueAxis.rangeRound = 'both'
xValueAxis.reverseDirection = 0
xValueAxis.skipEndL = 'none'
xValueAxis.strokeColor = Color(0,0,0,1)
xValueAxis.strokeDashArray = None
xValueAxis.strokeLineCap = 0
xValueAxis.strokeLineJoin = 0
xValueAxis.strokeMiterLimit = 10
```

```
xValueAxis.strokeWidth = 0.5
xValueAxis.style = 'normal'
xValueAxis.subGridEnd = None
xValueAxis.subGridStart = None
xValueAxis.subGridStrokeColor = Color(0,0,0,1)
xValueAxis.subGridStrokeDashArray = None
xValueAxis.subGridStrokeLineCap = 0
xValueAxis.subGridStrokeLineJoin = 0
xValueAxis.subGridStrokeMiterLimit = 10
xValueAxis.subGridStrokeWidth = 0.25
xValueAxis.subTickHi = 0
xValueAxis.subTickLo = 0
xValueAxis.subTickNum = 0
xValueAxis.tickAxisMode = 'axis'
xValueAxis.tickDown = 2
xValueAxis.tickUp = 0
xValueAxis.valueMax = None
xValueAxis.valueMin = None
xValueAxis.valueStep = None
xValueAxis.visible = 1
xValueAxis.visibleAxis = 1
xValueAxis.visibleGrid = 0
xValueAxis.visibleLabels = 1
xValueAxis.visibleSubGrid = 0
xValueAxis.visibleSubTicks = 0
xValueAxis.visibleTicks = 1
xValueAxis.zrangePref = 0
y = 16
yLabel = 'Y Lable'
yValueAxis.abf_ignore_zero = False
yValueAxis.avoidBoundFrac = None
yValueAxis.avoidBoundSpace = None
yValueAxis.drawGridLast = False
yValueAxis.forceZero = 0
yValueAxis.gridEnd = None
yValueAxis.gridStart = None
yValueAxis.gridStrokeColor = Color(0,0,0,1)
yValueAxis.gridStrokeDashArray = None
yValueAxis.gridStrokeLineCap = 0
yValueAxis.gridStrokeLineJoin = 0
yValueAxis.gridStrokeMiterLimit = 10
yValueAxis.gridStrokeWidth = 0.25
yValueAxis.hilLen = 0
yValueAxis.joinAxis = None
yValueAxis.joinAxisMode = None
yValueAxis.joinAxisPos = None
yValueAxis.keepTickLabelsInside = 0
yValueAxis.labelAxisMode = 'axis'
yValueAxis.labelTextFormat = '%s'
yValueAxis.labelTextPostFormat = None
yValueAxis.labelTextScale = None
yValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17406c0>
yValueAxis.loLLen = 0
yValueAxis.maximumTicks = 7
yValueAxis.minimumTickSpacing = 10
yValueAxis.origShiftIPC = None
yValueAxis.origShiftMin = None
yValueAxis.origShiftSpecialValue = None
yValueAxis.rangeRound = 'both'
yValueAxis.reverseDirection = 0
yValueAxis.skipEndL = 'none'
yValueAxis.strokeColor = Color(0,0,0,1)
yValueAxis.strokeDashArray = None
yValueAxis.strokeLineCap = 0
yValueAxis.strokeLineJoin = 0
yValueAxis.strokeMiterLimit = 10
yValueAxis.strokeWidth = 0.5
yValueAxis.style = 'normal'
yValueAxis.subGridEnd = None
yValueAxis.subGridStart = None
yValueAxis.subGridStrokeColor = Color(0,0,0,1)
yValueAxis.subGridStrokeDashArray = None
yValueAxis.subGridStrokeLineCap = 0
yValueAxis.subGridStrokeLineJoin = 0
yValueAxis.subGridStrokeMiterLimit = 10
yValueAxis.subGridStrokeWidth = 0.25
yValueAxis.subTickHi = 0
yValueAxis.subTickLo = 0
yValueAxis.subTickNum = 0
```

```
yValueAxis.tickAxisMode = 'axis'  
yValueAxis.tickLeft = 2  
yValueAxis.tickRight = 0  
yValueAxis.valueMax = None  
yValueAxis.valueMin = None  
yValueAxis.valueStep = None  
yValueAxis.visible = 1  
yValueAxis.visibleAxis = 1  
yValueAxis.visibleGrid = 0  
yValueAxis.visibleLabels = 1  
yValueAxis.visibleSubGrid = 0  
yValueAxis.visibleSubTicks = 0  
yValueAxis.visibleTicks = 1  
yValueAxis.zrangePref = 0
```

## **ShadedPolyFiller(Filler, ShadedPolygon)**

### **Public Attributes**

**fillColor** filler interior color

**strokeColor** filler edge color

**strokeWidth** filler edge width

### *Example*

```
def demo(self):  
    msg = "demo() must be implemented for each Widget!"  
    raise shapes.NotImplementedError, msg
```

### *Properties of Example Widget*

## **SplitLinePlot (AreaLinePlot)**

### **Public Attributes**

**annotations** list of callables, will be called with self, xscale, yscale.

**background** Handle to background object e.g. Rect(0,0,width,height).

**behindAxes** If true use separate line group.

**data** Data to be plotted, list of (lists of) x/y tuples.

**debug** Used only for debugging.

**fillColor** Color used for background interior of plot area.

**gridFirst** If true use draw grids before axes.

**height** Height of the chart.

**joinedLines** Display data points joined with lines if true.

**lineLabelArray** explicit array of line label values, must match size of data if present.

**lineLabelFormat** Formatting string or function used for data point labels.

**lineLabelNudge** Distance between a data point and its label.

**lineLabels** Handle to the list of data point labels.

**lines** Handle of the lines.

**reversePlotOrder** If true reverse plot order.

**strokeColor** Color used for background border of plot area.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**xValueAxis** Handle of the x axis.

**y** Y position of the lower-left corner of the chart.

**yValueAxis** Handle of the y axis.

### *Example*

```
def demo(self):
    """Shows basic use of a line chart."""

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()

    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = data
    lp.joinedLines = 1
    lp.lineLabelFormat = '%2.0f'
    lp.strokeColor = colors.black

    lp.lines[0].strokeColor = colors.red
    lp.lines[0].symbol = makeMarker('FilledCircle')
    lp.lines[1].strokeColor = colors.blue
```

```

lp.lines[1].symbol = makeMarker('FilledDiamond')

lp.xValueAxis.valueMin = 0
lp.xValueAxis.valueMax = 5
lp.xValueAxis.valueStep = 1

lp.yValueAxis.valueMin = 0
lp.yValueAxis.valueMax = 7
lp.yValueAxis.valueStep = 1

drawing.add(lp)

return drawing

```



### Properties of Example Widget

```

annotations = []
background = None
behindAxes = 0
data = [(20030601, 0.95, 0.05, 0.0),
        (20030701, 0.95, 0.05, 0.0),
        (20030801, 0.95, 0.05, 0.0),
        (20030901, 0.95, 0.05, 0.0),
        (20031001, 0.95, 0.05, 0.0),
        (20031101, 0.95, 0.05, 0.0),
        (20031201, 0.95, 0.05, 0.0),
        (20040101, 0.95, 0.05, 0.0),
        (20040201, 0.95, 0.05, 0.0),
        (20040301, 0.95, 0.05, 0.0),
        (20040401, 0.95, 0.05, 0.0),
        (20040501, 0.95, 0.05, 0.0),
        (20040601, 0.95, 0.05, 0.0),
        (20040701, 0.95, 0.05, 0.0),
        (20040801, 0.95, 0.05, 0.0),
        (20040901, 0.95, 0.05, 0.0),
        (20041001, 0.95, 0.05, 0.0),
        (20041101, 0.95, 0.05, 0.0),
        (20041201, 0.95, 0.05, 0.0),
        (20050101, 0.95, 0.05, 0.0),
        (20050201, 0.95, 0.05, 0.0),
        (20050301, 0.95, 0.05, 0.0),
        (20050401, 0.95, 0.05, 0.0),
        (20050501, 0.95, 0.05, 0.0),
        (20050601, 0.95, 0.05, 0.0),
        (20050701, 0.95, 0.05, 0.0),
        (20050801, 0.95, 0.05, 0.0),
        (20050901, 0.95, 0.05, 0.0),
        (20051001, 0.95, 0.05, 0.0),
        (20051101, 0.95, 0.05, 0.0),
        (20051201, 0.95, 0.05, 0.0),
        (20060101, 0.95, 0.05, 0.0),
        (20060201, 0.95, 0.05, 0.0),

```

```
(20060301, 0.95, 0.05, 0.0),
(20060401, 0.95, 0.05, 0.0),
(20060501, 0.95, 0.05, 0.0),
(20060601, 0.95, 0.05, 0.0),
(20060701, 0.95, 0.05, 0.0),
(20060801, 0.95, 0.05, 0.0),
(20060901, 0.95, 0.05, 0.0),
(20061001, 0.95, 0.05, 0.0),
(20061101, 0.95, 0.05, 0.0),
(20061201, 0.95, 0.05, 0.0),
(20070101, 0.95, 0.05, 0.0),
(20070201, 0.95, 0.05, 0.0),
(20070301, 0.95, 0.05, 0.0),
(20070401, 0.95, 0.05, 0.0),
(20070501, 0.95, 0.05, 0.0),
(20070601, 0.95, 0.05, 0.0),
(20070701, 0.95, 0.05, 0.0),
(20070801, 0.95, 0.05, 0.0),
(20070901, 0.95, 0.05, 0.0),
(20071001, 0.95, 0.05, 0.0),
(20071101, 0.95, 0.05, 0.0),
(20071201, 0.95, 0.05, 0.0),
(20080101, 0.95, 0.05, 0.0),
(20080201, 0.95, 0.05, 0.0),
(20080301, 0.95, 0.05, 0.0),
(20080401, 0.95, 0.05, 0.0),
(20080501, 0.95, 0.05, 0.0),
(20080601, 0.95, 0.05, 0.0),
(20080701, 0.95, 0.05, 0.0),
(20080801, 0.95, 0.05, 0.0),
(20080901, 0.95, 0.05, 0.0),
(20081001, 0.95, 0.05, 0.0),
(20081101, 0.95, 0.05, 0.0),
(20081201, 0.95, 0.05, 0.0),
(20090101, 0.95, 0.05, 0.0),
(20090201, 0.91, 0.09, 0.0),
(20090301, 0.91, 0.09, 0.0),
(20090401, 0.91, 0.09, 0.0),
(20090501, 0.91, 0.09, 0.0),
(20090601, 0.91, 0.09, 0.0),
(20090701, 0.91, 0.09, 0.0),
(20090801, 0.91, 0.09, 0.0),
(20090901, 0.91, 0.09, 0.0),
(20091001, 0.91, 0.09, 0.0),
(20091101, 0.91, 0.09, 0.0),
(20091201, 0.91, 0.09, 0.0),
(20100101, 0.91, 0.09, 0.0),
(20100201, 0.81, 0.19, 0.0),
(20100301, 0.81, 0.19, 0.0),
(20100401, 0.81, 0.19, 0.0),
(20100501, 0.81, 0.19, 0.0),
(20100601, 0.81, 0.19, 0.0),
(20100701, 0.81, 0.19, 0.0),
(20100801, 0.81, 0.19, 0.0),
(20100901, 0.81, 0.19, 0.0),
(20101001, 0.81, 0.19, 0.0),
(20101101, 0.81, 0.19, 0.0),
(20101201, 0.81, 0.19, 0.0),
(20110101, 0.81, 0.19, 0.0),
(20110201, 0.72, 0.28, 0.0),
(20110301, 0.72, 0.28, 0.0),
(20110401, 0.72, 0.28, 0.0),
(20110501, 0.72, 0.28, 0.0),
(20110601, 0.72, 0.28, 0.0),
(20110701, 0.72, 0.28, 0.0),
(20110801, 0.72, 0.28, 0.0),
(20110901, 0.72, 0.28, 0.0),
(20111001, 0.72, 0.28, 0.0),
(20111101, 0.72, 0.28, 0.0),
(20111201, 0.72, 0.28, 0.0),
(20120101, 0.72, 0.28, 0.0),
(20120201, 0.53, 0.47, 0.0),
(20120301, 0.53, 0.47, 0.0),
(20120401, 0.53, 0.47, 0.0),
(20120501, 0.53, 0.47, 0.0),
(20120601, 0.53, 0.47, 0.0),
(20120701, 0.53, 0.47, 0.0),
(20120801, 0.53, 0.47, 0.0),
(20120901, 0.53, 0.47, 0.0),
```

```
(20121001, 0.53, 0.47, 0.0),
(20121101, 0.53, 0.47, 0.0),
(20121201, 0.53, 0.47, 0.0),
(20130101, 0.53, 0.47, 0.0),
(20130201, 0.44, 0.56, 0.0),
(20130301, 0.44, 0.56, 0.0),
(20130401, 0.44, 0.56, 0.0),
(20130501, 0.44, 0.56, 0.0),
(20130601, 0.44, 0.56, 0.0),
(20130701, 0.44, 0.56, 0.0),
(20130801, 0.44, 0.56, 0.0),
(20130901, 0.44, 0.56, 0.0),
(20131001, 0.44, 0.56, 0.0),
(20131101, 0.44, 0.56, 0.0),
(20131201, 0.44, 0.56, 0.0),
(20140101, 0.44, 0.56, 0.0),
(20140201, 0.36, 0.5, 0.14),
(20140301, 0.36, 0.5, 0.14),
(20140401, 0.36, 0.5, 0.14),
(20140501, 0.36, 0.5, 0.14),
(20140601, 0.36, 0.5, 0.14),
(20140701, 0.36, 0.5, 0.14),
(20140801, 0.36, 0.5, 0.14),
(20140901, 0.36, 0.5, 0.14),
(20141001, 0.36, 0.5, 0.14),
(20141101, 0.36, 0.5, 0.14),
(20141201, 0.36, 0.5, 0.14),
(20150101, 0.36, 0.5, 0.14),
(20150201, 0.3, 0.41, 0.29),
(20150301, 0.3, 0.41, 0.29),
(20150401, 0.3, 0.41, 0.29),
(20150501, 0.3, 0.41, 0.29),
(20150601, 0.3, 0.41, 0.29),
(20150701, 0.3, 0.41, 0.29),
(20150801, 0.3, 0.41, 0.29),
(20150901, 0.3, 0.41, 0.29),
(20151001, 0.3, 0.41, 0.29),
(20151101, 0.3, 0.41, 0.29),
(20151201, 0.3, 0.41, 0.29),
(20160101, 0.3, 0.41, 0.29),
(20160201, 0.26, 0.36, 0.38),
(20160301, 0.26, 0.36, 0.38),
(20160401, 0.26, 0.36, 0.38),
(20160501, 0.26, 0.36, 0.38),
(20160601, 0.26, 0.36, 0.38),
(20160701, 0.26, 0.36, 0.38),
(20160801, 0.26, 0.36, 0.38),
(20160901, 0.26, 0.36, 0.38),
(20161001, 0.26, 0.36, 0.38),
(20161101, 0.26, 0.36, 0.38),
(20161201, 0.26, 0.36, 0.38),
(20170101, 0.26, 0.36, 0.38),
(20170201, 0.2, 0.3, 0.5),
(20170301, 0.2, 0.3, 0.5),
(20170401, 0.2, 0.3, 0.5),
(20170501, 0.2, 0.3, 0.5),
(20170601, 0.2, 0.3, 0.5),
(20170701, 0.2, 0.3, 0.5),
(20170801, 0.2, 0.3, 0.5),
(20170901, 0.2, 0.3, 0.5),
(20171001, 0.2, 0.3, 0.5),
(20171101, 0.2, 0.3, 0.5),
(20171201, 0.2, 0.3, 0.5),
(20180101, 0.2, 0.3, 0.5),
(20180201, 0.13, 0.37, 0.5),
(20180301, 0.13, 0.37, 0.5),
(20180401, 0.13, 0.37, 0.5),
(20180501, 0.13, 0.37, 0.5),
(20180601, 0.13, 0.37, 0.5),
(20180701, 0.13, 0.37, 0.5),
(20180801, 0.13, 0.37, 0.5),
(20180901, 0.13, 0.37, 0.5),
(20181001, 0.13, 0.37, 0.5),
(20181101, 0.13, 0.37, 0.5),
(20181201, 0.13, 0.37, 0.5),
(20190101, 0.13, 0.37, 0.5),
(20190201, 0.1, 0.4, 0.5),
(20190301, 0.1, 0.4, 0.5),
(20190401, 0.1, 0.4, 0.5),
```



```
(20190501, 0.1, 0.4, 0.5),
(20190601, 0.1, 0.4, 0.5),
(20190701, 0.1, 0.4, 0.5),
(20190801, 0.1, 0.4, 0.5),
(20190901, 0.1, 0.4, 0.5),
(20191001, 0.1, 0.4, 0.5),
(20191101, 0.1, 0.4, 0.5),
(20191201, 0.1, 0.4, 0.5),
(20200101, 0.1, 0.4, 0.5)]
debug = 0
fillColor = None
gridFirst = 0
height = 85
joinedLines = 1
lineLabelArray = None
lineLabelFormat = None
lineLabelNudge = 10
lineLabels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x17495a8>
lines = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1749508>
reversePlotOrder = 1
strokeColor = None
strokeWidth = 1
width = 180
x = 20
xValueAxis.abf_ignore_zero = False
xValueAxis.avoidBoundFrac = None
xValueAxis.avoidBoundSpace = None
xValueAxis.bottomAxisLabelSlack = 0.1
xValueAxis.dailyFreq = 0
xValueAxis.dayOfWeekName = ['Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'Sunday']
xValueAxis.drawGridLast = False
xValueAxis.forceDatesEachYear = []
xValueAxis.forceEndDate = 0
xValueAxis.forceFirstDate = 0
xValueAxis.forceZero = 0
xValueAxis.gridEnd = None
xValueAxis.gridStart = None
xValueAxis.gridStrokeColor = Color(0,0,0,1)
xValueAxis.gridStrokeDashArray = None
xValueAxis.gridStrokeLineCap = 0
xValueAxis.gridStrokeLineJoin = 0
xValueAxis.gridStrokeMiterLimit = 10
xValueAxis.gridStrokeWidth = 0.25
xValueAxis.hiLen = 0
xValueAxis.joinAxis = None
xValueAxis.joinAxisMode = None
xValueAxis.joinAxisPos = None
xValueAxis.keepTickLabelsInside = 0
xValueAxis.labelAxisMode = 'axis'
xValueAxis.labelTextFormat = None
xValueAxis.labelTextPostFormat = None
xValueAxis.labelTextScale = None
xValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1749620>
xValueAxis.loLen = 0
xValueAxis.maximumTicks = 7
xValueAxis.minimumTickSpacing = 10
xValueAxis.monthName = ['January',
                        'February',
                        'March',
                        'April',
                        'May',
                        'June',
                        'July',
                        'August',
                        'September',
                        'October',
                        'November',
                        'December']
xValueAxis.niceMonth = 1
xValueAxis.origShiftIPC = None
xValueAxis.origShiftMin = None
xValueAxis.origShiftSpecialValue = None
xValueAxis.rangeRound = 'none'
xValueAxis.reverseDirection = 0
xValueAxis.skipEndL = 'none'
xValueAxis.specialTickClear = 0
xValueAxis.specifiedTickDates = None
xValueAxis.strokeColor = Color(0,0,0,1)
xValueAxis.strokeDashArray = None
```

```
xValueAxis.strokeLineCap = 0
xValueAxis.strokeLineJoin = 0
xValueAxis.strokeMiterLimit = 10
xValueAxis.strokeWidth = 1
xValueAxis.style = 'normal'
xValueAxis.subGridEnd = None
xValueAxis.subGridStart = None
xValueAxis.subGridStrokeColor = Color(0,0,0,1)
xValueAxis.subGridStrokeDashArray = None
xValueAxis.subGridStrokeLineCap = 0
xValueAxis.subGridStrokeLineJoin = 0
xValueAxis.subGridStrokeMiterLimit = 10
xValueAxis.subGridStrokeWidth = 0.25
xValueAxis.subTickHi = 0
xValueAxis.subTickLo = 0
xValueAxis.subTickNum = 0
xValueAxis.tickAxisMode = 'axis'
xValueAxis.tickDown = 5
xValueAxis.tickUp = 0
xValueAxis.valueMax = None
xValueAxis.valueMin = None
xValueAxis.valueStep = None
xValueAxis.valueSteps = None
xValueAxis.visible = 1
xValueAxis.visibleAxis = 1
xValueAxis.visibleGrid = 0
xValueAxis.visibleLabels = 1
xValueAxis.visibleSubGrid = 0
xValueAxis.visibleSubTicks = 0
xValueAxis.visibleTicks = 1
xValueAxis.xLabelFormat = '{mm}/{yy}'
xValueAxis.zrangePref = 0
y = 10
yValueAxis.abf_ignore_zero = False
yValueAxis.avoidBoundFrac = None
yValueAxis.avoidBoundSpace = None
yValueAxis.drawGridLast = False
yValueAxis.forceZero = 0
yValueAxis.gridEnd = None
yValueAxis.gridStart = None
yValueAxis.gridStrokeColor = Color(0,0,0,1)
yValueAxis.gridStrokeDashArray = None
yValueAxis.gridStrokeLineCap = 0
yValueAxis.gridStrokeLineJoin = 0
yValueAxis.gridStrokeMiterLimit = 10
yValueAxis.gridStrokeWidth = 0.25
yValueAxis.hiLLen = 0
yValueAxis.joinAxis = None
yValueAxis.joinAxisMode = None
yValueAxis.joinAxisPos = None
yValueAxis.keepTickLabelsInside = 0
yValueAxis.labelAxisMode = 'axis'
yValueAxis.labelTextFormat = None
yValueAxis.labelTextPostFormat = None
yValueAxis.labelTextScale = None
yValueAxis.labelVOffset = 0
yValueAxis.labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1749440>
yValueAxis.leftAxisOrigShiftMin = 0
yValueAxis.leftAxisPercent = 0
yValueAxis.leftAxisSkipLL0 = 0
yValueAxis.loLLen = 0
yValueAxis.maximumTicks = 7
yValueAxis.minimumTickSpacing = 10
yValueAxis.origShiftIPC = None
yValueAxis.origShiftMin = None
yValueAxis.origShiftSpecialValue = None
yValueAxis.rangeRound = 'none'
yValueAxis.requiredRange = None
yValueAxis.reverseDirection = 0
yValueAxis.skipEndL = 'none'
yValueAxis.strokeColor = Color(0,0,0,1)
yValueAxis.strokeDashArray = None
yValueAxis.strokeLineCap = 0
yValueAxis.strokeLineJoin = 0
yValueAxis.strokeMiterLimit = 10
yValueAxis.strokeWidth = 1
yValueAxis.style = 'normal'
yValueAxis.subGridEnd = None
```

```
yValueAxis.subGridStart = None
yValueAxis.subGridStrokeColor = Color(0,0,0,1)
yValueAxis.subGridStrokeDashArray = None
yValueAxis.subGridStrokeLineCap = 0
yValueAxis.subGridStrokeLineJoin = 0
yValueAxis.subGridStrokeMiterLimit = 10
yValueAxis.subGridStrokeWidth = 0.25
yValueAxis.subTickHi = 0
yValueAxis.subTickLo = 0
yValueAxis.subTickNum = 0
yValueAxis.tickAxisMode = 'axis'
yValueAxis.tickLeft = 5
yValueAxis.tickRight = 0
yValueAxis.valueMax = None
yValueAxis.valueMin = None
yValueAxis.valueStep = None
yValueAxis.valueSteps = None
yValueAxis.visible = 1
yValueAxis.visibleAxis = 1
yValueAxis.visibleGrid = 0
yValueAxis.visibleLabels = 1
yValueAxis.visibleSubGrid = 0
yValueAxis.visibleSubTicks = 0
yValueAxis.visibleTicks = 1
yValueAxis.zrangePref = 0
```

## Functions

### `sample1a( ... )`

A line plot with non-equidistant points in x-axis.

#### *Example*

```
def sample1a():
    "A line plot with non-equidistant points in x-axis."

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()

    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = data
    lp.joinedLines = 1
    lp.strokeColor = colors.black

    lp.lines.symbol = makeMarker('UK_Flag')


    lp.lines[0].strokeWidth = 2
    lp.lines[1].strokeWidth = 4

    lp.xValueAxis.valueMin = 0
    lp.xValueAxis.valueMax = 5
    lp.xValueAxis.valueStep = 1

    lp.yValueAxis.valueMin = 0
    lp.yValueAxis.valueMax = 7
    lp.yValueAxis.valueStep = 1

    drawing.add(lp)

    return drawing
```

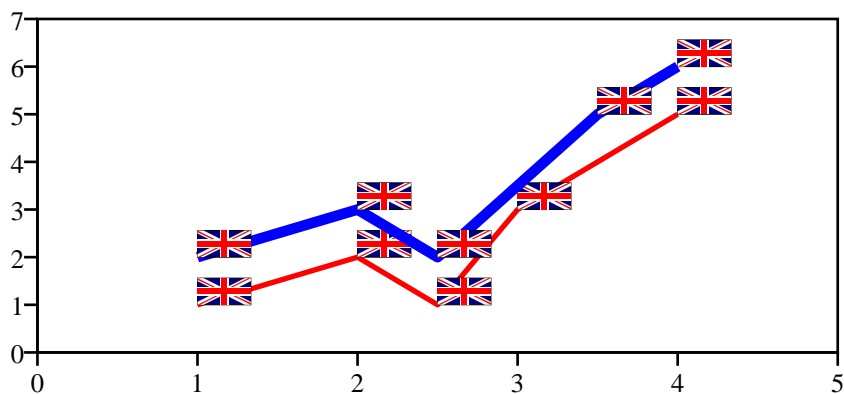

**sample1b( ... )**

A line plot with non-equidistant points in x-axis.

*Example*

```
def sample1b():
    "A line plot with non-equidistant points in x-axis."

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()

    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = data
    lp.joinedLines = 1
    lp.lines.symbol = makeMarker('Circle')
    lp.lineLabelFormat = '%2.0f'
    lp.strokeColor = colors.black

    lp.xValueAxis.valueMin = 0
    lp.xValueAxis.valueMax = 5
    lp.xValueAxis.valueSteps = [1, 2, 2.5, 3, 4, 5]
    lp.xValueAxis.labelTextFormat = '%2.1f'

    lp.yValueAxis.valueMin = 0
    lp.yValueAxis.valueMax = 7
    lp.yValueAxis.valueStep = 1

    drawing.add(lp)

    return drawing
```



**sample1c( ... )**

A line plot with non-equidistant points in x-axis.

*Example*

```
def sample1c():
    "A line plot with non-equidistant points in x-axis."

    drawing = Drawing(400, 200)

    data = [
        ((1,1), (2,2), (2.5,1), (3,3), (4,5)),
        ((1,2), (2,3), (2.5,2), (3.5,5), (4,6))
    ]

    lp = LinePlot()

    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = data
    lp.joinedLines = 1
    lp.lines[0].symbol = makeMarker('FilledCircle')
    lp.lines[1].symbol = makeMarker('Circle')
    lp.lineLabelFormat = '%2.0f'
    lp.strokeColor = colors.black

    lp.xValueAxis.valueMin = 0
    lp.xValueAxis.valueMax = 5
    lp.xValueAxis.valueSteps = [1, 2, 2.5, 3, 4, 5]
    lp.xValueAxis.labelTextFormat = '%2.1f'

    lp.yValueAxis.valueMin = 0
    lp.yValueAxis.valueMax = 7
    lp.yValueAxis.valueSteps = [1, 2, 3, 5, 6]

    drawing.add(lp)

    return drawing
```



**sample2( ... )**

A line plot with non-equidistant points in x-axis.

*Example*

```
def sample2():
    "A line plot with non-equidistant points in x-axis."

    drawing = Drawing(400, 200)

    data = [
        ('25/11/1991',1),
        ('30/11/1991',1.000933333),
        ('31/12/1991',1.0062),
        ('31/01/1992',1.0112),
        ('29/02/1992',1.0158),
        ('31/03/1992',1.020733333),
        ('30/04/1992',1.026133333),
        ('31/05/1992',1.030266667),
        ('30/06/1992',1.034466667),
        ('31/07/1992',1.038733333),
        ('31/08/1992',1.0422),
        ('30/09/1992',1.045533333),
        ('31/10/1992',1.049866667),
        ('30/11/1992',1.054733333),
        ('31/12/1992',1.061),
    ],
    ]

    data[0] = preprocessData(data[0])

    lp = LinePlot()


    lp.x = 50
    lp.y = 50
    lp.height = 125
    lp.width = 300
    lp.data = data
    lp.joinedLines = 1
    lp.lines.symbol = makeMarker('FilledDiamond')
    lp.strokeColor = colors.black

    start = mktime(mkTimeTuple('25/11/1991'))
    t0 = mktime(mkTimeTuple('30/11/1991'))
    t1 = mktime(mkTimeTuple('31/12/1991'))
    t2 = mktime(mkTimeTuple('31/03/1992'))
    t3 = mktime(mkTimeTuple('30/06/1992'))
    t4 = mktime(mkTimeTuple('30/09/1992'))
    end = mktime(mkTimeTuple('31/12/1992'))
    lp.xValueAxis.valueMin = start
    lp.xValueAxis.valueMax = end
    lp.xValueAxis.valueSteps = [start, t0, t1, t2, t3, t4, end]
    lp.xValueAxis.labelTextFormat = seconds2str
    lp.xValueAxis.labels[1].dy = -20
    lp.xValueAxis.labels[2].dy = -35

    lp.yValueAxis.labelTextFormat = '%4.2f'
    lp.yValueAxis.valueMin = 100
    lp.yValueAxis.valueMax = 110
    lp.yValueAxis.valueStep = 2

    drawing.add(lp)

    return drawing
```

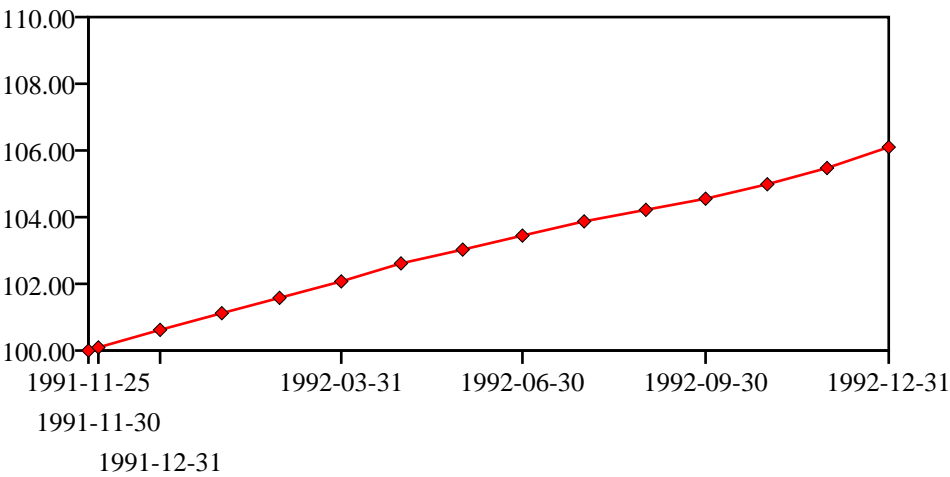



## axes

Collection of axes for charts.

The current collection comprises axes for charts using cartesian coordinate systems. All axes might have tick marks and labels. There are two dichotomies for axes: one of X and Y flavours and another of category and value flavours.

Category axes have an ordering but no metric. They are divided into a number of equal-sized buckets. Their tick marks or labels, if available, go BETWEEN the buckets, and the labels are placed below to/left of the X/Y-axis, respectively.

Value axes have an ordering AND metric. They correspond to a numeric quantity. Value axis have a real number quantity associated with it. The chart tells it where to go.

The most basic axis divides the number line into equal spaces and has tickmarks and labels associated with each; later we will add variants where you can specify the sampling interval.

The charts using axis tell them where the labels should be placed.

Axes of complementary X/Y flavours can be connected to each other in various ways, i.e. with a specific reference point, like an x/value axis to a y/value (or category) axis. In this case the connection can be either at the top or bottom of the former or at any absolute value (specified in points) or at some value of the former axes in its own coordinate system.

## Classes

### **AdjYValueAxis(YValueAxis)**

A Y-axis applying additional rules.

Depending on the data and some built-in rules, the axis may choose to adjust its range and origin.

## Public Attributes

**abf\_ignore\_zero** Set to True to make the avoidBoundFrac calculations treat zero as non-special

**annotations** list of annotations

**avoidBoundFrac** Fraction of interval to allow above and below.

**avoidBoundSpace** Space to allow above and below.

**drawGridLast** if true draw gridlines after everything else.

**forceZero** Ensure zero in range if true.

**gridEnd** End of grid lines wrt axis origin

**gridStart** Start of grid lines wrt axis origin

**gridStrokeColor** Color of grid lines.

**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**joinAxis** Join both axes if true.

**joinAxisMode** Mode used for connecting axis ('left', 'right', 'value', 'points', None).

**joinAxisPos** Position at which to join with other axis.

**keepTickLabelsInside** Ensure tick labels do not project beyond bounds of axis if true

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labelTextFormat** Formatting string or function used for axis labels.

**labelTextPostFormat** Extra Formatting string.

**labelTextScale** Scaling for label tick values.

**labelVOffset** add this to the labels

**labels** Handle of the axis labels.

**leftAxisOrigShiftIPC** Lowest label shift interval ratio.

**leftAxisOrigShiftMin** Minimum amount to shift.

**leftAxisPercent** When true add percent sign to label values.

**leftAxisSkipLL0** Skip/Keep lowest tick label when true/false. Or skiplist

**loLLen** extra line length before start of the axis

**maximumTicks** Maximum number of ticks.

**minimumTickSpacing** Minimum value for distance between ticks.

**origShiftIPC** Lowest label shift interval ratio.

**origShiftMin** Minimum amount to shift.

**origShiftSpecialValue** special value for shift

**rangeRound** How to round the axis limits

**requiredRange** Minimum required value range.

**reverseDirection** If true reverse category direction.

**skipEndL** Skip high/low tick labels

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeWidth** Width of axis line and ticks.

**style** How values are plotted!

**subGridEnd** End of grid lines wrt axis origin

**subGridStart** Start of grid lines wrt axis origin

**subGridStrokeColor** Color of grid lines.

**subGridStrokeDashArray** Dash array used for grid lines.

**subGridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**subGridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**subGridStrokeMiterLimit** Grid miter limit control miter line joins

**subGridStrokeWidth** Width of grid lines.

**subTickHi** sub tick up or right

**subTickLo** sub tick down or left

**subTickNum** Number of axis sub ticks, if >0

**tickAxisMode** Like joinAxisMode, but for the ticks

**tickLeft** Tick length left of the axis.

**tickRight** Tick length right of the axis.

**valueMax** Maximum value on axis.

**valueMin** Minimum value on axis.

**valueStep** Step size used between ticks.

**valueSteps** List of step sizes used between ticks.

**visible** Display entire object, if true.

**visibleAxis** Display axis line, if true.

**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleSubGrid** Display axis sub grid, if true.

**visibleSubTicks** Display axis sub ticks, if true.

**visibleTicks** Display axis ticks, if true.

**zrangePref** Zero range axis limit preference.

#### *Example*

```
def demo(self):
    data = [(10, 20, 30, 42)]
    self.setPosition(100, 10, 80)
    self.configure(data)

    drawing = Drawing(200, 100)
    drawing.add(self)
    return drawing
```

#### *Properties of Example Widget*

```
abf_ignore_zero = False
avoidBoundFrac = None
avoidBoundSpace = None
drawGridLast = False
forceZero = 0
gridEnd = None
gridStart = None
gridStrokeColor = Color(0,0,0,1)
gridStrokeDashArray = None
gridStrokeLineCap = 0
gridStrokeLineJoin = 0
gridStrokeMiterLimit = 10
```

```
gridStrokeWidth = 0.25
hiLLen = 0
joinAxis = None
joinAxisMode = None
joinAxisPos = None
keepTickLabelsInside = 0
labelAxisMode = 'axis'
labelTextFormat = None
labelTextPostFormat = None
labelTextScale = None
labelVOffset = 0
labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1849030>
leftAxisOrigShiftIPC = 0.15
leftAxisOrigShiftMin = 12
leftAxisPercent = 1
leftAxisSkipLL0 = 0
loLLen = 0
maximumTicks = 7
minimumTickSpacing = 10
origShiftIPC = None
origShiftMin = None
origShiftSpecialValue = None
rangeRound = 'none'
requiredRange = 30
reverseDirection = 0
skipEndL = 'none'
strokeColor = Color(0,0,0,1)
strokeDashArray = None
strokeLineCap = 0
strokeLineJoin = 0
strokeMiterLimit = 10
strokeWidth = 1
style = 'normal'
subGridEnd = None
subGridStart = None
subGridStrokeColor = Color(0,0,0,1)
subGridStrokeDashArray = None
subGridStrokeLineCap = 0
subGridStrokeLineJoin = 0
subGridStrokeMiterLimit = 10
subGridStrokeWidth = 0.25
subTickHi = 0
subTickLo = 0
subTickNum = 0
tickAxisMode = 'axis'
tickLeft = 5
tickRight = 0
valueMax = None
valueMin = None
valueStep = None
valueSteps = None
visible = 1
visibleAxis = 1
visibleGrid = 0
visibleLabels = 1
visibleSubGrid = 0
visibleSubTicks = 0
visibleTicks = 1
zrangePref = 0
```

## CALabel (Label)

### Public Attributes

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fontName** the name of the font used

**fontSize** the size of the font

**height** the height of the text

**labelPosFrac** where in the category range [0,1] the labels should be anchored

**leading**

**leftPadding** padding at left of box

**maxWidth** maximum width the label can grow to

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** the actual text to display

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x**

**y**

### Example

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""

    d = Drawing(200, 100)

    # mark the origin of the label
    d.add(Circle(100,90, 5, fillColor=colors.green))

    lab = Label()
    lab.setOrigin(100,90)
    lab.boxAnchor = 'ne'
    lab.angle = 45
    lab.dx = 0
```

```
lab.dy = -20
lab.boxStrokeColor = colors.green
lab.setText('Another\nMulti-Line\nString')
d.add(lab)

return d
```

### *Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
height = None
labelPosFrac = 0.5
leading = None
leftPadding = 0
maxWidth = None
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```

## **CategoryAxis(\_AxisG)**

Abstract category axis, unusable in itself.

### **Public Attributes**

**annotations** list of annotations

**categoryNames** List of category names.

**drawGridLast** if true draw gridlines after everything else.

**gridEnd** End of grid lines wrt axis origin

**gridStart** Start of grid lines wrt axis origin

**gridStrokeColor** Color of grid lines.

**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**hiPad** extra inner space after end of the axis

**joinAxis** Join both axes if true.

**joinAxisPos** Position at which to join with other axis.

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labels** Handle of the axis labels.

**loLLen** extra line length before start of the axis

**loPad** extra inner space before start of the axis

**reverseDirection** If true reverse category direction.

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeWidth** Width of axis line and ticks.

**style** How common category bars are plotted

**tickShift** Tick shift typically

**visible** Display entire object, if true.

**visibleAxis** Display axis line, if true.

**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleTicks** Display axis ticks, if true.

## **NormalDateXValueAxis(XValueAxis)**

An X axis applying additional rules.

Depending on the data and some built-in rules, the axis displays normalDate values as nicely formatted dates.

The client chart should have NormalDate X values.

### **Public Attributes**

**abf\_ignore\_zero** Set to True to make the avoidBoundFrac calculations treat zero as non-special

**annotations** list of annotations

**avoidBoundFrac** Fraction of interval to allow above and below.

**avoidBoundSpace** Space to allow above and below.

**bottomAxisLabelSlack** Fractional amount used to adjust label spacing

**dailyFreq** True if we are to assume daily data to be ticked at end of month.

**dayOfWeekName** Weekday names.

**drawGridLast** if true draw gridlines after everything else.

**forceDatesEachYear** List of dates in format "31-Dec", "1-Jan". If present they will always be used for tick marks in the current year, rather than the dates chosen by the automatic algorithm. Hyphen compulsory, case of month optional.

**forceEndDate** Flag for enforced displaying of last date value.

**forceFirstDate** Flag for enforced displaying of first date value.

**forceZero** Ensure zero in range if true.

**gridEnd** End of grid lines wrt axis origin

**gridStart** Start of grid lines wrt axis origin

**gridStrokeColor** Color of grid lines.

**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**joinAxis** Join both axes if true.

**joinAxisMode** Mode used for connecting axis ('bottom', 'top', 'value', 'points', None).

**joinAxisPos** Position at which to join with other axis.

**keepTickLabelsInside** Ensure tick labels do not project beyond bounds of axis if true

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labelTextFormat** Formatting string or function used for axis labels.

**labelTextPostFormat** Extra Formatting string.

**labelTextScale** Scaling for label tick values.



**labels** Handle of the axis labels.

**loLLen** extra line length before start of the axis

**maximumTicks** Maximum number of ticks.

**minimumTickSpacing** Minimum value for distance between ticks.

**monthName** Month names.

**niceMonth** Flag for displaying months 'nicely'.

**origShiftIPC** Lowest label shift interval ratio.

**origShiftMin** Minimum amount to shift.

**origShiftSpecialValue** special value for shift

**rangeRound** How to round the axis limits

**reverseDirection** If true reverse category direction.

**skipEndL** Skip high/low tick labels

**specialTickClear** clear rather than delete close ticks when forced first/end dates

**specifiedTickDates** Actual tick values to use; no calculations done

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeWidth** Width of axis line and ticks.

**style** How values are plotted!

**subGridEnd** End of grid lines wrt axis origin

**subGridStart** Start of grid lines wrt axis origin

**subGridStrokeColor** Color of grid lines.

**subGridStrokeDashArray** Dash array used for grid lines.

**subGridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**subGridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**subGridStrokeMiterLimit** Grid miter limit control miter line joins

**subGridStrokeWidth** Width of grid lines.

**subTickHi** sub tick up or right

**subTickLo** sub tick down or left

**subTickNum** Number of axis sub ticks, if >0

**tickAxisMode** Like joinAxisMode, but for the ticks

**tickDown** Tick length down the axis.

**tickUp** Tick length up the axis.

**valueMax** Maximum value on axis.

**valueMin** Minimum value on axis.

**valueStep** Step size used between ticks.

**valueSteps** List of step sizes used between ticks.

**visible** Display entire object, if true.

**visibleAxis** Display axis line, if true.

**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleSubGrid** Display axis sub grid, if true.

**visibleSubTicks** Display axis sub ticks, if true.

**visibleTicks** Display axis ticks, if true.

**xLabelFormat** Label format string (e.g. '{mm}/{yy}') or function.

**zrangePref** Zero range axis limit preference.

### *Example*

```
def demo(self):
    self.setPosition(20, 50, 150)
    self.configure([(10,20,30,40,50)])

    d = Drawing(200, 100)
    d.add(self)
    return d
```

### *Properties of Example Widget*

```
abf_ignore_zero = False
avoidBoundFrac = None
avoidBoundSpace = None
bottomAxisLabelSlack = 0.1
dailyFreq = 0
dayOfWeekName = ['Monday', 'Tuesday', 'Wednesday', 'Thursday', 'Friday', 'Saturday', 'Sunday']
drawGridLast = False
forceDatesEachYear = []
forceEndDate = 0
forceFirstDate = 0
forceZero = 0
gridEnd = None
gridStart = None
gridStrokeColor = Color(0,0,0,1)
gridStrokeDashArray = None
gridStrokeLineCap = 0
gridStrokeLineJoin = 0
gridStrokeMiterLimit = 10
gridStrokeWidth = 0.25
hiLlen = 0
joinAxis = None
joinAxisMode = None
joinAxisPos = None
keepTickLabelsInside = 0
labelAxisMode = 'axis'
labelTextFormat = None
labelTextPostFormat = None
labelTextScale = None
labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1863f08>
loLlen = 0
maximumTicks = 7
minimumTickSpacing = 10
monthName = ['January',
              'February',
              'March',
              'April',
              'May',
              'June',
              'July',
              'August',
              'September',
              'October',
              'November',
              'December']
```

```
niceMonth = 1
origShiftIPC = None
origShiftMin = None
origShiftSpecialValue = None
rangeRound = 'none'
reverseDirection = 0
skipEndL = 'none'
specialTickClear = 0
specifiedTickDates = None
strokeColor = Color(0,0,0,1)
strokeDashArray = None
strokeLineCap = 0
strokeLineJoin = 0
strokeMiterLimit = 10
strokeWidth = 1
style = 'normal'
subGridEnd = None
subGridStart = None
subGridStrokeColor = Color(0,0,0,1)
subGridStrokeDashArray = None
subGridStrokeLineCap = 0
subGridStrokeLineJoin = 0
subGridStrokeMiterLimit = 10
subGridStrokeWidth = 0.25
subTickHi = 0
subTickLo = 0
subTickNum = 0
tickAxisMode = 'axis'
tickDown = 5
tickUp = 0
valueMax = None
valueMin = None
valueStep = None
valueSteps = None
visible = 1
visibleAxis = 1
visibleGrid = 0
visibleLabels = 1
visibleSubGrid = 0
visibleSubTicks = 0
visibleTicks = 1
xlabelFormat = '{mm}/{yy}'
zrangePref = 0
```

## **ValueAxis(\_AxisG)**

Abstract value axis, unusable in itself.

### **Public Attributes**

**abf\_ignore\_zero** Set to True to make the avoidBoundFrac calculations treat zero as non-special

**annotations** list of annotations

**avoidBoundFrac** Fraction of interval to allow above and below.

**avoidBoundSpace** Space to allow above and below.

**drawGridLast** if true draw gridlines after everything else.

**forceZero** Ensure zero in range if true.

**gridEnd** End of grid lines wrt axis origin

**gridStart** Start of grid lines wrt axis origin

**gridStrokeColor** Color of grid lines.

**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**keepTickLabelsInside** Ensure tick labels do not project beyond bounds of axis if true

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labelTextFormat** Formatting string or function used for axis labels.

**labelTextPostFormat** Extra Formatting string.

**labelTextScale** Scaling for label tick values.

**labels** Handle of the axis labels.

**loLLen** extra line length before start of the axis

**maximumTicks** Maximum number of ticks.

**minimumTickSpacing** Minimum value for distance between ticks.

**origShiftIPC** Lowest label shift interval ratio.

**origShiftMin** Minimum amount to shift.

**origShiftSpecialValue** special value for shift

**rangeRound** How to round the axis limits

**reverseDirection** If true reverse category direction.

**skipEndL** Skip high/low tick labels

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins  
**strokeWidth** Width of axis line and ticks.  
**style** How values are plotted!  
**subGridEnd** End of grid lines wrt axis origin  
**subGridStart** Start of grid lines wrt axis origin  
**subGridStrokeColor** Color of grid lines.  
**subGridStrokeDashArray** Dash array used for grid lines.  
**subGridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square  
**subGridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel  
**subGridStrokeMiterLimit** Grid miter limit control miter line joins  
**subGridStrokeWidth** Width of grid lines.  
**subTickHi** sub tick up or right  
**subTickLo** sub tick down or left  
**subTickNum** Number of axis sub ticks, if >0  
**tickAxisMode** Like joinAxisMode, but for the ticks  
**valueMax** Maximum value on axis.  
**valueMin** Minimum value on axis.  
**valueStep** Step size used between ticks.  
**valueSteps** List of step sizes used between ticks.  
**visible** Display entire object, if true.  
**visibleAxis** Display axis line, if true.  
**visibleGrid** Display axis grid, if true.  
**visibleLabels** Display axis labels, if true.  
**visibleSubGrid** Display axis sub grid, if true.  
**visibleSubTicks** Display axis sub ticks, if true.  
**visibleTicks** Display axis ticks, if true.  
**zrangePref** Zero range axis limit preference.

## **XCategoryAxis(\_XTicks, CategoryAxis)**

X/category axis

### **Public Attributes**

**annotations** list of annotations  
**categoryNames** List of category names.  
**drawGridLast** if true draw gridlines after everything else.  
**gridEnd** End of grid lines wrt axis origin  
**gridStart** Start of grid lines wrt axis origin  
**gridStrokeColor** Color of grid lines.  
**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**hiPad** extra inner space after end of the axis

**joinAxis** Join both axes if true.

**joinAxisMode** Mode used for connecting axis ('bottom', 'top', 'value', 'points', None).

**joinAxisPos** Position at which to join with other axis.

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labels** Handle of the axis labels.

**loLLen** extra line length before start of the axis

**loPad** extra inner space before start of the axis

**reverseDirection** If true reverse category direction.

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeWidth** Width of axis line and ticks.

**style** How common category bars are plotted

**tickDown** Tick length down the axis.

**tickShift** Tick shift typically

**tickUp** Tick length up the axis.

**visible** Display entire object, if true.

**visibleAxis** Display axis line, if true.

**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleTicks** Display axis ticks, if true.

## **XValueAxis(\_XTicks, ValueAxis)**

X/value axis

### **Public Attributes**

**abf\_ignore\_zero** Set to True to make the avoidBoundFrac calculations treat zero as non-special

**annotations** list of annotations

**avoidBoundFrac** Fraction of interval to allow above and below.

**avoidBoundSpace** Space to allow above and below.

**drawGridLast** if true draw gridlines after everything else.

**forceZero** Ensure zero in range if true.

**gridEnd** End of grid lines wrt axis origin

**gridStart** Start of grid lines wrt axis origin

**gridStrokeColor** Color of grid lines.

**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**joinAxis** Join both axes if true.

**joinAxisMode** Mode used for connecting axis ('bottom', 'top', 'value', 'points', None).

**joinAxisPos** Position at which to join with other axis.

**keepTickLabelsInside** Ensure tick labels do not project beyond bounds of axis if true

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labelTextFormat** Formatting string or function used for axis labels.

**labelTextPostFormat** Extra Formatting string.

**labelTextScale** Scaling for label tick values.

**labels** Handle of the axis labels.

**loLLen** extra line length before start of the axis

**maximumTicks** Maximum number of ticks.

**minimumTickSpacing** Minimum value for distance between ticks.

**origShiftIPC** Lowest label shift interval ratio.

**origShiftMin** Minimum amount to shift.

**origShiftSpecialValue** special value for shift

**rangeRound** How to round the axis limits

**reverseDirection** If true reverse category direction.

**skipEndL** Skip high/low tick labels

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeWidth** Width of axis line and ticks.

**style** How values are plotted!

**subGridEnd** End of grid lines wrt axis origin

**subGridStart** Start of grid lines wrt axis origin

**subGridStrokeColor** Color of grid lines.

**subGridStrokeDashArray** Dash array used for grid lines.

**subGridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**subGridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**subGridStrokeMiterLimit** Grid miter limit control miter line joins

**subGridStrokeWidth** Width of grid lines.

**subTickHi** sub tick up or right

**subTickLo** sub tick down or left

**subTickNum** Number of axis sub ticks, if >0

**tickAxisMode** Like joinAxisMode, but for the ticks

**tickDown** Tick length down the axis.

**tickUp** Tick length up the axis.

**valueMax** Maximum value on axis.

**valueMin** Minimum value on axis.

**valueStep** Step size used between ticks.

**valueSteps** List of step sizes used between ticks.

**visible** Display entire object, if true.

**visibleAxis** Display axis line, if true.

**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleSubGrid** Display axis sub grid, if true.

**visibleSubTicks** Display axis sub ticks, if true.

**visibleTicks** Display axis ticks, if true.

**zrangePref** Zero range axis limit preference.

#### *Example*

```
def demo(self):
    self.setPosition(20, 50, 150)
    self.configure([(10,20,30,40,50)])

    d = Drawing(200, 100)
    d.add(self)
    return d
```

#### *Properties of Example Widget*

```
abf_ignore_zero = False
avoidBoundFrac = None
avoidBoundSpace = None
drawGridLast = False
forceZero = 0
gridEnd = None
gridStart = None
gridStrokeColor = Color(0,0,0,1)
gridStrokeDashArray = None
gridStrokeLineCap = 0
gridStrokeLineJoin = 0
gridStrokeMiterLimit = 10
gridStrokeWidth = 0.25
hiLen = 0
joinAxis = None
```



```
joinAxisMode = None
joinAxisPos = None
keepTickLabelsInside = 0
labelAxisMode = 'axis'
labelTextFormat = None
labelTextPostFormat = None
labelTextScale = None
labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x18c38f0>
loLLen = 0
maximumTicks = 7
minimumTickSpacing = 10
origShiftIPC = None
origShiftMin = None
origShiftSpecialValue = None
rangeRound = 'none'
reverseDirection = 0
skipEndL = 'none'
strokeColor = Color(0,0,0,1)
strokeDashArray = None
strokeLineCap = 0
strokeLineJoin = 0
strokeMiterLimit = 10
strokeWidth = 1
style = 'normal'
subGridEnd = None
subGridStart = None
subGridStrokeColor = Color(0,0,0,1)
subGridStrokeDashArray = None
subGridStrokeLineCap = 0
subGridStrokeLineJoin = 0
subGridStrokeMiterLimit = 10
subGridStrokeWidth = 0.25
subTickHi = 0
subTickLo = 0
subTickNum = 0
tickAxisMode = 'axis'
tickDown = 5
tickUp = 0
valueMax = None
valueMin = None
valueStep = None
visible = 1
visibleAxis = 1
visibleGrid = 0
visibleLabels = 1
visibleSubGrid = 0
visibleSubTicks = 0
visibleTicks = 1
zrangePref = 0
```

**YCategoryAxis(\_YTicks, CategoryAxis)**

Y/category axis

**Public Attributes****annotations** list of annotations**categoryNames** List of category names.**drawGridLast** if true draw gridlines after everything else.**gridEnd** End of grid lines wrt axis origin**gridStart** Start of grid lines wrt axis origin**gridStrokeColor** Color of grid lines.**gridStrokeDashArray** Dash array used for grid lines.**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel**gridStrokeMiterLimit** Grid miter limit control miter line joins**gridStrokeWidth** Width of grid lines.**hiLLen** extra line length after end of the axis**hiPad** extra inner space after end of the axis**joinAxis** Join both axes if true.**joinAxisMode** Mode used for connecting axis ('left', 'right', 'value', 'points', None).**joinAxisPos** Position at which to join with other axis.**labelAxisMode** Like joinAxisMode, but for the axis labels**labels** Handle of the axis labels.**loLLen** extra line length before start of the axis**loPad** extra inner space before start of the axis**reverseDirection** If true reverse category direction.**strokeColor** Color of axis line and ticks.**strokeDashArray** Dash array used for axis line.**strokeLineCap** Line cap 0=butt, 1=round 2=square**strokeLineJoin** Line join 0=miter, 1=round 2=bevel**strokeMiterLimit** miter limit control miter line joins**strokeWidth** Width of axis line and ticks.**style** How common category bars are plotted**tickLeft** Tick length left of the axis.**tickRight** Tick length right of the axis.**tickShift** Tick shift typically**visible** Display entire object, if true.**visibleAxis** Display axis line, if true.**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleTicks** Display axis ticks, if true.

## **YValueAxis(\_YTicks, ValueAxis)**

Y/value axis

### **Public Attributes**

**abf\_ignore\_zero** Set to True to make the avoidBoundFrac calculations treat zero as non-special

**annotations** list of annotations

**avoidBoundFrac** Fraction of interval to allow above and below.

**avoidBoundSpace** Space to allow above and below.

**drawGridLast** if true draw gridlines after everything else.

**forceZero** Ensure zero in range if true.

**gridEnd** End of grid lines wrt axis origin

**gridStart** Start of grid lines wrt axis origin

**gridStrokeColor** Color of grid lines.

**gridStrokeDashArray** Dash array used for grid lines.

**gridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**gridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**gridStrokeMiterLimit** Grid miter limit control miter line joins

**gridStrokeWidth** Width of grid lines.

**hiLLen** extra line length after end of the axis

**joinAxis** Join both axes if true.

**joinAxisMode** Mode used for connecting axis ('left', 'right', 'value', 'points', None).

**joinAxisPos** Position at which to join with other axis.

**keepTickLabelsInside** Ensure tick labels do not project beyond bounds of axis if true

**labelAxisMode** Like joinAxisMode, but for the axis labels

**labelTextFormat** Formatting string or function used for axis labels.

**labelTextPostFormat** Extra Formatting string.

**labelTextScale** Scaling for label tick values.

**labels** Handle of the axis labels.

**loLLen** extra line length before start of the axis

**maximumTicks** Maximum number of ticks.

**minimumTickSpacing** Minimum value for distance between ticks.

**origShiftIPC** Lowest label shift interval ratio.

**origShiftMin** Minimum amount to shift.

**origShiftSpecialValue** special value for shift

**rangeRound** How to round the axis limits

**reverseDirection** If true reverse category direction.

**skipEndL** Skip high/low tick labels

**strokeColor** Color of axis line and ticks.

**strokeDashArray** Dash array used for axis line.

**strokeLineCap** Line cap 0=butt, 1=round 2=square

**strokeLineJoin** Line join 0=miter, 1=round 2=bevel

**strokeMiterLimit** miter limit control miter line joins

**strokeWidth** Width of axis line and ticks.

**style** How values are plotted!

**subGridEnd** End of grid lines wrt axis origin

**subGridStart** Start of grid lines wrt axis origin

**subGridStrokeColor** Color of grid lines.

**subGridStrokeDashArray** Dash array used for grid lines.

**subGridStrokeLineCap** Grid Line cap 0=butt, 1=round 2=square

**subGridStrokeLineJoin** Grid Line join 0=miter, 1=round 2=bevel

**subGridStrokeMiterLimit** Grid miter limit control miter line joins

**subGridStrokeWidth** Width of grid lines.

**subTickHi** sub tick up or right

**subTickLo** sub tick down or left

**subTickNum** Number of axis sub ticks, if >0

**tickAxisMode** Like joinAxisMode, but for the ticks

**tickLeft** Tick length left of the axis.

**tickRight** Tick length right of the axis.

**valueMax** Maximum value on axis.

**valueMin** Minimum value on axis.

**valueStep** Step size used between ticks.

**valueSteps** List of step sizes used between ticks.

**visible** Display entire object, if true.

**visibleAxis** Display axis line, if true.

**visibleGrid** Display axis grid, if true.

**visibleLabels** Display axis labels, if true.

**visibleSubGrid** Display axis sub grid, if true.

**visibleSubTicks** Display axis sub ticks, if true.

**visibleTicks** Display axis ticks, if true.

**zrangePref** Zero range axis limit preference.

#### *Example*

```
def demo(self):
    data = [(10, 20, 30, 42)]
    self.setPosition(100, 10, 80)
```

```
self.configure(data)

drawing = Drawing(200, 100)
drawing.add(self)
return drawing
```

### *Properties of Example Widget*

```
abf_ignore_zero = False
avoidBoundFrac = None
avoidBoundSpace = None
drawGridLast = False
forceZero = 0
gridEnd = None
gridStart = None
gridStrokeColor = Color(0,0,0,1)
gridStrokeDashArray = None
gridStrokeLineCap = 0
gridStrokeLineJoin = 0
gridStrokeMiterLimit = 10
gridStrokeWidth = 0.25
hiLen = 0
joinAxis = None
joinAxisMode = None
joinAxisPos = None
keepTickLabelsInside = 0
labelAxisMode = 'axis'
labelTextFormat = None
labelTextPostFormat = None
labelTextScale = None
labels = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x18dc0d0>
loLen = 0
maximumTicks = 7
minimumTickSpacing = 10
origShiftIPC = None
origShiftMin = None
origShiftSpecialValue = None
rangeRound = 'none'
reverseDirection = 0
skipEndL = 'none'
strokeColor = Color(0,0,0,1)
strokeDashArray = None
strokeLineCap = 0
strokeLineJoin = 0
strokeMiterLimit = 10
strokeWidth = 1
style = 'normal'
subGridEnd = None
subGridStart = None
subGridStrokeColor = Color(0,0,0,1)
subGridStrokeDashArray = None
subGridStrokeLineCap = 0
subGridStrokeLineJoin = 0
subGridStrokeMiterLimit = 10
subGridStrokeWidth = 0.25
subTickHi = 0
subTickLo = 0
subTickNum = 0
tickAxisMode = 'axis'
tickLeft = 5
tickRight = 0
valueMax = None
valueMin = None
valueStep = None
visible = 1
visibleAxis = 1
visibleGrid = 0
visibleLabels = 1
visibleSubGrid = 0
visibleSubTicks = 0
visibleTicks = 1
zrangePref = 0
```

## **`_AxisG(Widget)`**

### **Public Attributes**

#### *Example*

```
def demo(self):  
    msg = "demo() must be implemented for each Widget!"  
    raise shapes.NotImplementedError, msg
```

#### *Properties of Example Widget*

## Functions

### **sample0a( ... )**

Sample drawing with one xcat axis and two buckets.


#### *Example*

```
def sample0a():
    "Sample drawing with one xcat axis and two buckets."

    drawing = Drawing(400, 200)

    data = [(10, 20)]

    xAxis = XCategoryAxis()
    xAxis.setPosition(75, 75, 300)
    xAxis.configure(data)
    xAxis.categoryNames = ['Ying', 'Yang']
    xAxis.labels.boxAnchor = 'n'
    drawing.add(xAxis)
    return drawing
```



**sample0b( ... )**

Sample drawing with one xcat axis and one bucket only.


*Example*

```
def sample0b():
    "Sample drawing with one xcat axis and one bucket only."

    drawing = Drawing(400, 200)

    data = [(10,)]

    xAxis = XCategoryAxis()
    xAxis.setPosition(75, 75, 300)
    xAxis.configure(data)
    xAxis.categoryNames = ['Ying']
    xAxis.labels.boxAnchor = 'n'
    drawing.add(xAxis)
    return drawing
```






**sample1( ... )**

Sample drawing containing two unconnected axes.

*Example*

```
def sample1():
    "Sample drawing containing two unconnected axes."
    from reportlab.graphics.shapes import _baseGFontNameB
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XCategoryAxis()
    xAxis.setPosition(75, 75, 300)
    xAxis.configure(data)
    xAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    xAxis.labels.boxAnchor = 'n'
    xAxis.labels[3].dy = -15
    xAxis.labels[3].angle = 30
    xAxis.labels[3].fontName = _baseGFontNameB
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

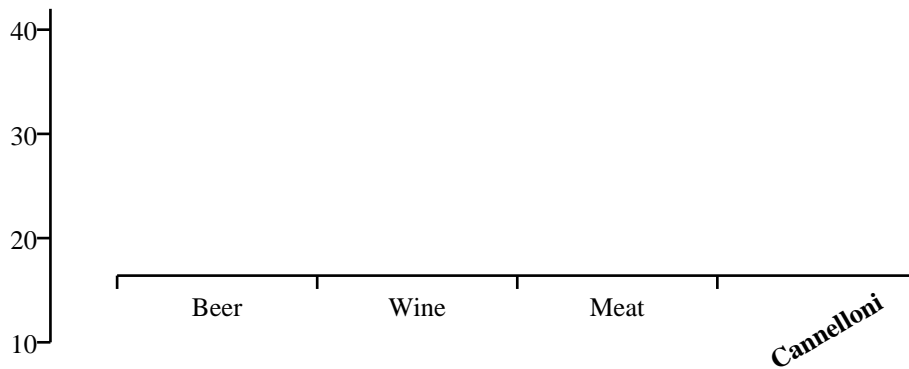


**sample4a( ... )**

Sample drawing, xvalue/yvalue axes, y connected at 100 pts to x.

*Example*

```
def sample4a():
    "Sample drawing, xvalue/yvalue axes, y connected at 100 pts to x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'points'
    xAxis.joinAxisPos = 100
    xAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

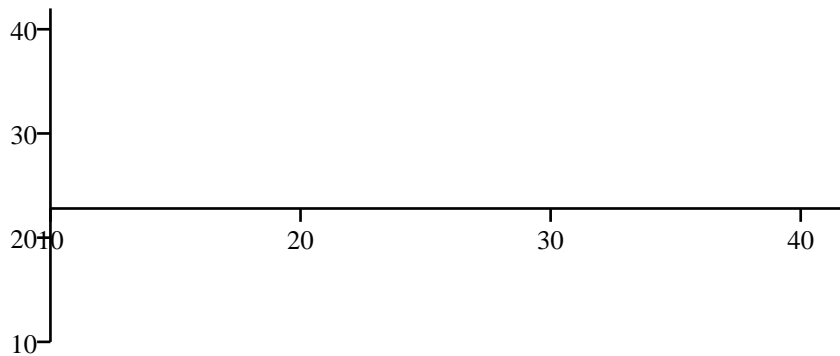

**sample4b( ... )**

Sample drawing, xvalue/yvalue axes, y connected at value 35 of x.

*Example*

```
def sample4b():
    "Sample drawing, xvalue/yvalue axes, y connected at value 35 of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'value'
    xAxis.joinAxisPos = 35
    xAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```




**sample4c( ... )**

Sample drawing, xvalue/yvalue axes, y connected to bottom of x.

*Example*

```
def sample4c():
    "Sample drawing, xvalue/yvalue axes, y connected to bottom of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'bottom'
    xAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

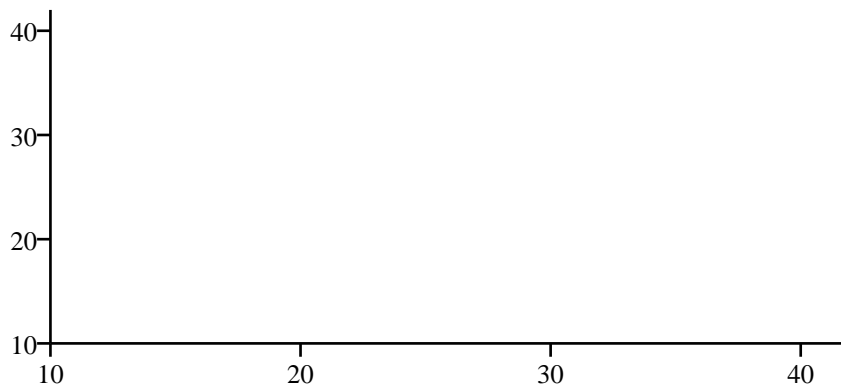

**sample4c1( ... )**

xvalue/yvalue axes, without drawing axis lines/ticks.

*Example*

```
def sample4c1():
    "xvalue/yvalue axes, without drawing axis lines/ticks."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    yAxis.visibleAxis = 0
    yAxis.visibleTicks = 0
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'bottom'
    xAxis.configure(data)
    xAxis.visibleAxis = 0
    xAxis.visibleTicks = 0
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

40

30

20

10

10

20

30


40

**sample4d( ... )**

Sample drawing, xvalue/yvalue axes, y connected to top of x.

*Example*

```
def sample4d():
    "Sample drawing, xvalue/yvalue axes, y connected to top of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'top'
    xAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

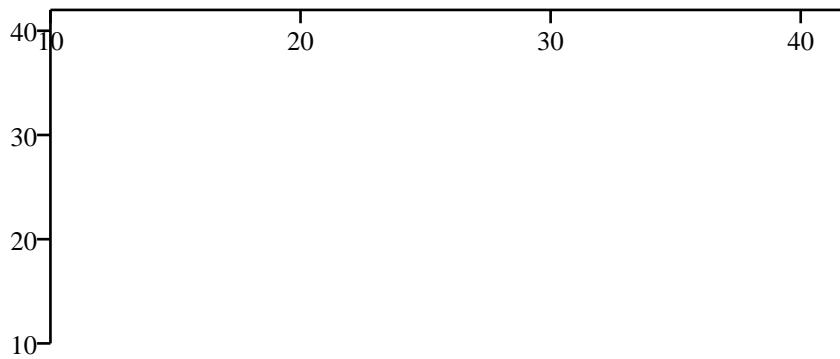

**sample5a( ... )**

Sample drawing, xvalue/yvalue axes, y connected at 100 pts to x.

*Example*

```
def sample5a():
    "Sample drawing, xvalue/yvalue axes, y connected at 100 pts to x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis.setPosition(50, 50, 300)
    xAxis.configure(data)
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'points'
    yAxis.joinAxisPos = 100
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```




**sample5b( ... )**

Sample drawing, xvalue/yvalue axes, y connected at value 35 of x.

*Example*

```
def sample5b():
    "Sample drawing, xvalue/yvalue axes, y connected at value 35 of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis.setPosition(50, 50, 300)
    xAxis.configure(data)
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'value'
    yAxis.joinAxisPos = 35
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

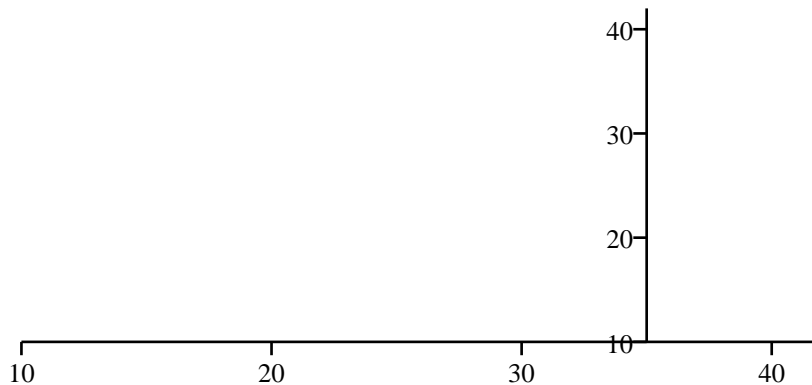




**sample5c( ... )**

Sample drawing, xvalue/yvalue axes, y connected at right of x.

*Example*

```
def sample5c():
    "Sample drawing, xvalue/yvalue axes, y connected at right of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis.setPosition(50, 50, 300)
    xAxis.configure(data)
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'right'
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

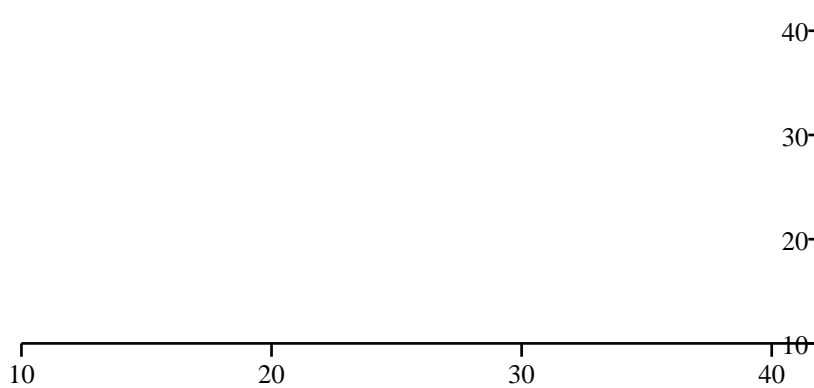


**sample5d( ... )**

Sample drawing, xvalue/yvalue axes, y connected at left of x.

*Example*

```
def sample5d():
    "Sample drawing, xvalue/yvalue axes, y connected at left of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis.setPosition(50, 50, 300)
    xAxis.configure(data)
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'left'
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

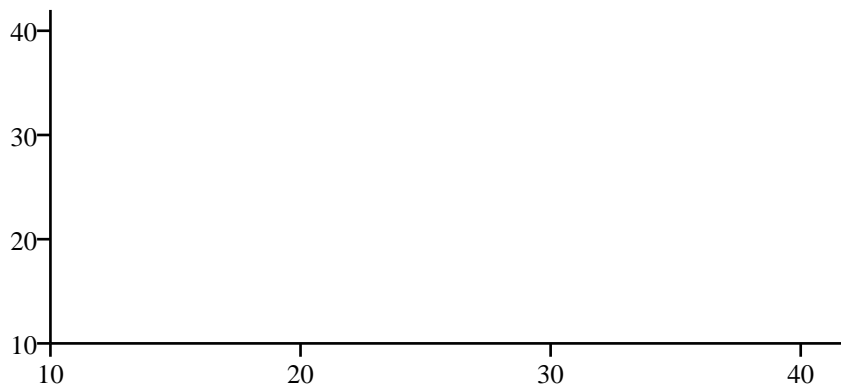


**sample6a( ... )**

Sample drawing, xcat/yvalue axes, x connected at top of y.

*Example*

```
def sample6a():
    "Sample drawing, xcat/yvalue axes, x connected at top of y."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XCategoryAxis()
    xAxis._length = 300
    xAxis.configure(data)
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'top'
    xAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    xAxis.labels.boxAnchor = 'n'
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

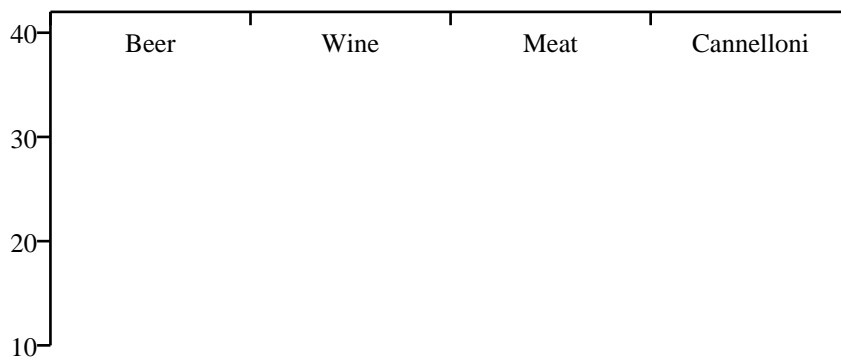


**sample6b( ... )**

Sample drawing, xcat/yvalue axes, x connected at bottom of y.

*Example*

```
def sample6b():
    "Sample drawing, xcat/yvalue axes, x connected at bottom of y."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XCategoryAxis()
    xAxis._length = 300
    xAxis.configure(data)
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'bottom'
    xAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    xAxis.labels.boxAnchor = 'n'
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

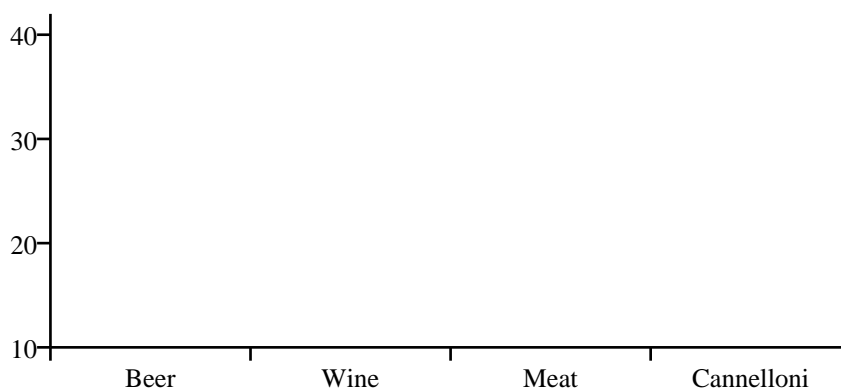


**sample6c( ... )**

Sample drawing, xcat/yvalue axes, x connected at 100 pts to y.

*Example*

```
def sample6c():
    "Sample drawing, xcat/yvalue axes, x connected at 100 pts to y."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XCategoryAxis()
    xAxis._length = 300
    xAxis.configure(data)
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'points'
    xAxis.joinAxisPos = 100
    xAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    xAxis.labels.boxAnchor = 'n'
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

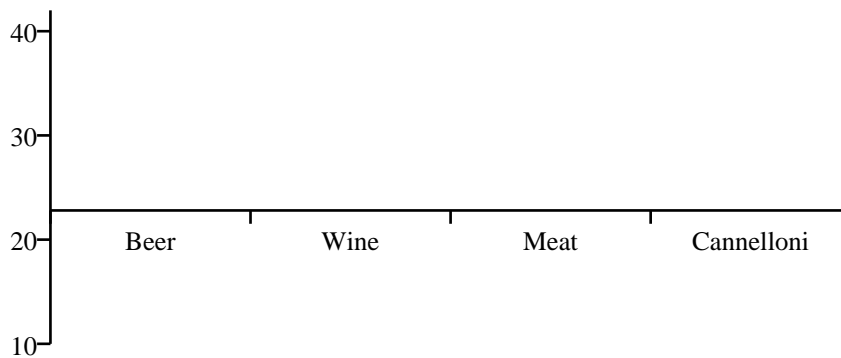


**sample6d( ... )**

Sample drawing, xcat/yvalue axes, x connected at value 20 of y.

*Example*

```
def sample6d():
    "Sample drawing, xcat/yvalue axes, x connected at value 20 of y."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    yAxis = YValueAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.configure(data)
    xAxis = XCategoryAxis()
    xAxis._length = 300
    xAxis.configure(data)
    xAxis.joinAxis = yAxis
    xAxis.joinAxisMode = 'value'
    xAxis.joinAxisPos = 20
    xAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    xAxis.labels.boxAnchor = 'n'
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

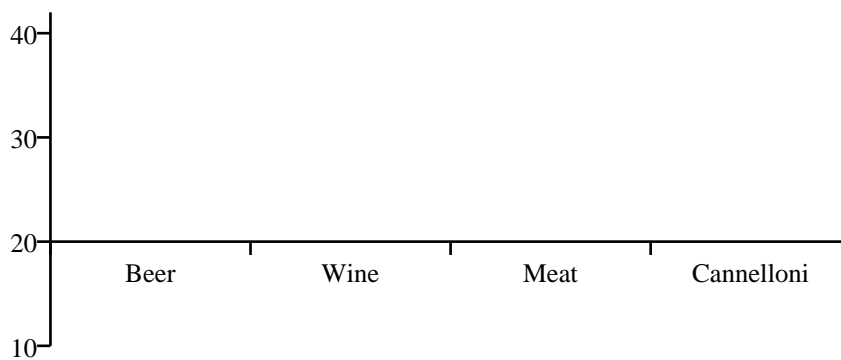


**sample7a( ... )**

Sample drawing, xvalue/ycat axes, y connected at right of x.

*Example*

```
def sample7a():
    "Sample drawing, xvalue/ycat axes, y connected at right of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.configure(data)
    yAxis = YCategoryAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'right'
    yAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    yAxis.labels.boxAnchor = 'e'
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

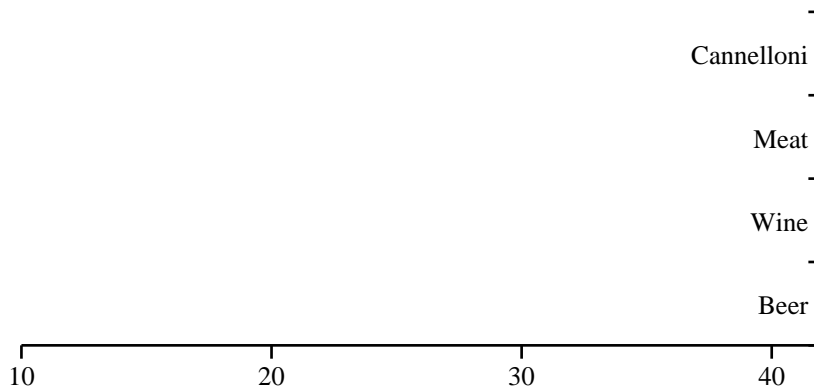


**sample7b( ... )**

Sample drawing, xvalue/ycat axes, y connected at left of x.

*Example*

```
def sample7b():
    "Sample drawing, xvalue/ycat axes, y connected at left of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.configure(data)
    yAxis = YCategoryAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'left'
    yAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    yAxis.labels.boxAnchor = 'e'
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

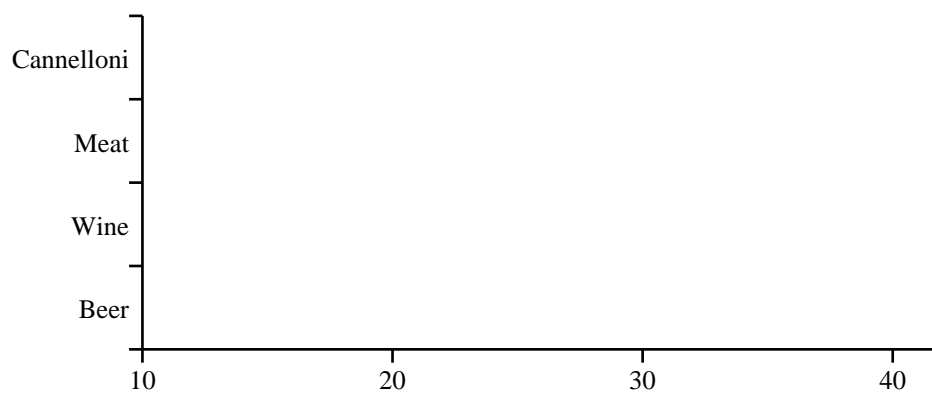




**sample7c( ... )**

Sample drawing, xvalue/ycat axes, y connected at value 30 of x.

*Example*

```
def sample7c():
    "Sample drawing, xvalue/ycat axes, y connected at value 30 of x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.configure(data)
    yAxis = YCategoryAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'value'
    yAxis.joinAxisPos = 30
    yAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    yAxis.labels.boxAnchor = 'e'
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

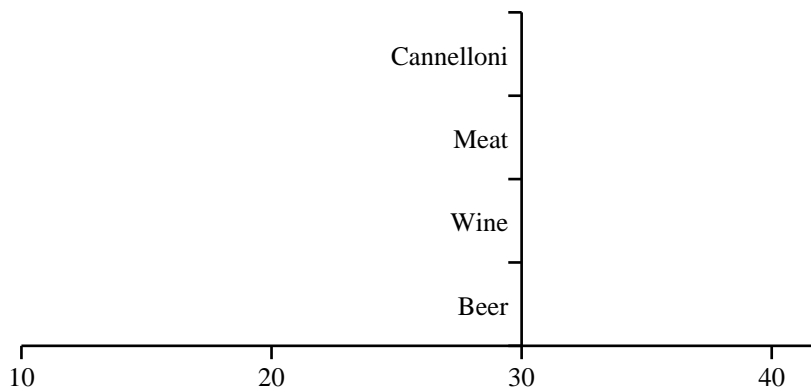


**sample7d( ... )**

Sample drawing, xvalue/ycat axes, y connected at 200 pts to x.

*Example*

```
def sample7d():
    "Sample drawing, xvalue/ycat axes, y connected at 200 pts to x."
    drawing = Drawing(400, 200)
    data = [(10, 20, 30, 42)]
    xAxis = XValueAxis()
    xAxis._length = 300
    xAxis.configure(data)
    yAxis = YCategoryAxis()
    yAxis.setPosition(50, 50, 125)
    yAxis.joinAxis = xAxis
    yAxis.joinAxisMode = 'points'
    yAxis.joinAxisPos = 200
    yAxis.categoryNames = ['Beer', 'Wine', 'Meat', 'Cannelloni']
    yAxis.labels.boxAnchor = 'e'
    yAxis.configure(data)
    drawing.add(xAxis)
    drawing.add(yAxis)
    return drawing
```

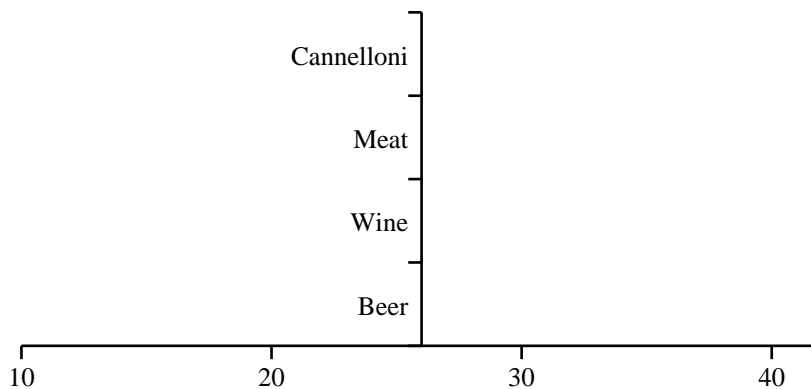

## areas

This module defines a Area mixin classes

## Classes

### PlotArea(Widget)

Abstract base class representing a chart's plot area, pretty unusable by itself.

## Public Attributes

**background** Handle to background object e.g. Rect(0,0,width,height).

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**width** Width of the chart.

**x** X position of the lower-left corner of the chart.

**y** Y position of the lower-left corner of the chart.

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
background = None
debug = 0
fillColor = None
height = 85
strokeColor = None
strokeWidth = 1
width = 180
x = 20
y = 10
```

## markers

This modules defines a collection of markers used in charts.

## Classes

### Marker (Widget )

A polymorphic class of markers

### Public Attributes

**angle** marker rotation

**arrowBarbDx** arrow only the delta x for the barbs

**arrowHeight** arrow only height

**dx** marker x coordinate adjustment

**dy** marker y coordinate adjustment

**fillColor** marker fill colour

**kind** marker type name

**size** marker size

**strokeColor** marker stroke colour

**strokeWidth** marker stroke width

**x** marker x coordinate

**y** marker y coordinate

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
angle = 0
arrowBarbDx = -1.25
arrowHeight = 1.875
dx = 0
dy = 0
fillColor = None
kind = None
size = 5
strokeColor = Color(0,0,0,1)
strokeWidth = 0.1
x = 0
y = 0
```

## legends

This will be a collection of legends to be used with charts.

## Classes

### Legend(Widget)

A simple legend containing rectangular swatches and strings.

The swatches are filled rectangles whenever the respective color object in 'colorNamePairs' is a subclass of Color in reportlab.lib.colors. Otherwise the object passed instead is assumed to have 'x', 'y', 'width' and 'height' attributes. A legend then tries to set them or catches any error. This lets you plug-in any widget you like as a replacement for the default rectangular swatches.

Strings can be nicely aligned left or right to the swatches.

### Public Attributes

**alignment** Alignment of text with respect to swatches

**autoXPadding** x Padding between columns if deltax=None

**autoYPadding** y Padding between rows if deltay=None

**boxAnchor** Anchor point for the legend area

**callout** a user callout(self,g,x,y,(color,text))

**colEndCallout** a user callout(self,g, x, xt, y,width, lWidth)

**colorNamePairs** List of color/name tuples (color can also be widget)

**columnMaximum** Max. number of items per column

**deltax** x-distance between neighbouring swatches

**deltay** y-distance between neighbouring swatches

**dividerColor** dividerLines color

**dividerDashArray** Dash array for dividerLines.

**dividerLines** If 1 we have dividers between the rows | 2 for extra top | 4 for bottom

**dividerOffsX** divider lines X offsets

**dividerOffsY** dividerLines Y offset

**dividerWidth** dividerLines width

**dx** Width of swatch rectangle

**dxTextSpace** Distance between swatch rectangle and text

**dy** Height of swatch rectangle

**fillColor** swatches filling color

**fontName** Font name of the strings

**fontSize** Font size of the strings

**strokeColor** Border color of the swatches

**strokeWidth** Width of the border color of the swatches

**subCols** subColumn properties

**swatchCallout** a user swatch callout(self,g,x,y,i,(col,name),swatch)

**swatchMarker** None, Auto() or makeMarker('Diamond') ...

**swdx** x position adjustment for the swatch

**swdy** y position adjustment for the swatch

**variColumn** If true column widths may vary (default is false)

**x** x-coordinate of upper-left reference point

**y** y-coordinate of upper-left reference point

**yGap** Additional gap between rows

### *Example*

```
def demo(self):
    "Make sample legend."

    d = Drawing(200, 100)

    legend = Legend()
    legend.alignment = 'left'
    legend.x = 0
    legend.y = 100
    legend.dxTextSpace = 5
    items = 'red green blue yellow pink black white'.split()
    items = map(lambda i:(getattr(colors, i), i), items)
    legend.colorNamePairs = items

    d.add(legend, 'legend')

    return d
```

### *Properties of Example Widget*

```
alignment = 'left'
autoXPadding = 5
autoYPadding = 2
boxAnchor = 'nw'
colEndCallout = None
colorNamePairs = [(Color(1,0,0,1), 'red'),
                  (Color(0,0,1,1), 'blue'),
                  (Color(0,.501961,0,1), 'green'),
                  (Color(1,.752941,.796078,1), 'pink'),
                  (Color(1,1,0,1), 'yellow')]
columnMaximum = 3
deltax = 75
deltay = 20
dividerColor = Color(0,0,0,1)
dividerDashArray = None
dividerLines = 0
dividerOffsX = (0, 0)
dividerOffsY = 0
dividerWidth = 0.5
dx = 10
dxTextSpace = 10
dy = 10
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
strokeColor = Color(0,0,0,1)
strokeWidth = 1
subCols = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x19733f0>
swatchMarker = None
swdx = 0
swdy = 0
variColumn = 0
```

```
x = 0  
y = 0  
yGap = 0
```

## LineLegend ( Legend )

A subclass of Legend for drawing legends with lines as the swatches rather than rectangles. Useful for lineCharts and linePlots. Should be similar in all other ways the the standard Legend class.

### Public Attributes

**alignment** Alignment of text with respect to swatches  
**autoXPadding** x Padding between columns if deltax=None  
**autoYPadding** y Padding between rows if deltay=None  
**boxAnchor** Anchor point for the legend area  
**callout** a user callout(self,g,x,y,(color,text))  
**colEndCallout** a user callout(self,g, x, xt, y,width, lWidth)  
**colorNamePairs** List of color/name tuples (color can also be widget)  
**columnMaximum** Max. number of items per column  
**deltax** x-distance between neighbouring swatches  
**deltay** y-distance between neighbouring swatches  
**dividerColor** dividerLines color  
**dividerDashArray** Dash array for dividerLines.  
**dividerLines** If 1 we have dividers between the rows | 2 for extra top | 4 for bottom  
**dividerOffsX** divider lines X offsets  
**dividerOffsY** dividerLines Y offset  
**dividerWidth** dividerLines width  
**dx** Width of swatch rectangle  
**dxTextSpace** Distance between swatch rectangle and text  
**dy** Height of swatch rectangle  
**fillColor** swatches filling color  
**fontName** Font name of the strings  
**fontSize** Font size of the strings  
**strokeColor** Border color of the swatches  
**strokeWidth** Width of the border color of the swatches  
**subCols** subColumn properties  
**swatchCallout** a user swatch callout(self,g,x,y,i,(col,name),swatch)  
**swatchMarker** None, Auto() or makeMarker('Diamond') ...  
**swdx** x position adjustment for the swatch  
**swdy** y position adjustment for the swatch  
**variColumn** If true column widths may vary (default is false)  
**x** x-coordinate of upper-left reference point  
**y** y-coordinate of upper-left reference point



**yGap** Additional gap between rows*Example*

```
def demo(self):
    "Make sample legend."

    d = Drawing(200, 100)

    legend = Legend()
    legend.alignment = 'left'
    legend.x = 0
    legend.y = 100
    legend.dxTextSpace = 5
    items = 'red green blue yellow pink black white'.split()
    items = map(lambda i:(getattr(colors, i), i), items)
    legend.colorNamePairs = items

    d.add(legend, 'legend')

    return d
```

*Properties of Example Widget*

```
alignment = 'left'
autoXPadding = 5
autoYPadding = 2
boxAnchor = 'nw'
colEndCallout = None
colorNamePairs = [(Color(1,0,0,1), 'red'),
                  (Color(0,0,1,1), 'blue'),
                  (Color(0,.501961,0,1), 'green'),
                  (Color(1,.752941,.796078,1), 'pink'),
                  (Color(1,1,0,1), 'yellow')]
columnMaximum = 3
deltax = 75
deltay = 20
dividerColor = Color(0,0,0,1)
dividerDashArray = None
dividerLines = 0
dividerOffsX = (0, 0)
dividerOffsY = 0
dividerWidth = 0.5
dx = 10
dxTextSpace = 10
dy = 2
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
strokeColor = Color(0,0,0,1)
strokeWidth = 1
subCols = <reportlab.graphics.widgetbase.TypedPropertyCollection instance at 0x1977e40>
swatchMarker = None
swdx = 0
swdy = 0
variColumn = 0
x = 0
y = 0
yGap = 0
```

## LineSwatch(Widget)

basically a Line with properties added so it can be used in a LineLegend

### Public Attributes

**height** used for line strokeWidth

**strokeColor** color of swatch line

**strokeDashArray** dash array for swatch line

**width** length of swatch line

**x** x-coordinate for swatch line start point

**y** y-coordinate for swatch line start point

### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### Properties of Example Widget

```
height = 1
strokeColor = Color(1,0,0,1)
strokeDashArray = None
width = 20
x = 0
y = 0
```

## Functions

### `sample1c( ... )`

Make sample legend.

#### *Example*








```
def sample1c():
    "Make sample legend."

    d = Drawing(200, 100)

    legend = Legend()
    legend.alignment = 'right'
    legend.x = 0
    legend.y = 100
    legend.dxTextSpace = 5
    items = 'red green blue yellow pink black white'.split()
    items = map(lambda i:(getattr(colors, i), i), items)
    legend.colorNamePairs = items

    d.add(legend, 'legend')

    return d
```

 red	 yellow	 white
 green	 pink	
 blue	 black	

**sample2c( ... )**

Make sample legend.

*Example*








```
def sample2c():
    "Make sample legend."

    d = Drawing(200, 100)

    legend = Legend()
    legend.alignment = 'right'
    legend.x = 20
    legend.y = 90
    legend.deltax = 60
    legend.dxTextSpace = 10
    legend.columnMaximum = 4
    items = 'red green blue yellow pink black white'.split()
    items = map(lambda i:(getattr(colors, i), i), items)
    legend.colorNamePairs = items

    d.add(legend, 'legend')

    return d
```

	red		pink
	green		black
	blue		white
	yellow		

**sample3( ... )**

Make sample legend with line swatches.







*Example*

```
def sample3():
    "Make sample legend with line swatches."

    d = Drawing(200, 100)

    legend = LineLegend()
    legend.alignment = 'right'
    legend.x = 20
    legend.y = 90
    legend.deltax = 60
    legend.dxTextSpace = 10
    legend.columnMaximum = 4
    items = 'red green blue yellow pink black white'.split()
    items = map(lambda i:(getattr(colors, i), i), items)
    legend.colorNamePairs = items
    d.add(legend, 'legend')

    return d
```

	red		pink
	green		black
	blue		white
	yellow		

**sample3a( ... )**

Make sample legend with line swatches and dasharrays on the lines.

*Example*

```
def sample3a():
    "Make sample legend with line swatches and dasharrays on the lines."

    d = Drawing(200, 100)

    legend = LineLegend()
    legend.alignment = 'right'
    legend.x = 20
    legend.y = 90
    legend.deltax = 60
    legend.dxTextSpace = 10
    legend.columnMaximum = 4
    items = 'red green blue yellow pink black white'.split()
    darrays = ([2,1], [2,5], [2,2,5,5], [1,2,3,4], [4,2,3,4], [1,2,3,4,5,6], [1])
    cnp = []
    for i in range(0, len(items)):
        l = LineSwatch()
        l.strokeColor = getattr(colors, items[i])
        l.strokeDashArray = darrays[i]
        cnp.append((l, items[i]))
    legend.colorNamePairs = cnp
    d.add(legend, 'legend')

    return d
```

...	red	- -	pink
■ ■	green	..	black
■ ■	blue		white
■ ■	yellow		

## textlabels

#Copyright ReportLab Europe Ltd. 2000-2004

#see license.txt for license details

#history <http://www.reportlab.co.uk/cgi-bin/viewcvs.cgi/public/reportlab/trunk/reportlab/graphics/charts/textlabels.py>

## Classes

### BarChartLabel (Label)

An extended Label allowing for nudging, lines visibility etc

### Public Attributes

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fixedEnd** None or fixed draw ends +/-

**fixedStart** None or fixed draw starts +/-

**fontName** the name of the font used

**fontSize** the size of the font

**height** the height of the text

**leading**

**leftPadding** padding at left of box

**lineStrokeColor** Color for a drawn line

**lineStrokeWidth** Non-zero for a drawn line

**maxWidth** maximum width the label can grow to

**nudge** Non-zero sign dependent nudge

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** the actual text to display

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x****y***Example*

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""

    d = Drawing(200, 100)

    # mark the origin of the label
    d.add(Circle(100,90, 5, fillColor=colors.green))

    lab = Label()
    lab.setOrigin(100,90)
    lab.boxAnchor = 'ne'
    lab.angle = 45
    lab.dx = 0
    lab.dy = -20
    lab.boxStrokeColor = colors.green
    lab.setText('Another\nMulti-Line\nString')
    d.add(lab)

    return d
```

*Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fixedEnd = None
fixedStart = None
fontName = 'Times-Roman'
fontSize = 10
height = None
leading = None
leftPadding = 0
lineStrokeColor = None
lineStrokeWidth = 0
maxWidth = None
nudge = 0
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```



## Label(Widget)

A text label to attach to something else, such as a chart axis.

This allows you to specify an offset, angle and many anchor properties relative to the label's origin. It allows, for example, angled multiline axis labels.

### Public Attributes

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fontName** the name of the font used

**fontSize** the size of the font

**height** the height of the text

**leading**

**leftPadding** padding at left of box

**maxWidth** maximum width the label can grow to

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** the actual text to display

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x**

**y**

### Example

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""

    d = Drawing(200, 100)

    # mark the origin of the label
    d.add(Circle(100,90, 5, fillColor=colors.green))
```

```
lab = Label()
lab.setOrigin(100,90)
lab.boxAnchor = 'ne'
lab.angle = 45
lab.dx = 0
lab.dy = -20
lab.boxStrokeColor = colors.green
lab.setText('Another\nMulti-Line\nString')
d.add(lab)

return d
```

### *Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fontName = 'Times-Roman'
fontSize = 10
height = None
leading = None
leftPadding = 0
maxWidth = None
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```

## **NA\_Label ( BarChartLabel )**

An extended Label allowing for nudging, lines visibility etc

### **Public Attributes**

**angle** angle of label: default (0), 90 is vertical, 180 is upside down, etc

**bottomPadding** padding at bottom of box

**boxAnchor** anchoring point of the label

**boxFillColor** the filling color of the box

**boxStrokeColor** border color of the box

**boxStrokeWidth** border width

**boxTarget** one of ('normal','anti','lo','hi')

**dx** delta x - offset

**dy** delta y - offset

**fillColor** label text color

**fixedEnd** None or fixed draw ends +/-

**fixedStart** None or fixed draw starts +/-

**fontName** the name of the font used

**fontSize** the size of the font

**height** the height of the text

**leading**

**leftPadding** padding at left of box

**lineStrokeColor** Color for a drawn line

**lineStrokeWidth** Non-zero for a drawn line

**maxWidth** maximum width the label can grow to

**nudge** Non-zero sign dependent nudge

**rightPadding** padding at right of box

**strokeColor** label text border color

**strokeWidth** label text border width

**text** Text to be used for N/A values

**textAnchor** the anchoring point of the text inside the label

**topPadding** padding at top of box

**visible** True if the label is to be drawn

**width** the width of the label

**x**

**y**

### *Example*

```
def demo(self):
    """This shows a label positioned with its top right corner
    at the top centre of the drawing, and rotated 45 degrees."""
```

```
d = Drawing(200, 100)

# mark the origin of the label
d.add(Circle(100,90, 5, fillColor=colors.green))

lab = Label()
lab.setOrigin(100,90)
lab.boxAnchor = 'ne'
lab.angle = 45
lab.dx = 0
lab.dy = -20
lab.boxStrokeColor = colors.green
lab.setText('Another\nMulti-Line\nString')
d.add(lab)

return d
```



### *Properties of Example Widget*

```
angle = 0
bottomPadding = 0
boxAnchor = 'c'
boxFillColor = None
boxStrokeColor = None
boxStrokeWidth = 0.5
boxTarget = 'normal'
dx = 0
dy = 0
fillColor = Color(0,0,0,1)
fixedEnd = None
fixedStart = None
fontName = 'Times-Roman'
fontSize = 10
height = None
leading = None
leftPadding = 0
lineStrokeColor = None
lineStrokeWidth = 0
maxWidth = None
nudge = 0
rightPadding = 0
strokeColor = None
strokeWidth = 0.1
text = 'n/a'
textAnchor = 'start'
topPadding = 0
visible = 1
width = None
x = 0
y = 0
```

## qr

```
# QRCode for Python
#
# Ported from the Javascript library by Sam Curren
# ReportLab module by German M. Bravo
#
# QRCode for Javascript
# http://d-project.googlecode.com/svn/trunk/misc/qrcode/js/qrcode.js
#
# Copyright (c) 2009 Kazuhiko Arase
#
# URL: http://www.d-project.com/
#
# Licensed under the MIT license:
# http://www.opensource.org/licenses/mit-license.php
#
# The word "QR Code" is registered trademark of
# DENSO WAVE INCORPORATED
# http://www.denso-wave.com/qrcode/faqpatent-e.html
```

## Classes

### QrCodeWidget (PlotArea)

#### Public Attributes

**background** Handle to background object e.g. Rect(0,0,width,height).

**barBorder** Width of QR border.

**barFillColor** bar color

**barHeight** Height of bars.

**barLevel** QR Code level.

**barStrokeColor** Color of bar borders.

**barStrokeWidth** Width of bar borders.

**barWidth** Width of bars.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**height** Height of the chart.

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**value** the text

**width** Width of the chart.

**x** x-coord

**y** y-coord

#### Example

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
```

```
raise shapes.NotImplementedError, msg
```

#### *Properties of Example Widget*

```
value = 'Hello World'
```

**eanbc**

## Classes

### **Ean13BarcodeWidget (PlotArea)**

#### **Public Attributes**

**background** Handle to background object e.g. Rect(0,0,width,height).

**barFillColor** bar color

**barHeight** Height of bars.

**barStrokeColor** Color of bar borders.

**barStrokeWidth** Width of bar borders.

**barWidth** Width of bars.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**fontName** fontName

**fontSize** font size

**height** Height of the chart.

**humanReadable** if human readable

**lquiet** left quiet zone length

**quiet** if quiet zone to be used

**rquiet** right quiet zone length

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**textColor** human readable text color

**value** the number

**width** Width of the chart.

**x** x-coord

**y** y-coord

#### *Example*

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

#### *Properties of Example Widget*

```
value = '123456789012'
```

## **Ean8BarcodeWidget ( Ean13BarcodeWidget )**

### **Public Attributes**

**background** Handle to background object e.g. Rect(0,0,width,height).

**barFillColor** bar color

**barHeight** Height of bars.

**barStrokeColor** Color of bar borders.

**barStrokeWidth** Width of bar borders.

**barWidth** Width of bars.

**debug** Used only for debugging.

**fillColor** Color of the plot area interior.

**fontName** fontName

**fontSize** font size

**height** Height of the chart.

**humanReadable** if human readable

**lquiet** left quiet zone length

**quiet** if quiet zone to be used

**rquiet** right quiet zone length

**strokeColor** Color of the plot area border.

**strokeWidth** Width plot area border.

**textColor** human readable text color

**value** the number

**width** Width of the chart.

**x** x-coord

**y** y-coord

### *Example*

```
def demo(self):
    msg = "demo() must be implemented for each Widget!"
    raise shapes.NotImplementedError, msg
```

### *Properties of Example Widget*

```
value = '1234567'
```